
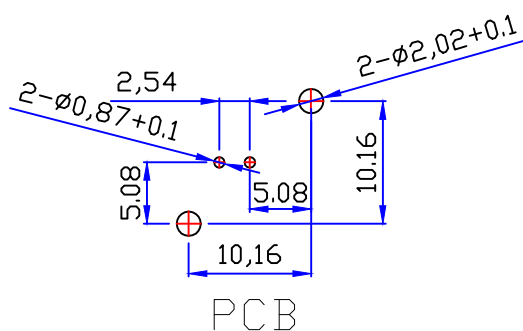



Product NO.

DOSIN-801-0468

| REV | DESCRIPTION | DWN | DATE | APPROVEN |
|-----|-------------|----------|------------|----------|
| A | First issue | Mr. Wang | 2017/01/12 | |
| B | | | | |



PCB

SPECIFICATIONS:

Impedance: 75 Ohms

Frequency Range: DC~6G

VSWR: 1.3max

Working Voltage: 500v RMS @ SEA level

Insulation Resistance: 5000 Ohms min

Temperature Range: -40°C TO +140°C

Drawings products are in line with ROHS standards

NOTE:

4
1

Tolerance

| | |
|---------|-------|
| X. | ±0.15 |
| X.X | ±0.10 |
| X.XX | ±0.05 |
| Angular | ±5° |



Dosin Industrial (H.K) Co., Ltd


东莞市德索五金电子制品有限公司

Dosin Hardware Electronics Co., Ltd

E-mail: dosin2005@163.com
 dosin2005@dosin-china.com
 Web: http://www.dosinconn.com
 TEL: (0086) 769-81153906
 FAX: (0086) 769-81875836

DRAWN
Zelin. Zhang

View



CHECKED

UNIT

MM

Name: 15.8mm BNC JACK FOR PCB DIP180° CONNECTOR

APPROVALS

SCALE

1:1

DateTime
2017/01/12CAD FILE
H/company drawings/BD

SHEET: 1 OF 1

| | | | |
|----|------------------|------------------|--------------|
| 1 | Body | Zinc | NI:80-120u" |
| 2 | Contact pin | Beryllium copper | Gold:1-1.5u" |
| 3 | Insulation | POM | None |
| 4 | Gasket | TE | NI:80-120u" |
| 5 | NUT | Brass | NI:80-120u" |
| NO | Component Number | Material | Finish |