



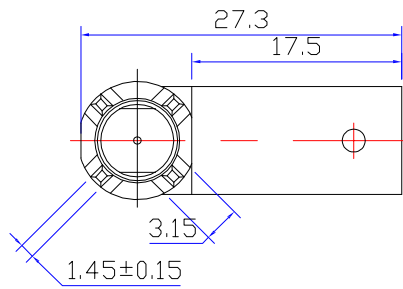





Product NO.		RHT-610-0030		
REV	DESCRIPTION	DWN	DATE	APPROVEN
R1.0	First issue	Mr. Wang	2016/03/05	JIM. KING
R2.0	First issue	Gavin	2023/09/27	JIM. KING

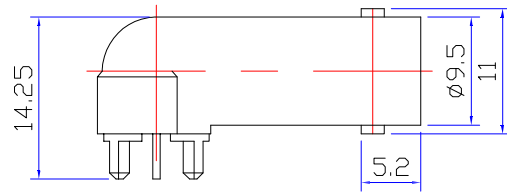

PCB HOLE CONFIGURATION
RECOMMENDED PANEL CUTOUTS

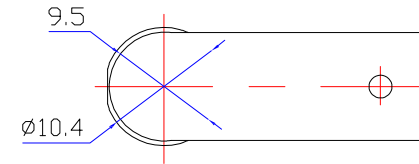

Specifications

Impedance:50, 75ohms
 Frequency Range:DC~4G
 VSWR:1.3MAX
 Voltage Ratin:500 Volts RMS Max Continuous
 Dielectric Withstanding Voltag:1500 VRMS MaxTemperature
 Insulation Resistance:5000 MΩ Min
 Mating Cycles:500 Min
 Range:-55°C TO +165°C

3	Center pin	Brass	Gold-plated	1
2	Insulating	POM	None	1
1	Body	Zinc	Nickel plated	1
NO	DESCRIPTION	MATERIAL	FINISH	QTY

-TOLERANCES- UNLESS OTHERWISE SPECIFIED	RENHOTEC GROUP				
			PART DESCRIPTION: BNC JACK FOR PCB CONNECTOR		
UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 - 8mm ± 0.10mm 8 - 30mm ± 0.15mm 30 - 120mm ± 0.20mm	Appd:	JIM. KING	P/N: RHT-610-0030		
	Check:		Date	Scale	Unit
	Draw:	Gavin	2023.09.27	Free	MM
			Type	Page	
			Z	1/1	