




Product NO.	Renhotec-610-0045			
REV	DESCRIPTION	DWN	DATE	APPROVEN
A	First issue	Mr. Wang	2016/3/08	John kine

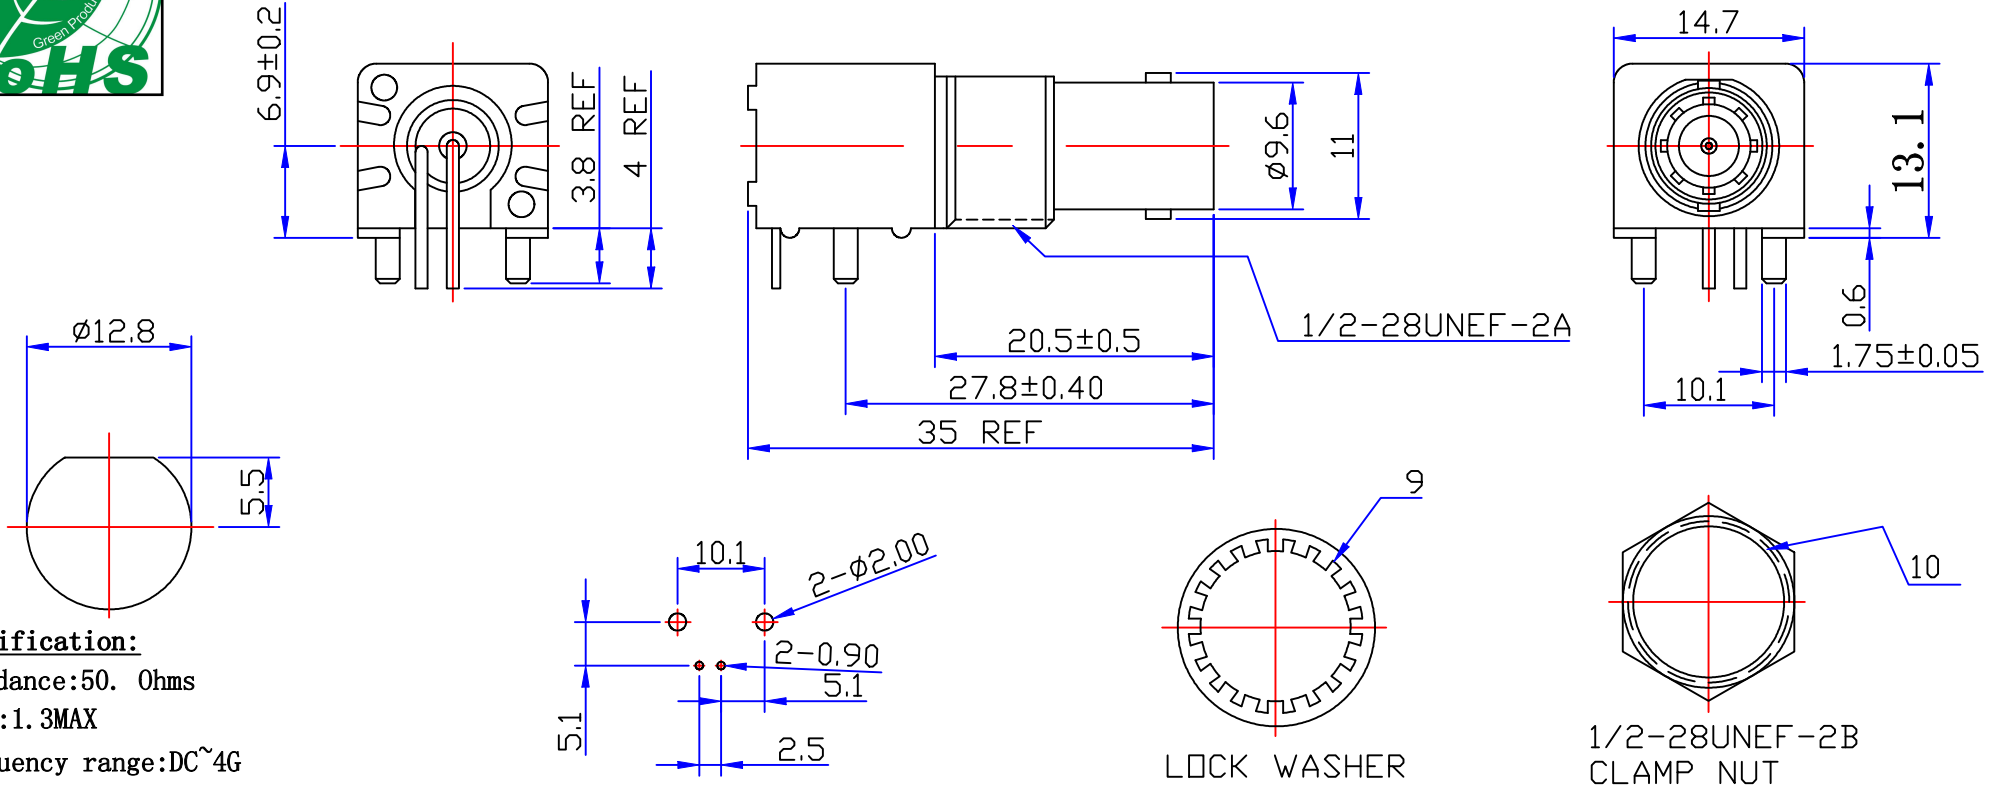

Specification:

Impedance: 50. Ohms
 VSWR: 1.3MAX
 Frequency range: DC~4G
 Working Voltage: 500V rms @ sea level
 Insulation resistance: 5000 Ohms min
 Temperature range: -55°C TO +155°C
 Relative temperature: $\leq 95\%$ ($40^\circ C \pm 2^\circ C$)
 Drawings products are in line with ROHS standards. 12 INCH-POUNDS MAX

RECOMMENDED MOUNTING HOLE
 MAXIMUM PANEL THICKNESS: 5.5MM
 RECOMENDED MOUNTING TORQUE:

1	Body	Zinc	NI:80-120u"	1
2	Center contact	phosphor	AU:1u"	1
3	Lead	Iron	AU:1u"	1
4	Fixed footrest	Iron	NI:80-120u"	2
5	Insulator	POM	White	1+1
6	Fixed mount	PBT	Black	1
7	Washer	Brass	NI:80-120u"	1
8	Hex nut	Brass	NI:80-120u"	1
9				
10				
NO	Component Number	Material	Finish	QTY

NOTE:
 DRAWN 2016/03/08
 Zelin. Zhang
 CHECKED
 APPROVALS
 John Kine 89.03.2016

Tolerance	0-6 ± 0.10 6-30 ± 0.20 30-120 ± 0.30 Angular $\pm 2^\circ$
View	
UNIT	MM
SCALE	1:1



RENHOTEC GROUP

Name: BNC BLACK Jack CONNECTOR (13.1)

SIZE A	Product NO. RENHOTEC-610-0045	REV B
DateTime 2016/3/08	CAD FILE D/company drawings/BD	SHEET: 1 OF 1