


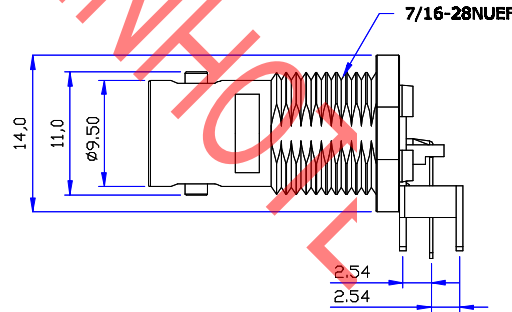
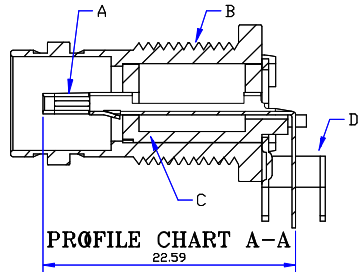
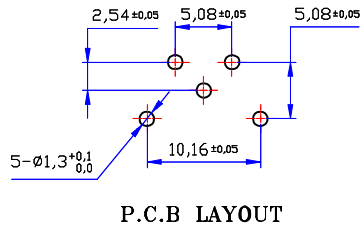


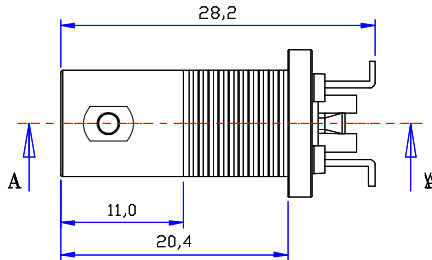


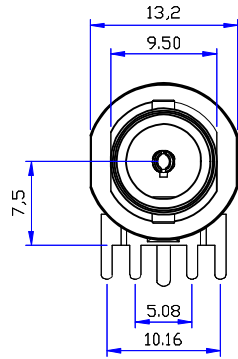

Product NO.	Renhotec-610-0056			
REV	DESCRIPTION	DWN	DATE	APPROVEN
A	First issue	Mr. Wang	2016/3/10	John kine



Specifications

Impedance: 75 Ohms
 Frequency Range: DC~3G
 VSWR: 1.3MAX
 Working Voltage: 500V rms @ sea level
 Insulation Resistance: 5000 Ohms min
 Temperature Range: -55°C TO +155°C
 Relative Temperature: ≤95% (40°C ±2°C)
 Drawings products are in line with ROHS standards

NOTE:		Tolerance	0-6	±0.10
DRAWN	2016/03/10		6-30	±0.20
Zelin. Zhang		View	30-120	±0.30
CHECKED			Angular	±2°
APPROVALS		UNIT	MM	
John Kine	19.03.2016	SCALE	1:1	



RENHOTEC GROUP

Name: BNC JACK CONNECTOR			
SIZE	Product NO. RENHOTEC-610-0056	REV	
A		B	
DateTime	CAD FILE	SHEET: 1 OF 1	
2016/3/10	D/company drawings/BD		

NO	DESCRIPTION	MATERIAL	FINISH	QTY
3	BY-00001-NI-0	ZINC	NICKE	1
2	PN-00002-NI-0	Brass	GOLD	1
1	IN-00001-0	POM	White	1