

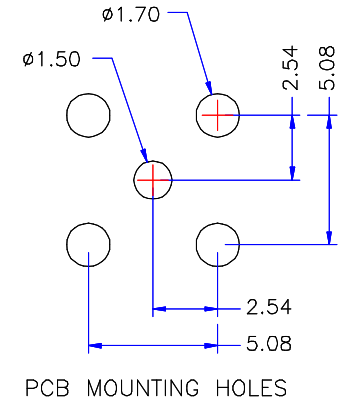


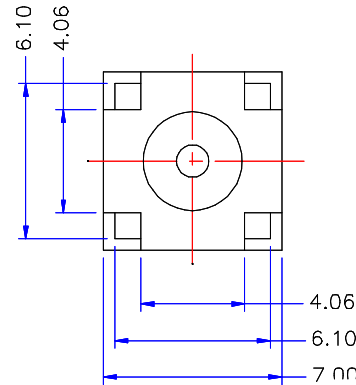

Product NO.	Renhotec-612-0009			
REV	DESCRIPTION	DWN	DATE	APPROVEN
A	First issue	Mr. Wang	2016/3/29	John kine

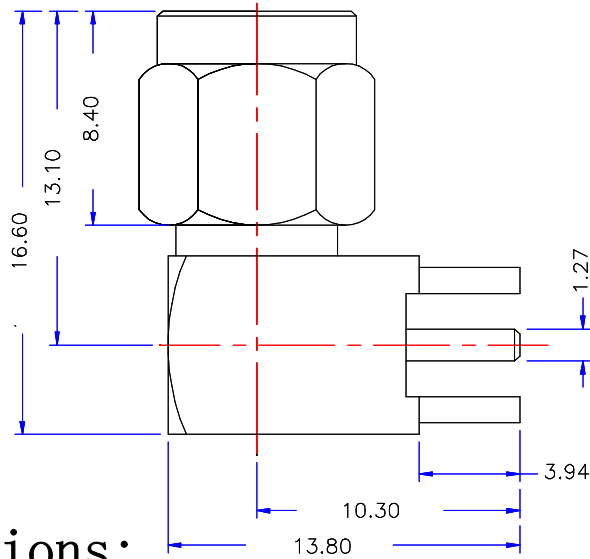

Specifications:

IMPEDANCE: 50 Ohms

Frequency range: 0~6GHZ

VSWR: 1.5MAX

Working voltage: 500V rms @ sea level

Insulation resistance: 5000 Ohms min

Temperature range: -65°C TO +165°C

Relative temperature: ≤95% (40° C ± 2° C)

1	Body	Brass	Au:1u"
2	Insulator	TEFLON	White
3	Center contact	Brass	AU:3u"
4	Washer	Brass	Au:1u"
5			
6			
7			
8			
9			
10			
NO	Component Number	Material	Finish

NOTE:	
DRAWN	2016/03/29
Zelin. Zhang	
CHECKED	
APPROVALS	29.03.2016
John Kine	

Tolerance	0-6 ±0.10 6-30 ±0.20 30-120 ±0.30 Angular ±2°
View	
UNIT	MM
SCALE	1:1



RENHOTEC GROUP

Name: SMA Jack CONNECTOR

SIZE	Product NO. RENHOTEC-612-0009	REV
A		B
DateTime	CAD FILE	SHEET: 1 OF 1
2016/3/29	D/company drawings/BD	