

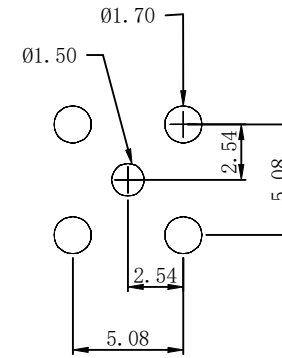




REV	DESCRIPTION	DWN	DATE	APPROVEN
A	Add the assembly schematic diagram	Li	2026/01/31	Jason

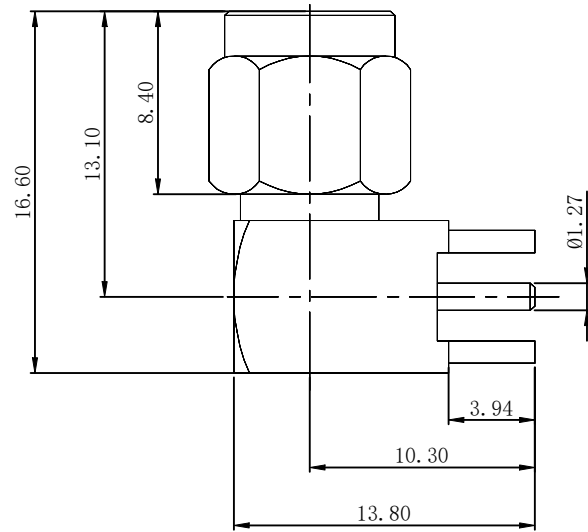

PCB MOUNTING HOLES

Specifications:

IMPEDANCE: 50 Ohms  
 Frequency range: 0~6GHZ  
 VSWR: 1.5MAX  
 Voltage Rating: 335 Volts RMS  
 Continuous  
 Dielectric withstand voltage: 1000 V  
 Service life: ≥500  
 Insulation Resistance ≥5000MΩ  
 Center contact resistance: ≤3mΩ  
 Outer contact resistance: ≤2mΩ  
 Operation Temperature: -55°C ~ +165°C

4	WASHER	BRASS	GOLD	1
3	CONTACT PIN	BRASS	GOLD	1
2	INSULATOR	PTFE	NINE	1
1	BOOY	BRASS	GOLD	1
NO	DESCRIPTION	MATERIAL	FINISH	QTY

-TOLERANCES- UNLESS OTHERWISE SPECIFIED	<b>RENHOTEC GROUP</b>					
		PART DESCRIPTION: SMA Jack CONNECTOR				
UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 - 6mm ± 0.10mm 6 - 30mm ± 0.20mm 30 - 120mm ± 0.30mm	Appd:	P/N: RHT-612-0009				
	Check: Jason	Date: 2026.01.31	Scale: Free	Unit: MM	Type: Z	Page: 1/1
	Draw: Li	Date: 2026.01.31	Scale: Free	Unit: MM	Type: Z	Page: 1/1