




SPECIFICATIONS;

Impedance : 50 Ohms
 Frequency Range :DC~18 GHz
 Directric Withstanding Voltage : 750 VRMS
 Insulation Resistance : 5000 meghms
 Temperture Range : -55~125°C
 VSWR : 1.2:1 max @ 18GHz

Product NO.	Renhotec-612-0227			
REV	DESCRIPTION	DWN	DATE	APPROVEN
A	First issue	Mr. Wang	2017/3/1	John kine

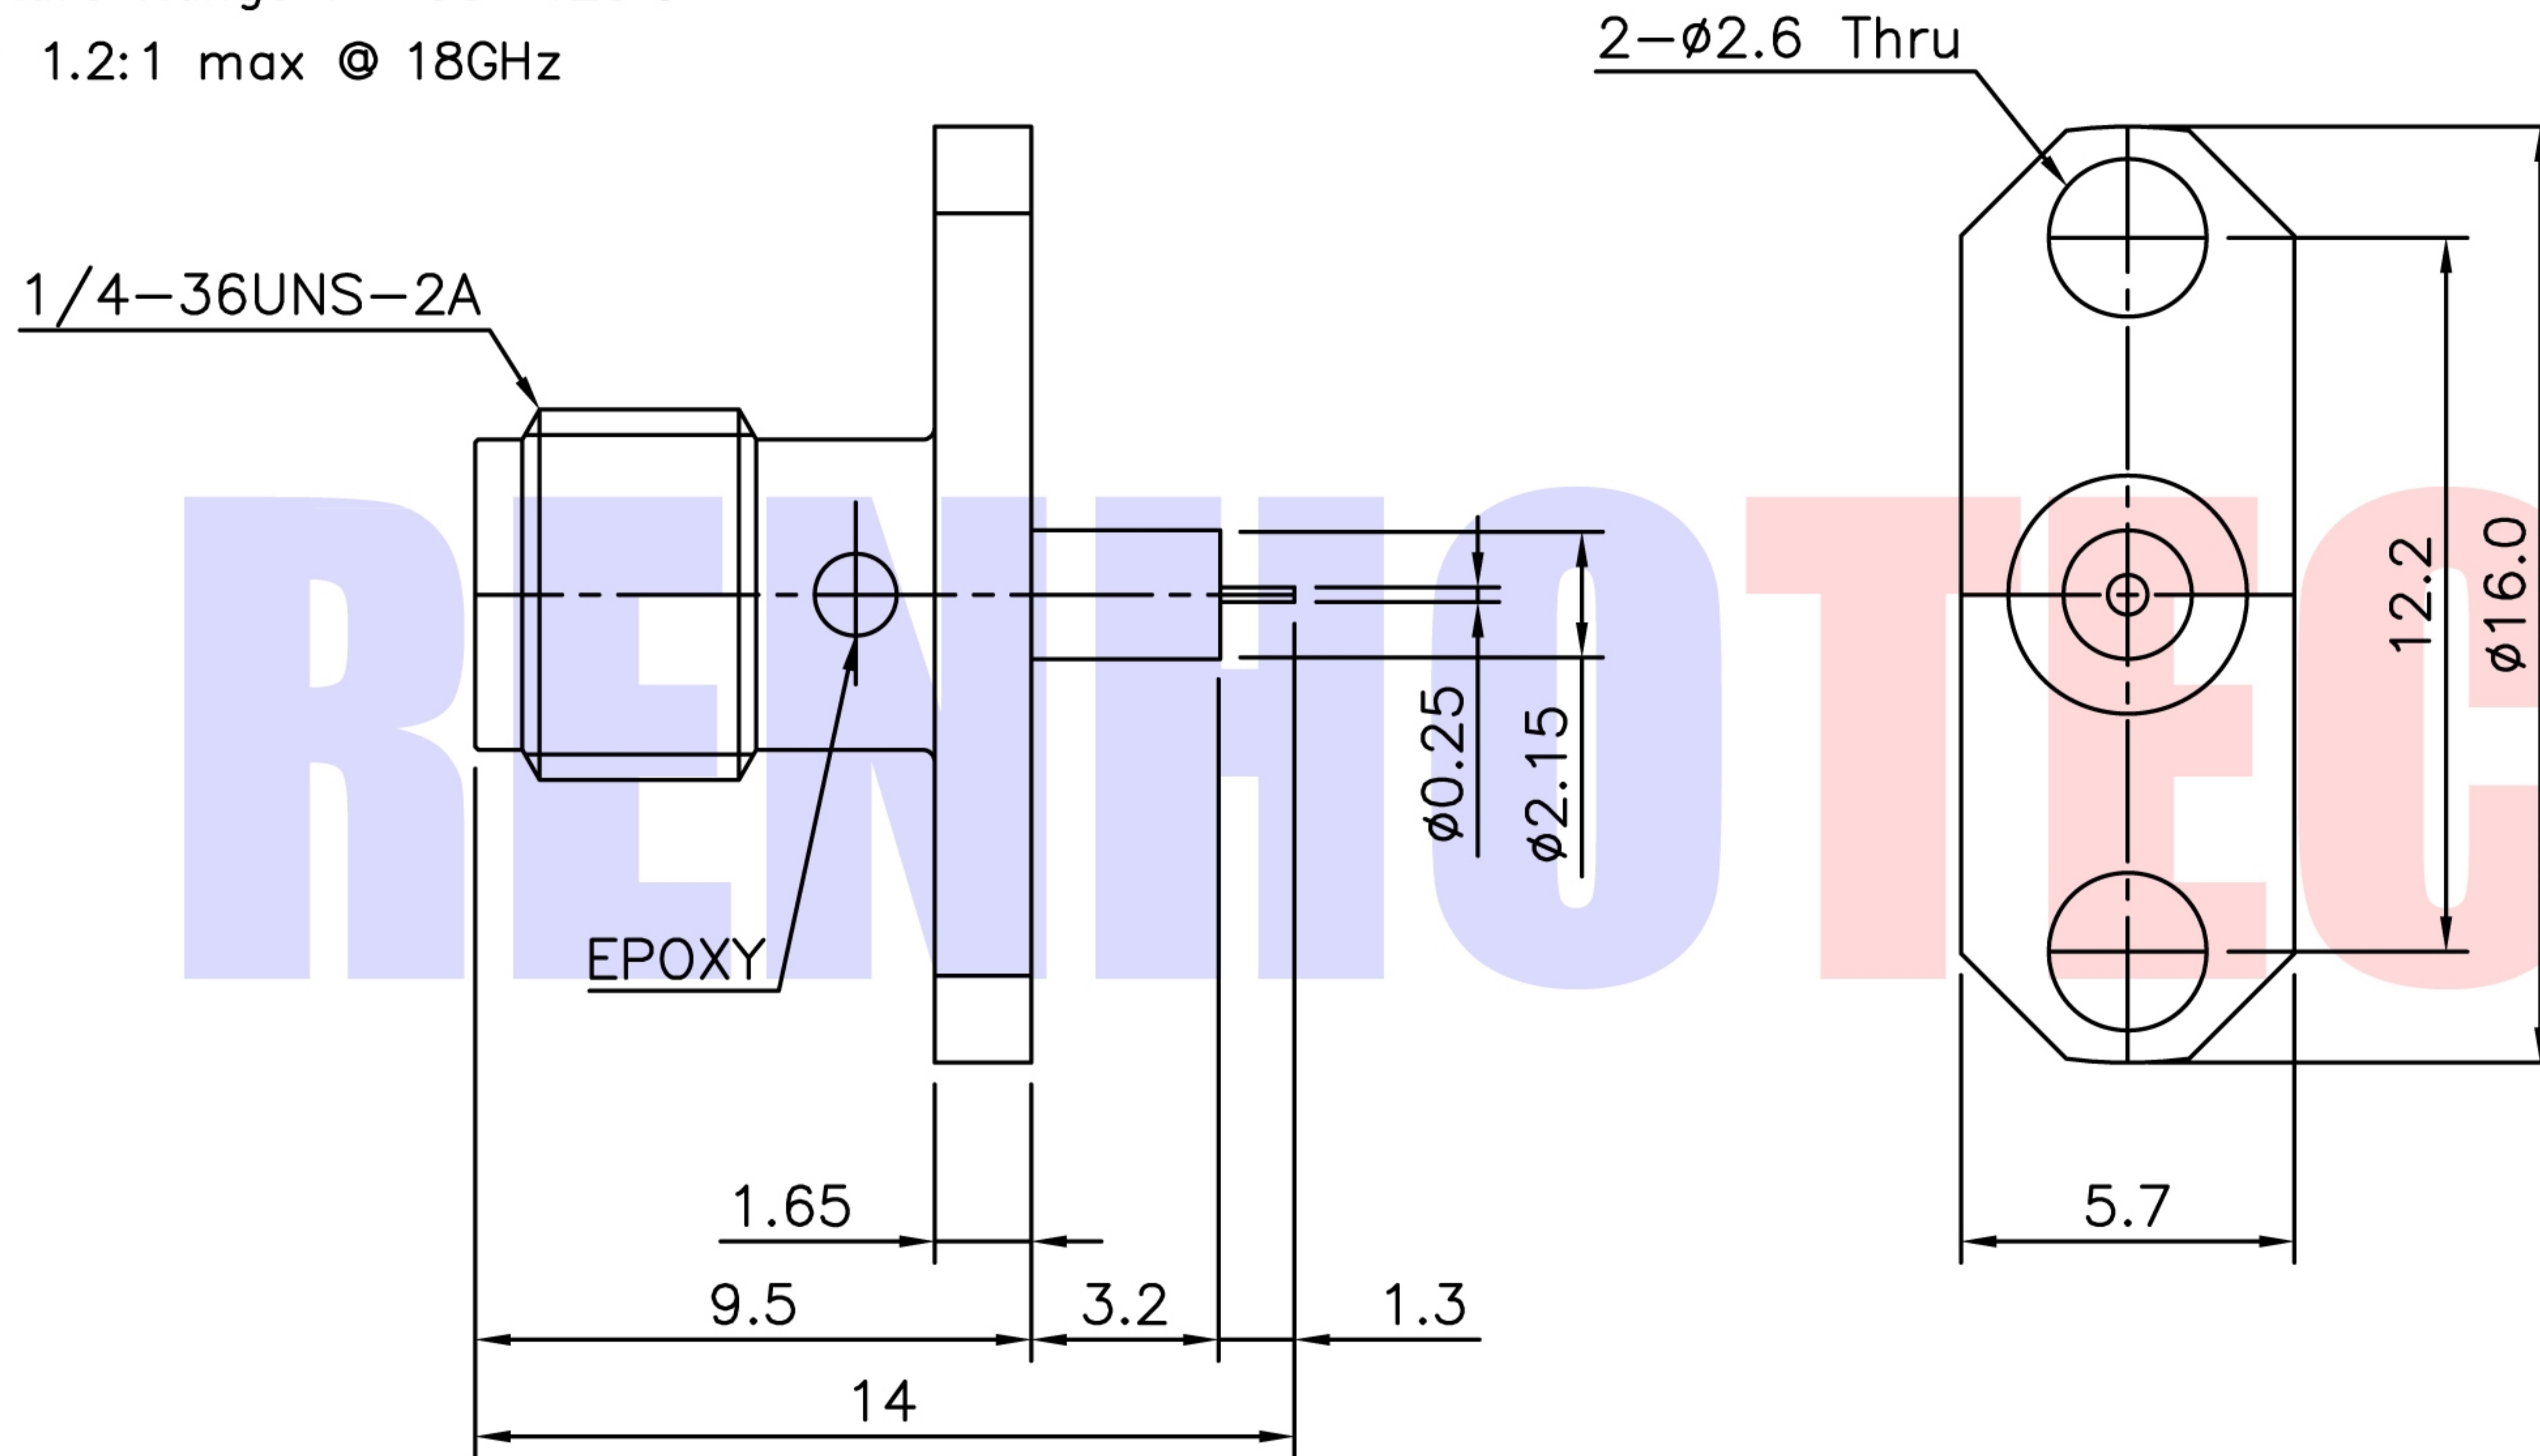

Connector parts	Materials	Finish
Body	Stainless steel	Passivated
Center contact	Beryllium copper	Gold Plated
Insulator	PTFE	-

NOTE:		Tolerance	0-6 ±0.10 6-30 ±0.20 30-120 ±0.30 Angular ±2°
DRAWN Zelin. Zhang	2017/3/1	View	
CHECKED		UNIT	MM
APPROVALS John Kine	2017/3/1	SCALE	1:1



RENHOTECH GROUP

Name: SMA 2Hole Panel Female Micro Coaxial END Receptacle

SIZE A	Product NO. RHT-612-0227	REV B
DateTime 2017/3/1	CAD FILE D/company drawings/BD	SHEET: 1 OF 1