




Product NO.	Renhotec-612-0233			
REV	DESCRIPTION	DWN	DATE	APPROVEN
A	First issue	Mr. Wang	2017/3/1	John kine

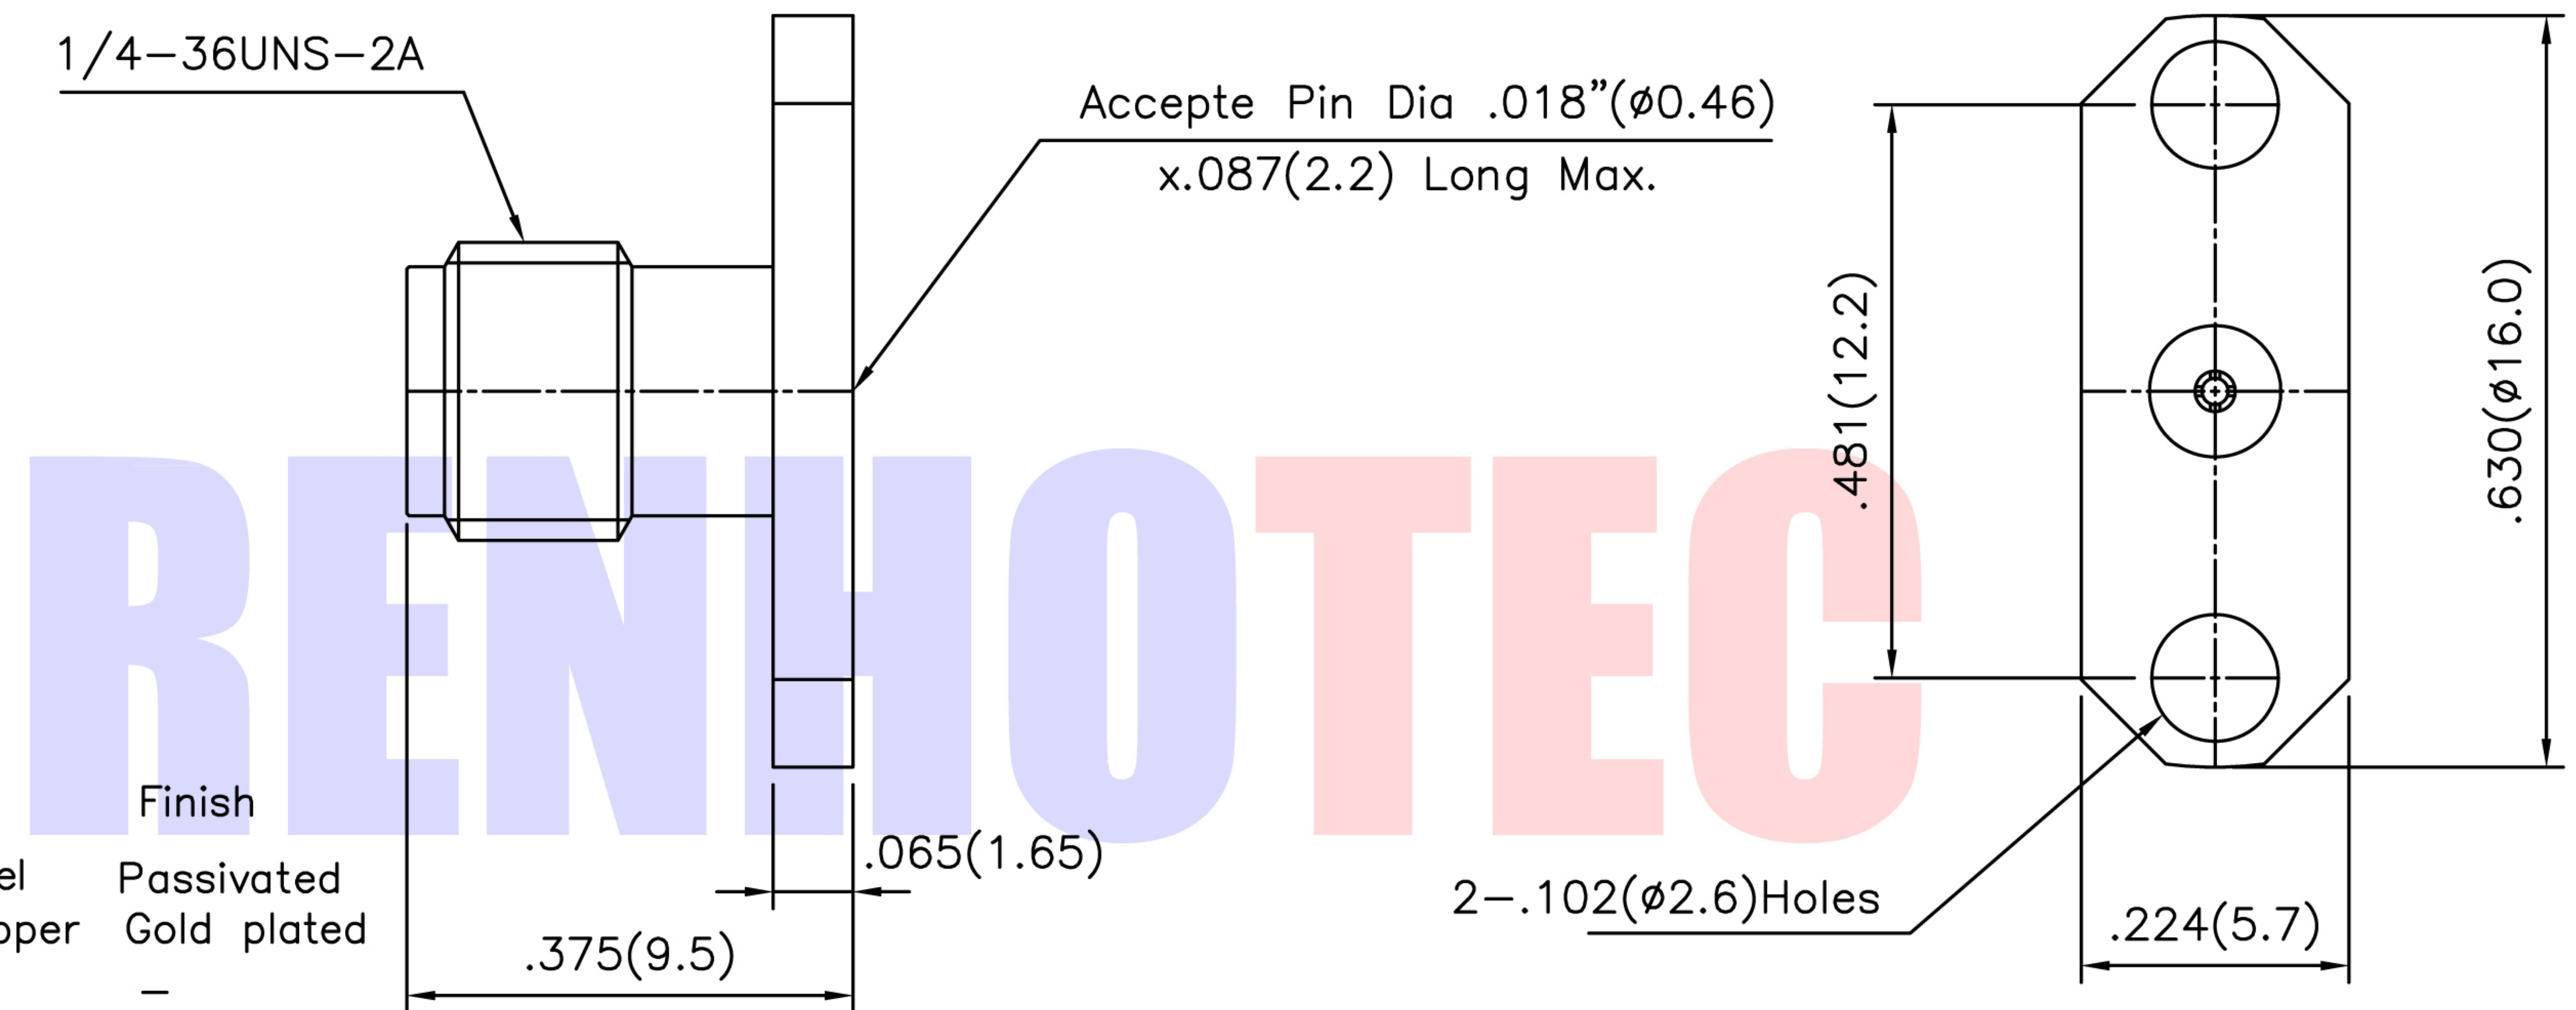

Connector parts	Materials	Finish
Body	Stainless steel	Passivated
Center contact	Beryllium copper	Gold plated
Insulator	PTFE	-

SPECIFICATIONS;

IMPEDANCE : 50 Ohms

Frequency Range : DC~20 GHz

Directric Withstanding Voltage : 750 VRMS

Insulation Resistance : 5000 meghms

Temperture Range : -55~125°C

VSWR : 1.05+0.01F. F Operating Frequency in GHz

NOTE:		Tolerance	0-6 ±0.10 6-30 ±0.20 30-120 ±0.30 Angular ±2°		
DRAWN	2017/3/1				
Zelin. Zhang	2017/3/1	View		Name: SMA Jack 2Hole Panel(.018" PIN)Field Receptacle	
CHECKED		UNIT	MM	SIZE A	Product NO. RHT-612-0233
APPROVALS	2017/3/1	SCALE	1:1	DateTime	CAD FILE
John Kine	2017/3/1			2017/3/1	D/company drawings/BD
				SHEET: 1 OF 1	