




Product NO.	Renhotec-612-0255			
REV	DESCRIPTION	DWN	DATE	APPROVEN
A	First issue	Mr. Wang	2017/3/2	John kine

**SPECIFICATIONS**

Impedance: 50 OHM  
 Frequency Range: DC~18 GHz  
 Voltage rating: 335 Vrms  
 Dielectric Withstanding Voltage: 1000 Vrms  
 Contact retention 6lbs axial  
 Temperature Range: -65°C to +125°C  
 Durability: 500 Cycles  
 Interface Dimensions: MIL-STD-348A

1/4-36UNS-2A

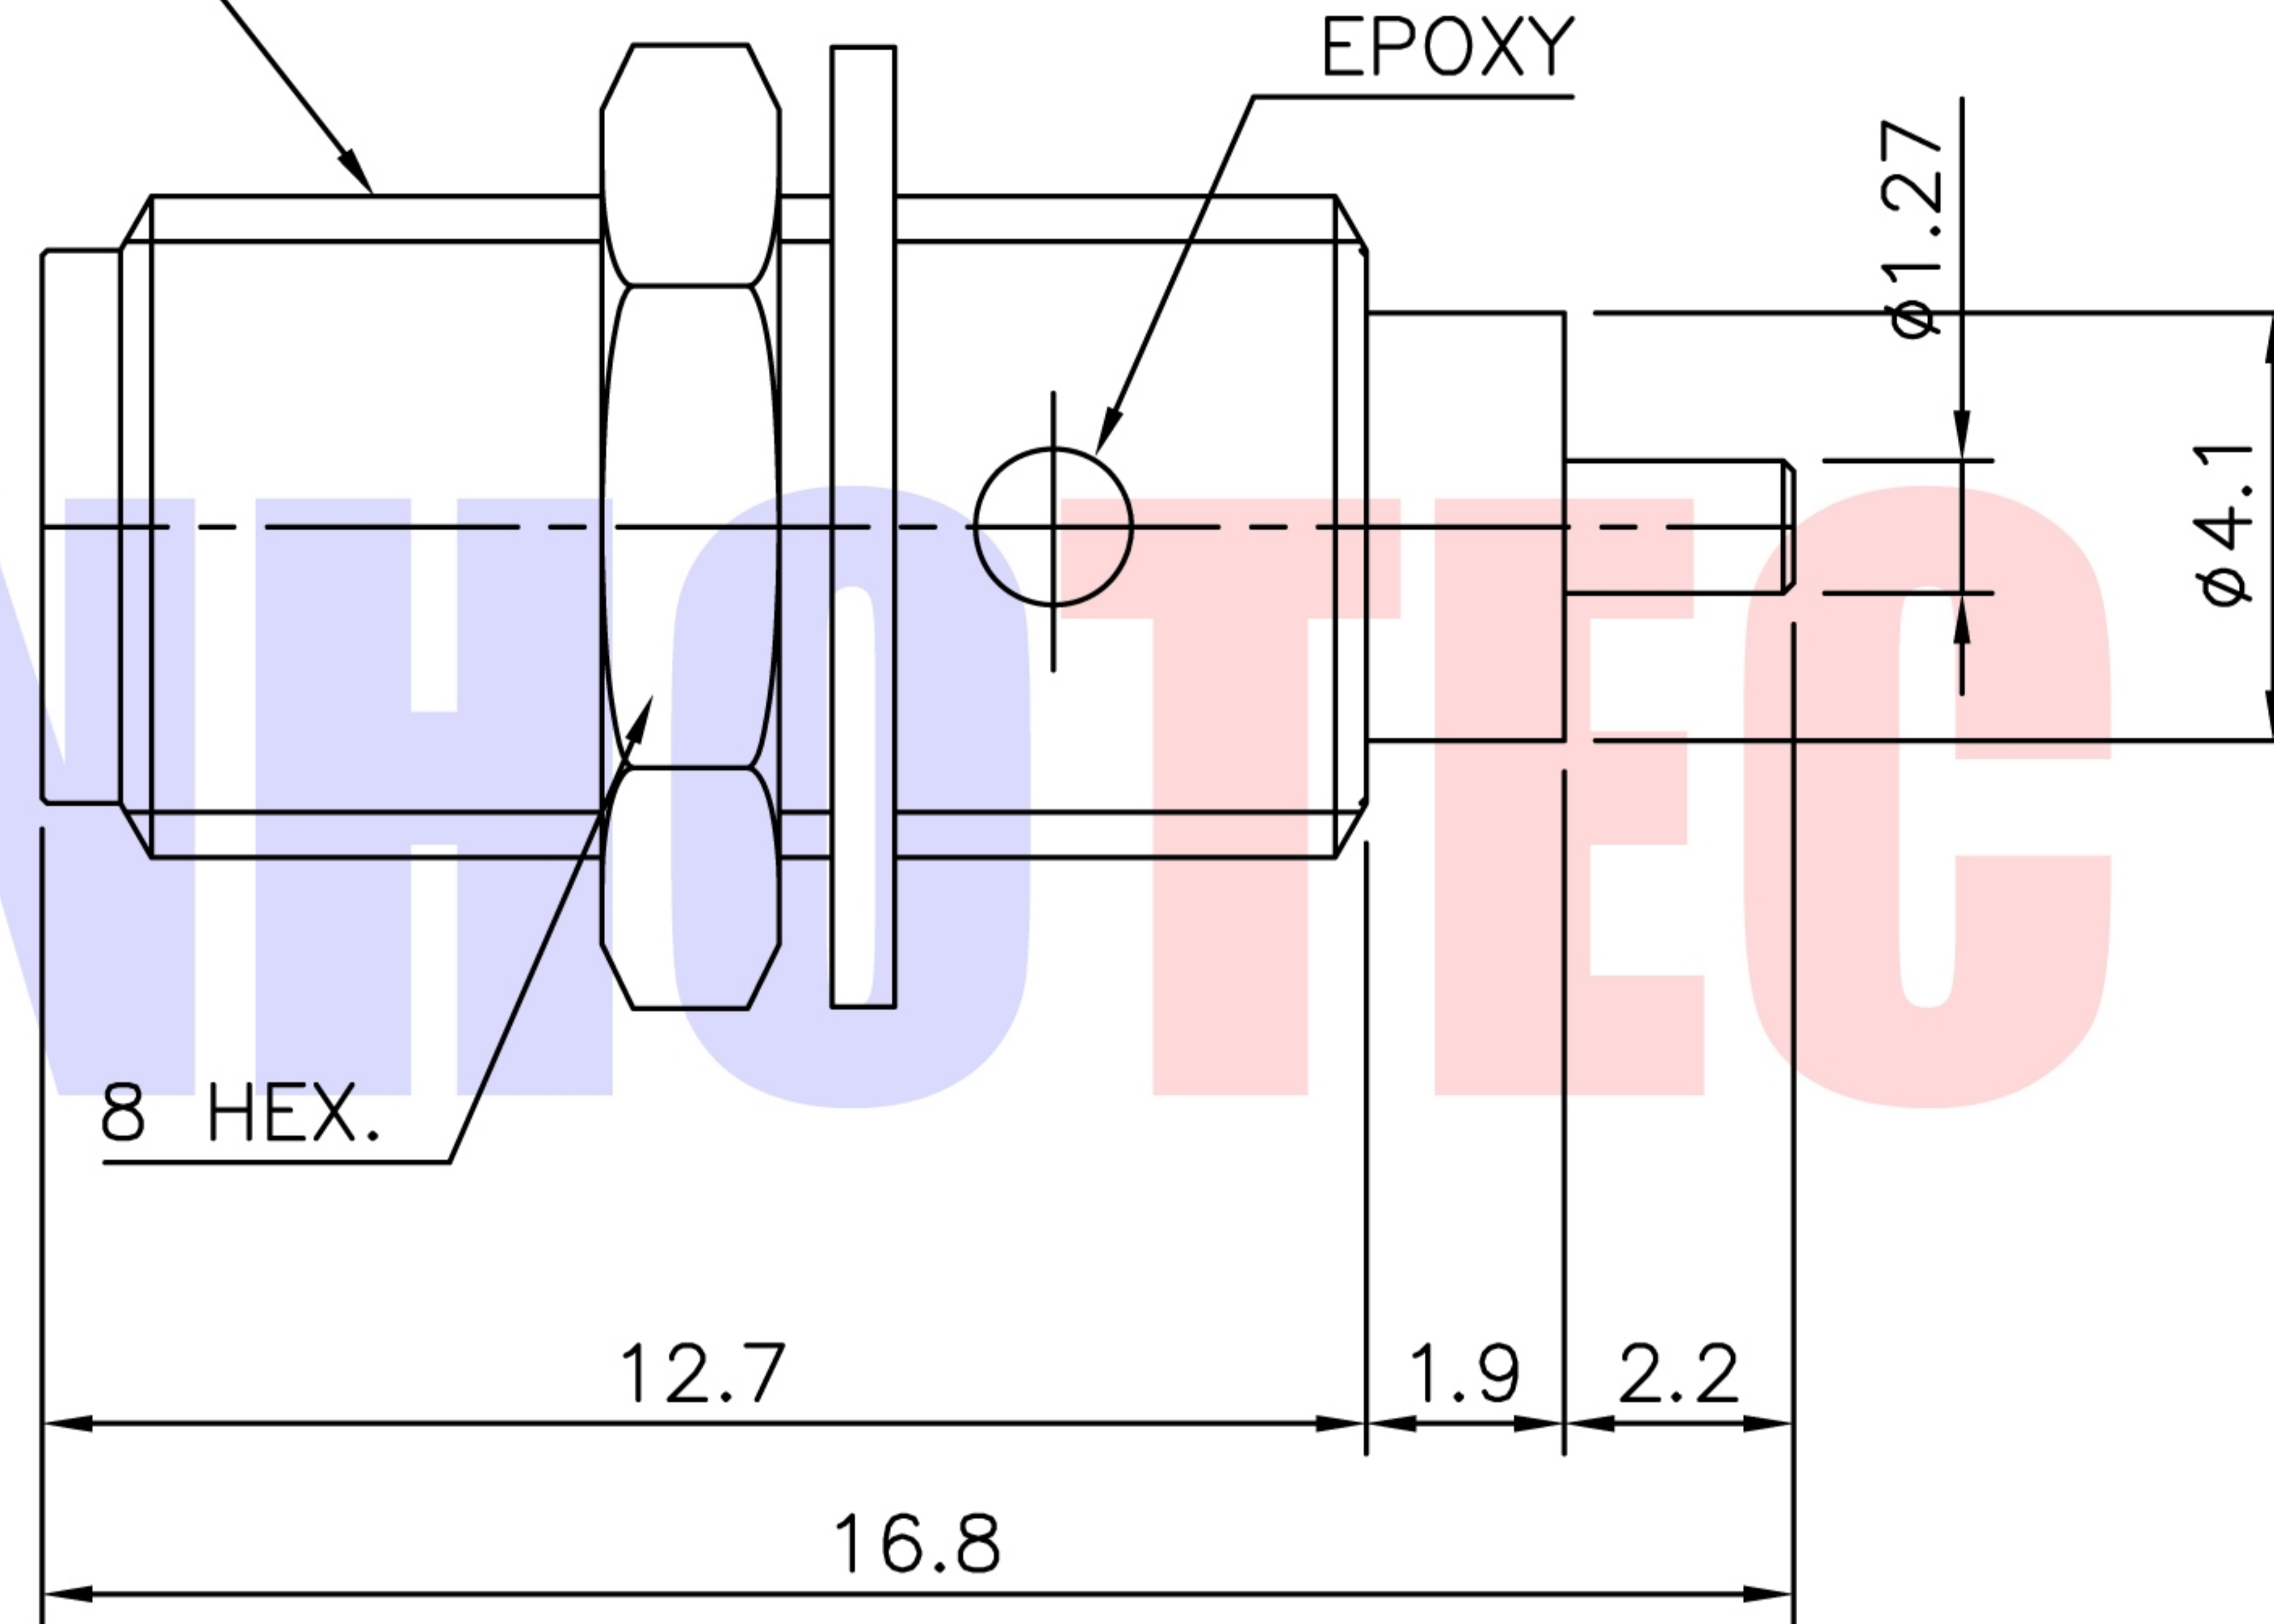

Connector parts	Materials	Finish
Body,Nut,Washer	Stainless steel	Gold plated
Center contact	Beryllium copper	Gold Plated
Insulator	PTFE	-

SMA-Bulkhead JACK  
 Receptacles  
 (Epoxy-Cativated)

NOTE:		Tolerance	0-6 ±0.10		
			6-30 ±0.20		
			30-120 ±0.30	Name: SMA Bulkhead Jack Receptacle	
			Angular ±2°		
DRAWN	Zelin. Zhang	2017/3/2	View	SIZE A Product NO. RHT-612-0255 REV B	
CHECKED			UNIT		
APPROVALS	John Kine	2017/3/2	SCALE	1:1	DateTime
					2017/3/2
					CAD FILE
					D/company drawings/BD
					SHEET: 1 OF 1