



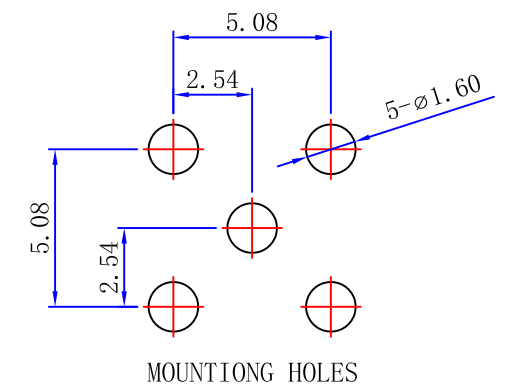

| | | | | |
|-------------|-------------|--------------|------------|-----------|
| Product NO. | | RHT-612-0266 | | |
| REV | DESCRIPTION | DWN | DATE | APPROVEN |
| R1.0 | First issue | Mr. Wang | 2017/03/02 | JIM. KING |
| R2.0 | First issue | Gavin | 2020/02/24 | JIM. KING |

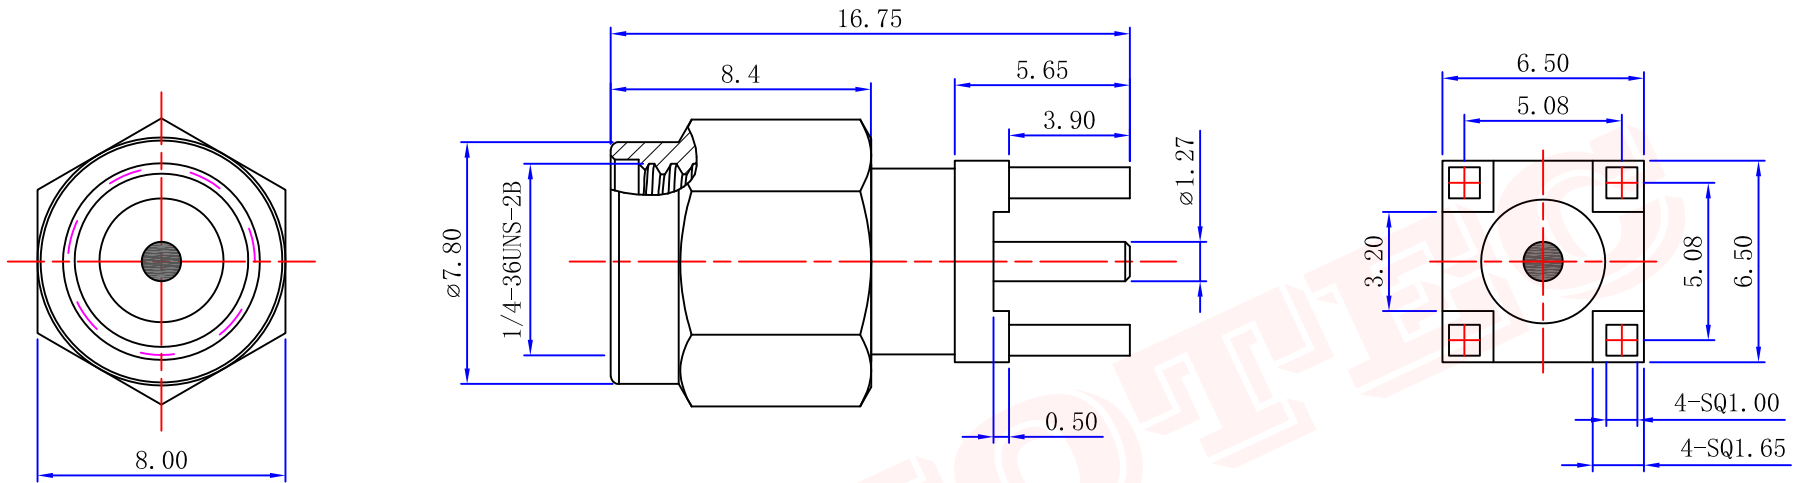

Specifications:

IMPEDANCE: 50 Ohms
 Frequency range: 0~6GHZ
 VSWR: 1.5MAX
 Working voltage: 500V rms @ sea level
 Insulation resistance: 5000 Ohms min
 Temperature range: -40°C TO +125°C

| | | | | |
|----|----------------|------------------|--------|-----|
| 3 | Center Contact | Beryllium Copper | Gold | 1 |
| 2 | Insulator | Ptfe | None | 1 |
| 1 | Body | Brass | Gold | 1 |
| NO | DESCRIPTION | MATERIAL | FINISH | QTY |

| | | | | | |
|---|-----------|--|-------|----------------------|------|
| -TOLERANCES- UNLESS OTHERWISE SPECIFIED | | RENHOTEC GROUP | | | |
| UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 - 8mm ± 0.15mm 8 - 30mm ± 0.20mm 30 - 120mm ± 0.30mm | | PART DESCRIPTION: SMA Straight PCB Plug | | P/N: RHT-612-0266 | |
| Appd: | JIM. KING | Date | Scale | Unit | Type |
| Check: | | 2020.02.24 | Free | MM | Z |
| Draw: | Gavin | | | | 1/1 |