




ELECTRICAL RATINGS

Impedance : 50 ohm
 Frequency Range : DC~18GHz
 Insulation Resistance : 5000MΩ min
 Contact Resistance : < 3mΩ
 Working Voltage : 335 VRMS max
 Dielectric Withstanding Voltage : 1000V min

Product NO.	Renhotec-612-0268			
REV	DESCRIPTION	DWN	DATE	APPROVEN
A	First issue	Mr. Wang	2017/3/2	John kine

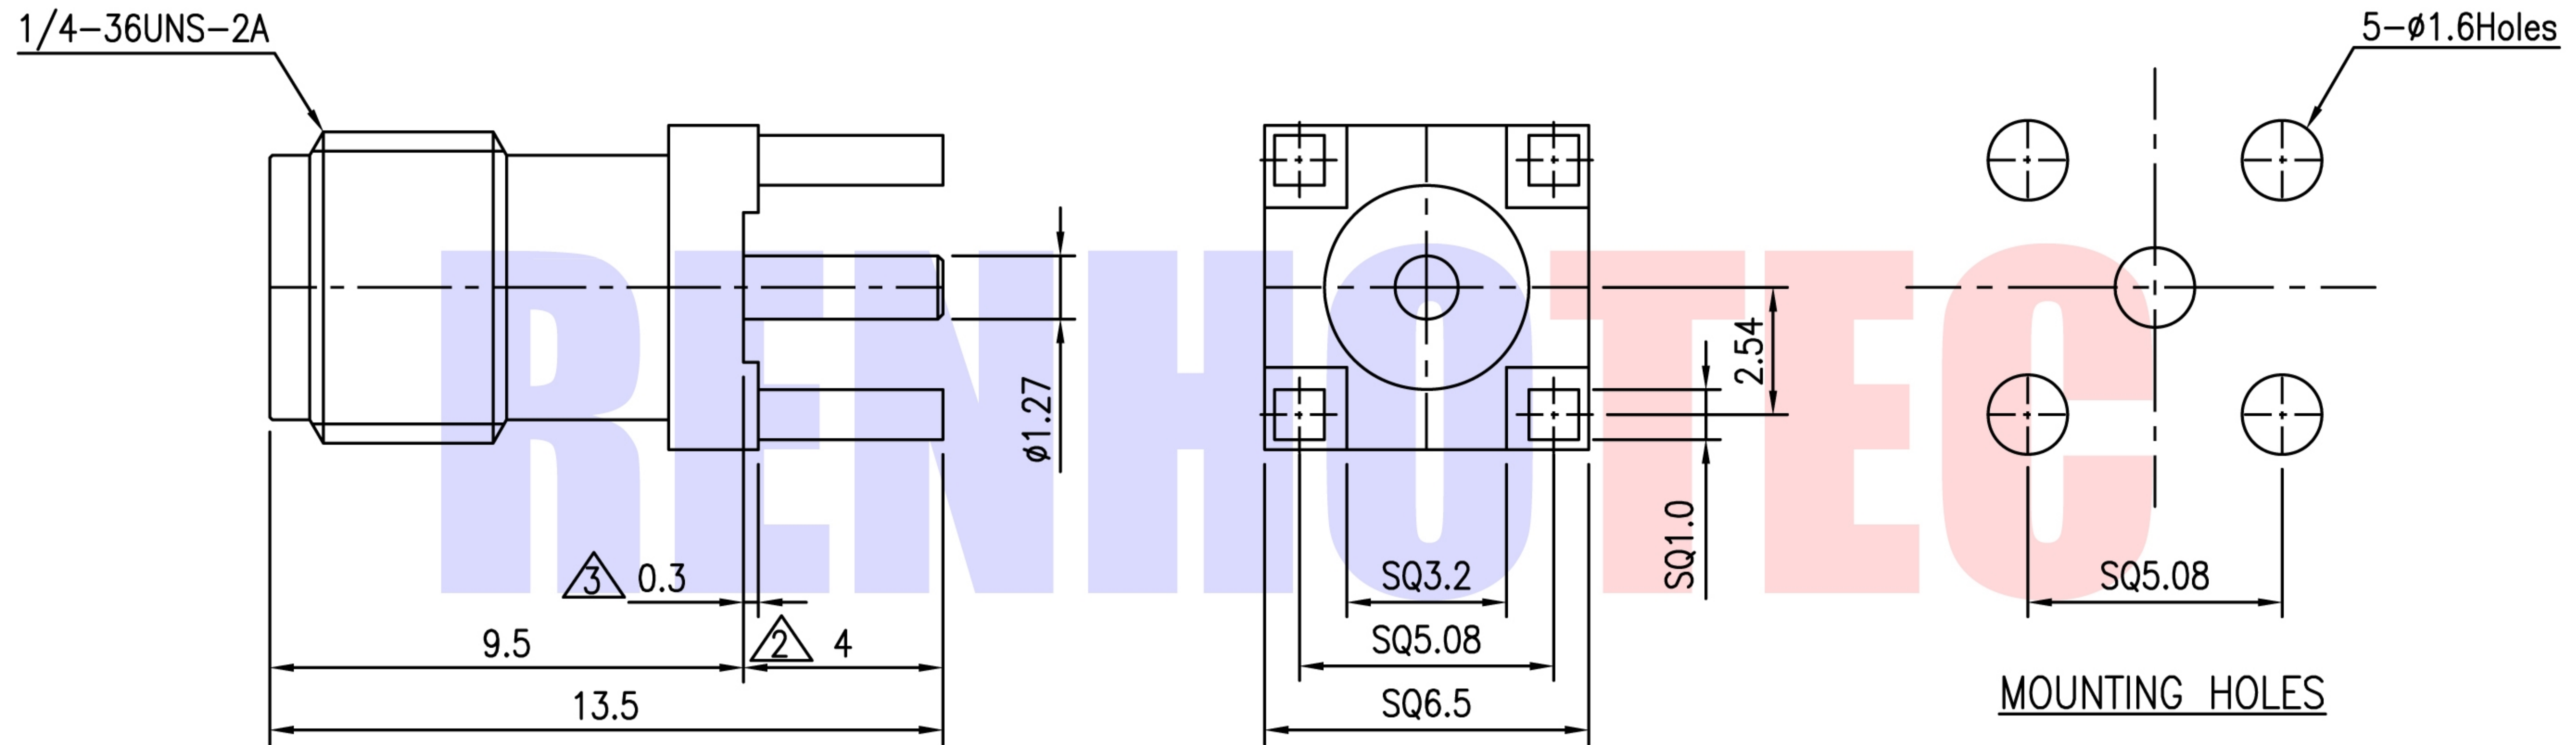

Connector parts	Materials	Finish
Body	Brass	Gold Plated
Center contact	Beryllium copper	Gold Plated
Insulator	PTFE	-

NOTE:		Tolerance	0-6	± 0.10
DRAWN			6-30	± 0.20
Zelin. Zhang	2017/3/2	View	30-120	± 0.30
CHECKED			Angular	$\pm 2^\circ$
APPROVALS		UNIT	MM	
John Kine	2017/3/2	SCALE	1:1	



RENHOTEC GROUP

Name: SMA Straight PCB Jack			
SIZE A	Product NO. RHT-612-0268	REV B	
DateTime 2017/3/2	CAD FILE D/company drawings/BD	SHEET: 1 OF 1	