




**ELECTRICAL RATINGS**

Impedance : 50 ohm  
 Frequency Range : DC~6 GHz  
 Insulation Resistance : 5000MΩ min  
 Contact Resistance : < 3mΩ  
 Working Voltage : 335 VRMS max  
 Dielectric Withstanding Voltage : 1000V min

Product NO.	Renhotec-612-0271			
REV	DESCRIPTION	DWN	DATE	APPROVEN
A	First issue	Mr. Wang	2017/3/2	John kine

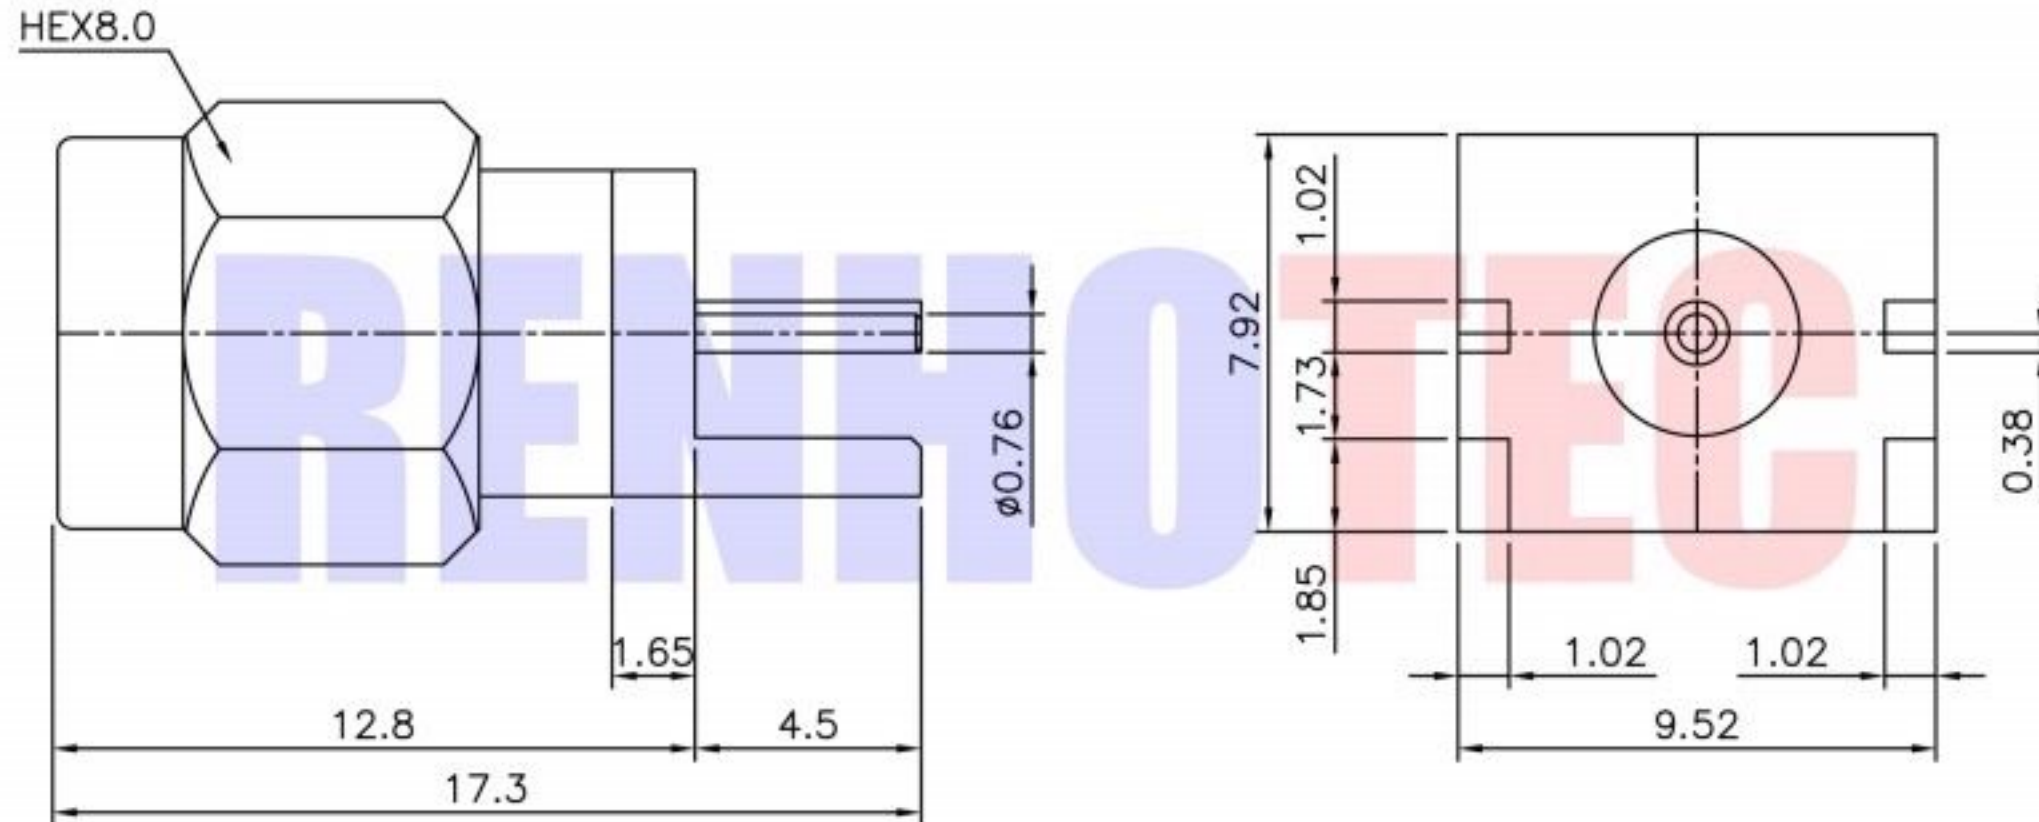

Connector parts	Materials	Finish
Coupling Cap	Brass	Gold Plated
Body	Brass	Gold Plated
Center contact	Brass	Gold Plated
Insulator	TEFLON	-

SMA PCB Edge Mount Plug Receptacle  
 -Round Contact(1.60mm Board)

NOTE:		Tolerance	0-6 ±0.10 6-30 ±0.20 30-120 ±0.30 Angular ±2°	<b>RENHOTEC GROUP</b> <a href="http://www.renhotec.com">www.renhotec.com</a>
DRAWN	Zelin. Zhang 2017/3/2	View		
CHECKED		UNIT	MM	Name: Edge Mount SMA Plug
APPROVALS	John Kine 2017/3/2	SCALE	1:1	SIZE A Product NO. RHT-612-0271
				DateTime 2017/3/2
				CAD FILE D/company drawings/BD
				SHEET: 1 OF 1