


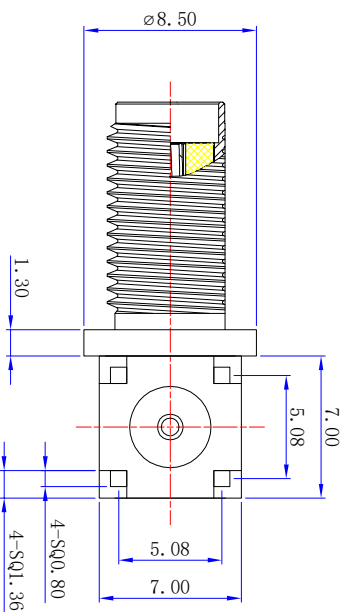

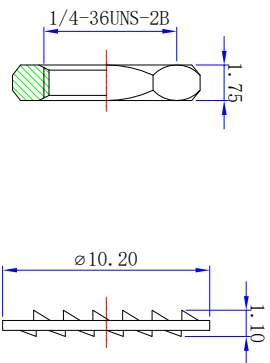
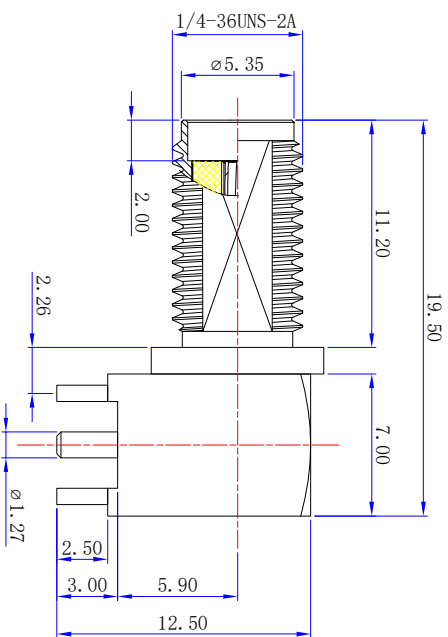


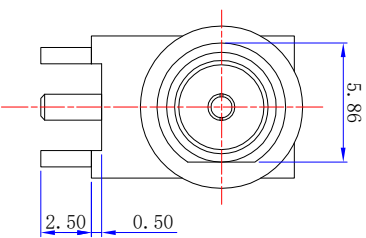


Product NO.		RHT-612-0282	
ISSUE	DESCRIPTION	DW/N	DATE
R1.0	First Issue	Mr. Wang	2017/03/06
R2.0	First Issue	Gavin	2021/03/11
		APPROVEN	JIM KING



Specifications:
 IMPEDANCE: 50 Ohms
 Frequency range: 0~6GHz
 VSWR: 1.5MAX
 Working voltage: 500V rms @ sea level
 Insulation resistance: 5000 MOhms min
 Temperature range: -65°C TO +165°C
 Relative temperature: ≤95% (40° C ± 2° C)

NO	DESCRIPTION	MATERIAL	FINISH	QTY
1	Body	Brass	Gold	1
2	Insulator	PTFE	NATURE	1
3	Center pin	Beryllium copper	Gold	1
4	Washer	Iron	Gold	1
5	Nut	Brass	Gold	1

-TOLERANCES-
UNLESS OTHERWISE SPECIFIED



RENHOTECH
www.renhotech.com

RENHOTECH GROUP

PART DESCRIPTION:
SMA R/A Bulkhead Jack PCB Mount

Appr: JIM KING

P/N: RHT-612-0282

Check:

Date Scale Unit Type Page

Draw: Gavin

2021.03.11 Free MM Z 1/1

UNLESS OTHERWISE SPECIFIED
TOLERANCES FOR MILLIMETERS ARE:
 0.5 - 8mm ± 0.25mm
 8 - 30mm ± 0.30mm
 30 - 120mm ± 0.30mm

1 2 3 4 5 6