




ELECTRICAL RATINGS

Impedance : 50 ohm
 Frequency Range : DC~12.4GHz
 Insulation Resistance : 5000MΩ min
 Contact Resistance : < 3mΩ
 Working Voltage : 335 VRMS max
 Dielectric Withstanding Voltage : 750V min

Product NO.	Renhotec-612-0284			
REV	DESCRIPTION	DWN	DATE	APPROVEN
A	First issue	Mr. Wang	2017/3/6	John kine

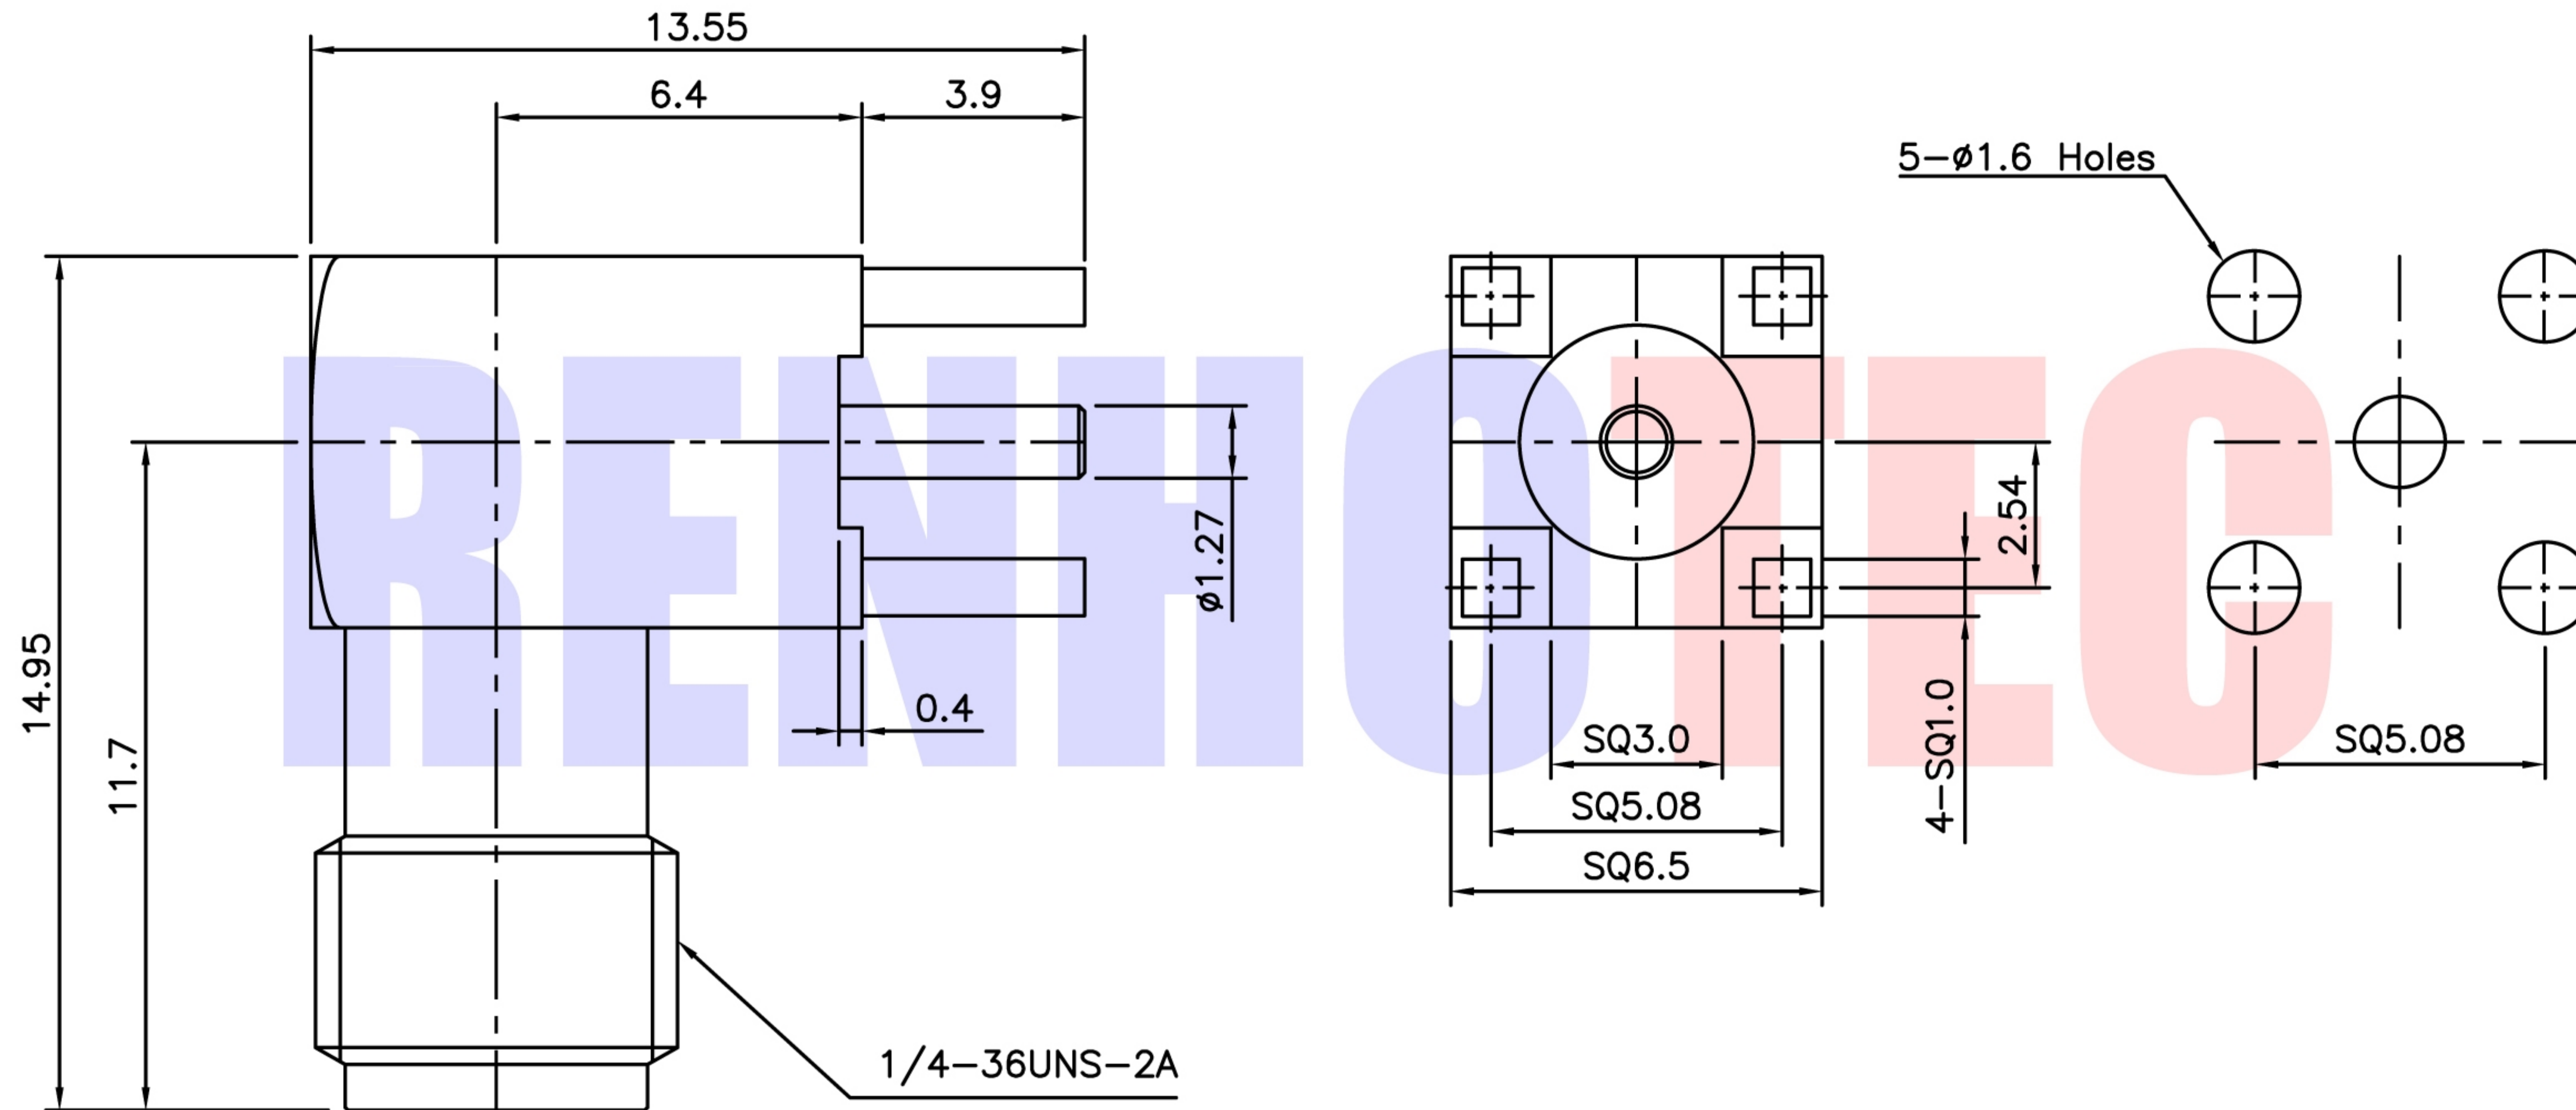

Connector parts	Materials	Finish
Body	Brass	Gold Plated
Center contact	BeCu/Brass	Gold Plated
Insulator	PTFE	

NOTE:		Tolerance	0-6	± 0.10
DRAWN Zelin. Zhang			6-30	± 0.20
2017/3/6		View	30-120	± 0.30
CHECKED			Angular	$\pm 2^\circ$
APPROVALS <i>John Kine</i>		UNIT	MM	
2017/3/6		SCALE	1:1	



RENHOTEC GROUP

Name: SMA R/A Jack PCB Mount

SIZE A	Product NO. RHT-612-0284	REV B
DateTime 2017/3/6	CAD FILE D/company drawings/BD	SHEET: 1 OF 1