






Product NO.	RHT-612-0404			
REV	DESCRIPTION	DWN	DATE	APPROVEN
A	First issue	Mr:chen	2017//13	John kine

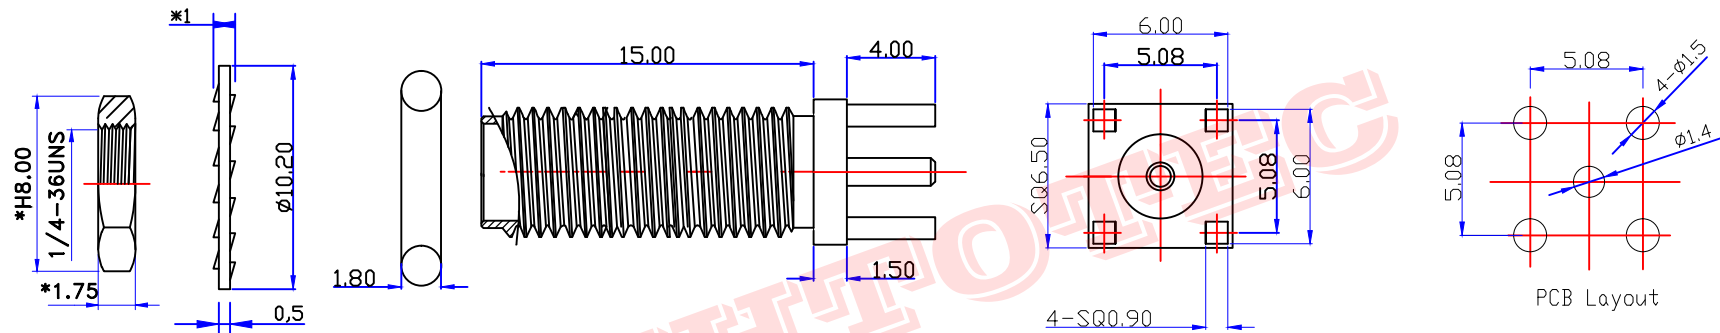

### Specifications:

IMPEDANCE: 50 Ohms  
 Frequency range: 0~6GHZ  
 VSWR: 1.5MAX  
 Working voltage: 500V rms @ sea level  
 Insulation resistance: 5000 Ohms min  
 Temperature range: -55°C TO +155°C  
 Relative temperature: ≤95% (40° C ± 2° C)

1	Shell	Brass	AU:1-3u"	NOTE:	Tolerance	0-6	±0.10	 <b>RENHOTEC GROUP</b> <a href="http://www.renhotec.com">www.renhotec.com</a>				
2	Body	Brass	AU:1-3u"			6-30	±0.20					
3	Insulator	TEFLON	None			30-120	±0.30					
4						Angular	±2°					
5				DRAWN	2017/02/	View		Name: SMA JACK FOR PCB				
6				Zelin.chen	13							
7				CHECKED								
8						UNIT	MM	SIZE A	Product NO. RHT-612-0404	REV a		
9												
10				APPROVALS	13/02.2017	SCALE	1:1	DateTime	2017/2/13	CAD FILE	D/company drawings/BD	SHEET: 1 OF 1
NO	Component Number	Material	Finish	John	Kine							