




ELECTRICAL DATA

Impedance: 50 ohm
 Frequency Range: DC~13.0GHz
 V.S.W.R: 1.25:1 max.
 Temperature Range: -65°C to +125°C
 PIM: (2x20W)-155dBc @ 800~900MHz Max

Product NO.	Renhotec-614-0144			
REV	DESCRIPTION	DWN	DATE	APPROVEN
A	First issue	Mr. Wang	2017/2/28	John kine

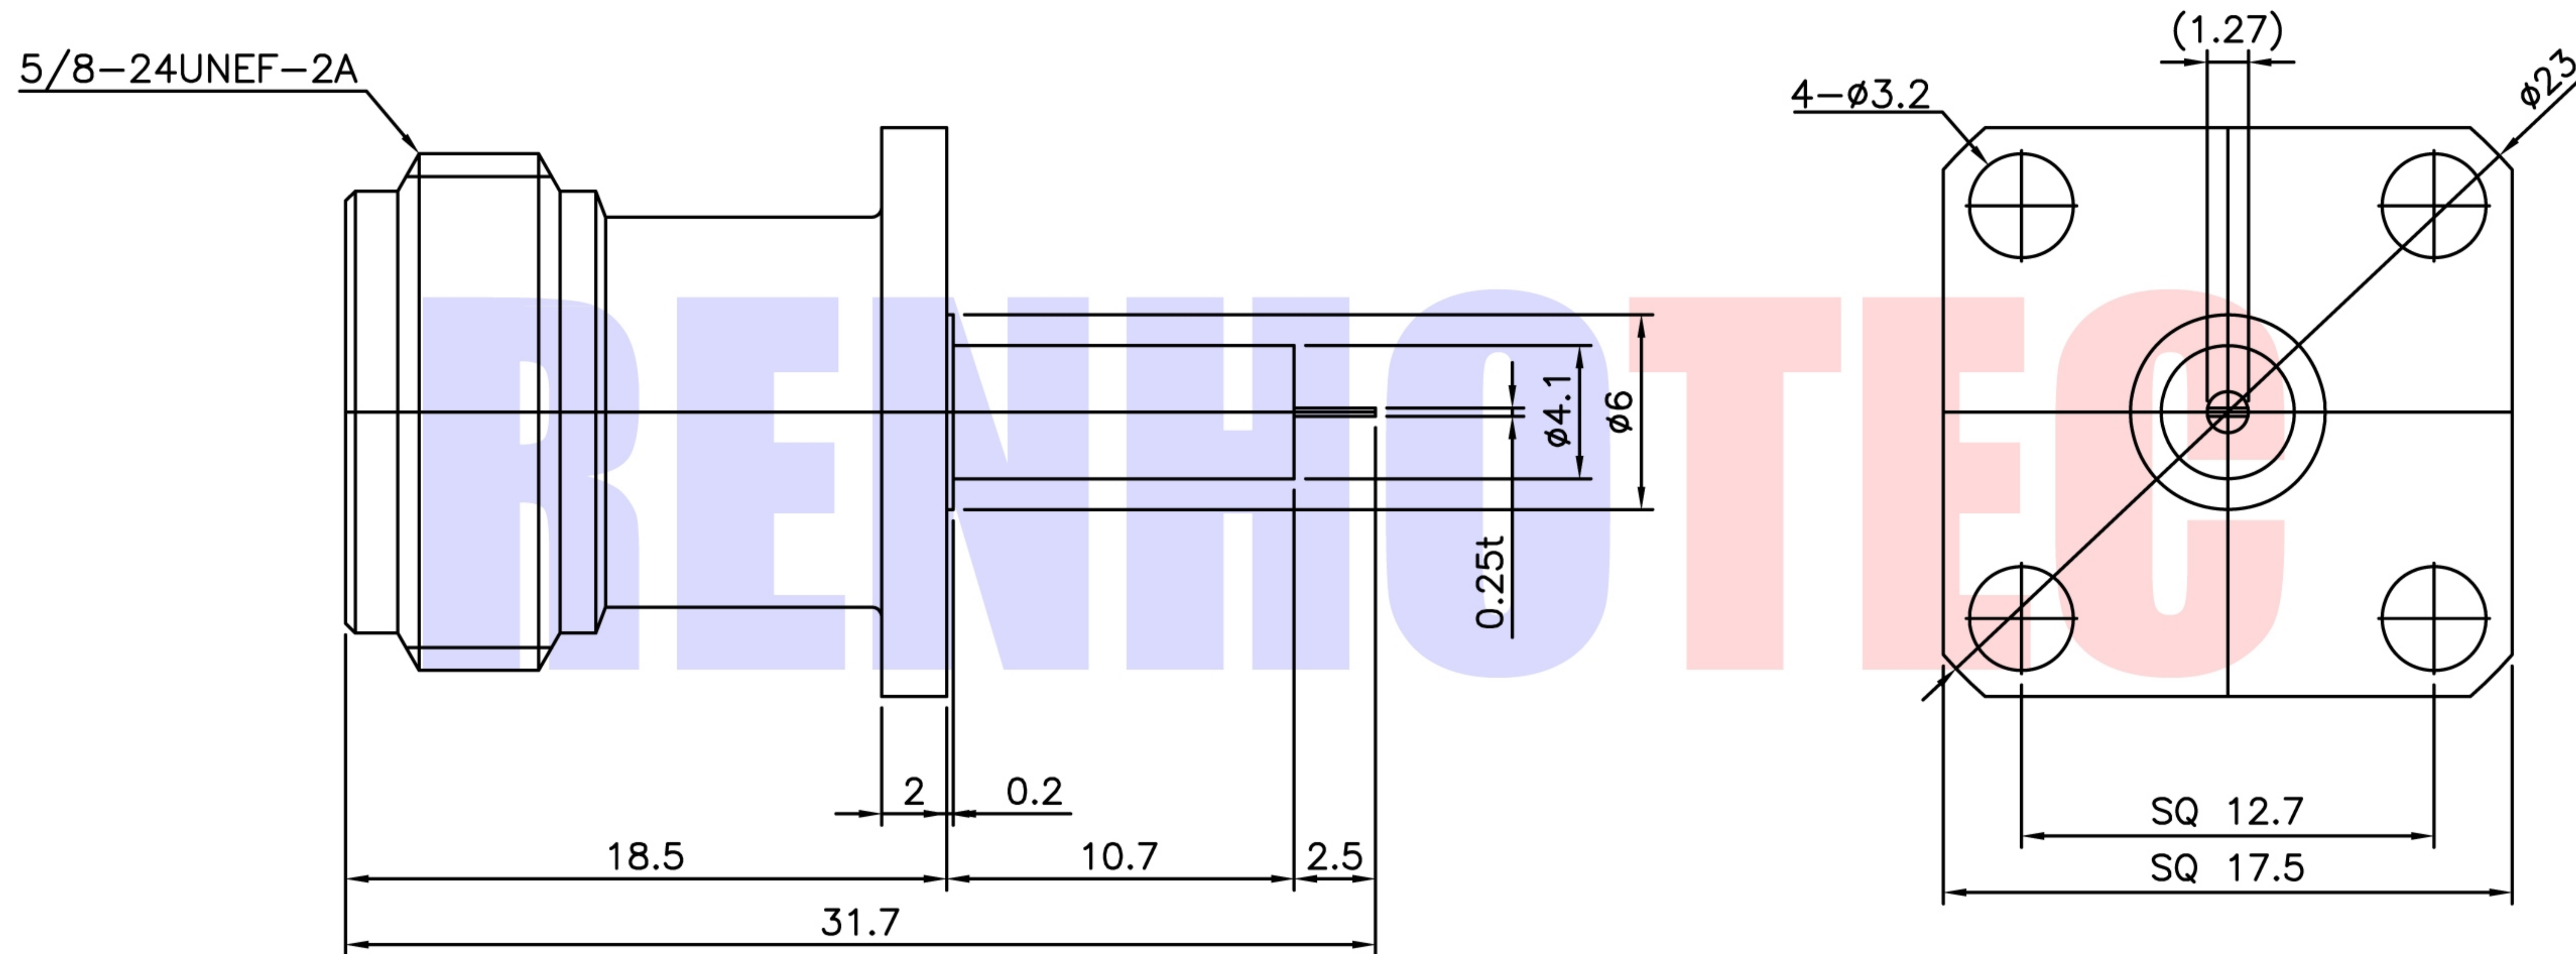

Item	Materials	Plating
Body	Brass	Silver Plated
Center contact	Be-Cu	Silver Plated
Insulator	PTFE	-

N-Type Panel 4Hole(SQ17.5) JACK
 Receptacle
 [LOW PIM]

NOTE:		Tolerance	0-6	±0.10
DRAWN Zelin. Zhang 2017/2/28			6-30	±0.20
CHECKED		View	30-120	±0.30
APPROVALS John Kine 2017/2/28			Angular	±2°
		UNIT	MM	
		SCALE	1:1	



RENHOTEC GROUP

Name: N Type Panel Receptacle Jack 4Holes SQ17.5			
SIZE A	Product NO. RHT-614-0144	REV B	
DateTime 2017/2/28	CAD FILE D/company drawings/BD	SHEET: 1 OF 1	