




Product NO.		RHT-612-0320			
REV	DESCRIPTION	DWN	DATE	APPROVEN	
A	First issue	SAM	2017/02/15	JIM.KING	

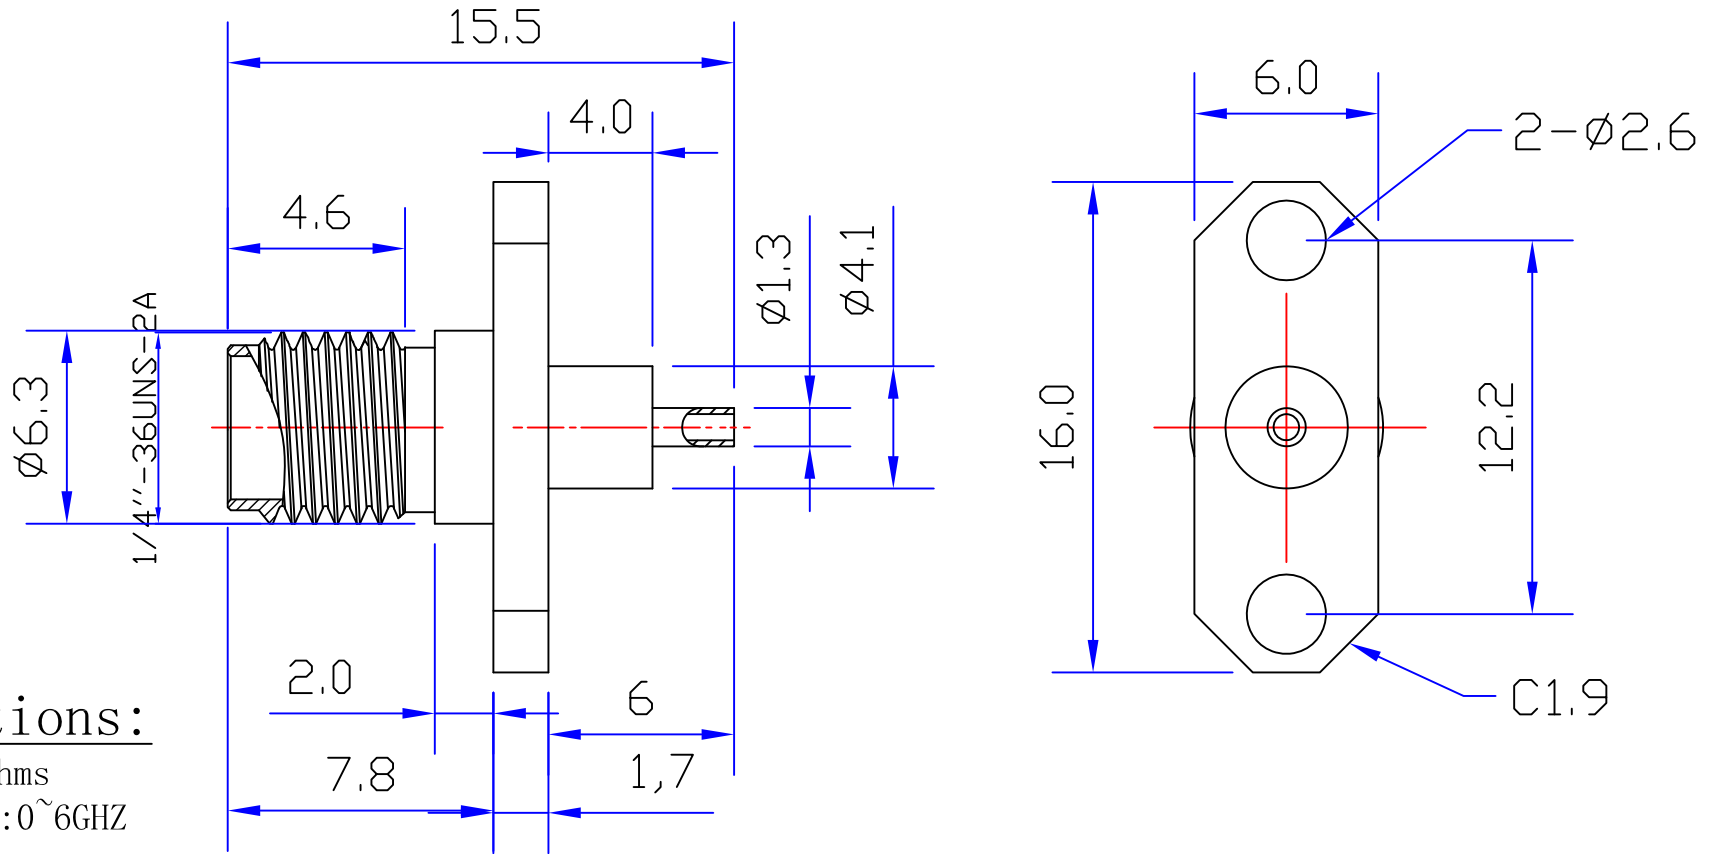

Specifications:

IMPEDANCE: 50 Ohms
 Frequency range: 0~6GHZ
 VSWR: 1.5MAX
 Working voltage: 500V rms @ sea level
 Insulation resistance: 5000 Ohms min
 Temperature range: -55°C TO +155°C
 Relative temperature: $\leq 95\%$ (40° C \pm 2° C)

1	Body	Stainless steel 303	
2	Insulator	TEFLON	White
3	Center contact	Phosphor	GOLD
NO	Component Number	Material	Finish

-TOLERANCES- UNLESS OTHERWISE SPECIFIED		RENHOTEC GROUP www.renhotec.com	
		Title: SMA JACK CONNECTOR	
0. ± 0.15	0° $\pm 30^\circ$	Appd:	P/N: RHT-612-0320
0.0 ± 0.10	0.0° $\pm 25^\circ$	Check: Xiong Tan	Date
0.00 ± 0.05	0.00° $\pm 20^\circ$	Draw: Owen	Scale
		2017.02.15	Unit
		Free	Type
		MM	Page
		Z	1/1