



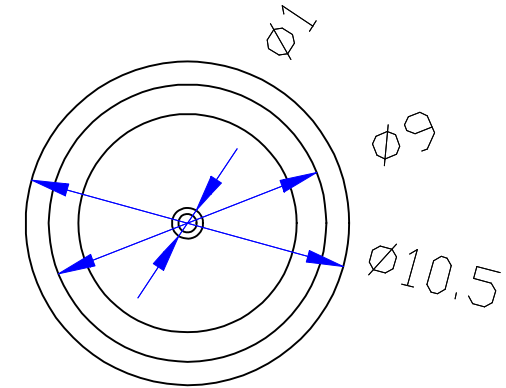

Product NO.	Renhotec-611-0018			
REV	DESCRIPTION	DWN	DATE	APPROVEN
A	First issue	Mr. chen	2016/3/16	John kine

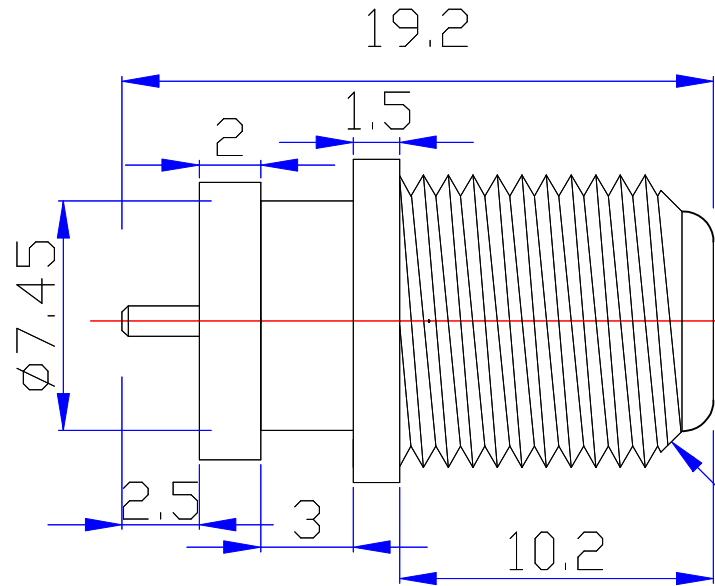

3/8-32UNEF-2A

SPECIFICATIONS:

Impedance: 75 Ohms
 Frequency Range: DC~3G
 VSWR: 30dB Return loss @ 1GHZ
 Working Voltage: 15 watts continuous
 Insulation Resistance: 5000 Ohms min
 Temperature Range: -40°C TO +60°C
 Drawings products are in line with ROHS standards

1	Body	Brass	NI:80-120u"
2	Insulator	PP	White
3	Center contact	Phosphor	Gold
4			
5			
6			
7			
8			
9			
10			
NO	Component Number	Material	Finish

NOTE:	
DRAWN	2016/03/16
Zelin. Zhang	
CHECKED	
APPROVALS	16/03.2016
John Kine	

Tolerance	0-6	±0.10
	6-30	±0.20
View	30-120	±0.30
	Angular	±2°
UNIT	MM	
SCALE	1:1	

Name: F Jack CONNECTOR			
SIZE	Product NO.	RENHOTEC-611-0018	REV
A			B
Date	Time	CAD FILE	SHEET: 1 OF 1
2016/3/16		D/company drawings/BD	