

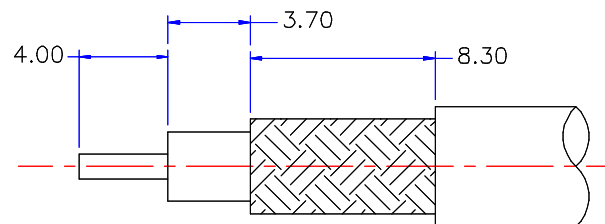
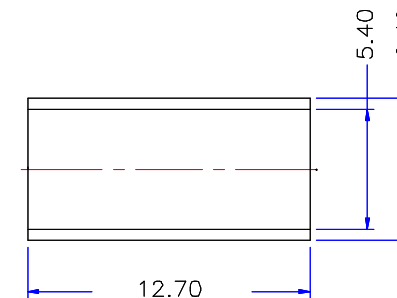


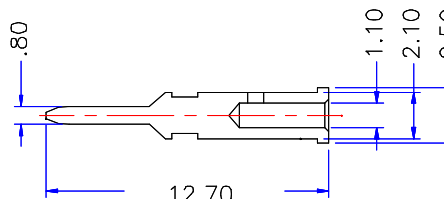

Product NO.	Renhotec-611-0036			
REV	DESCRIPTION	DWN	DATE	APPROVEN
A	First issue	Mr.chen	2016/3/17	John kine

3/8-32UNEF-2B

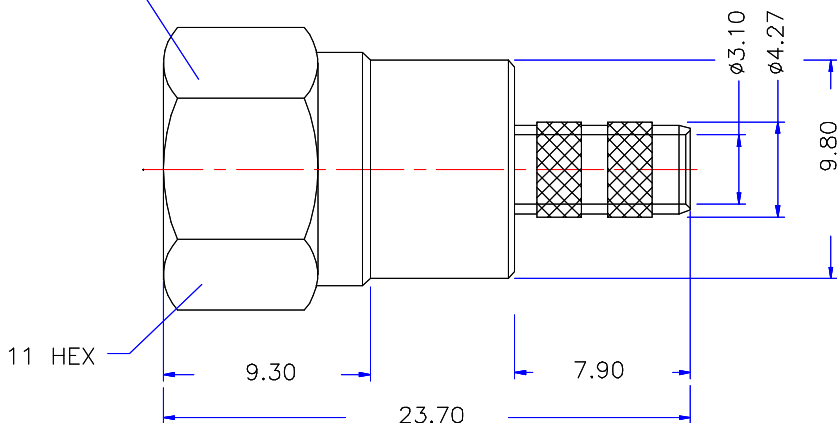

RECOMMENDED
CABLE STRIPPING DIM'S

SPECIFICATIONS:

Impedance: 75 Ohms

Frequency Range: DC~3G

VSWR: 30dB Return loss @ 1GHZ

Working Voltage: 15 watts continuous

Insulation Resistance: 5000 Ohms min

Temperature Range: -40°C TO +60°C

Drawings products are in line with ROHS standards

NOTE:


DRAWN
Zelin.Zhang
2016/03/17

APPROVALS
John Kine
17/03.2016

Tolerance

0-6 ±0.10
6-30 ±0.20
30-120 ±0.30
Angular ±2°

View



UNIT

MM

SCALE

1:1



RENHOTEC GROUP

Name: F plug (FOR RG58)

SIZE A	Product NO. RENHOTEC-611-0036	REV B
-----------	-------------------------------	----------

DateTime 2016/3/17	CAD FILE D/company drawings/BD	SHEET: 1 OF 1
-----------------------	-----------------------------------	---------------

DESCRIPTION	MATERIAL	FINISH	QTY
4 FERRULE	COPPER	NICKEL	1
3 CONTACT PIN	BRASS	GOLD	1
2 INSULATOR	TEFLON	NATURAL	1
1 BODY	BRASS	NICKEL	1