



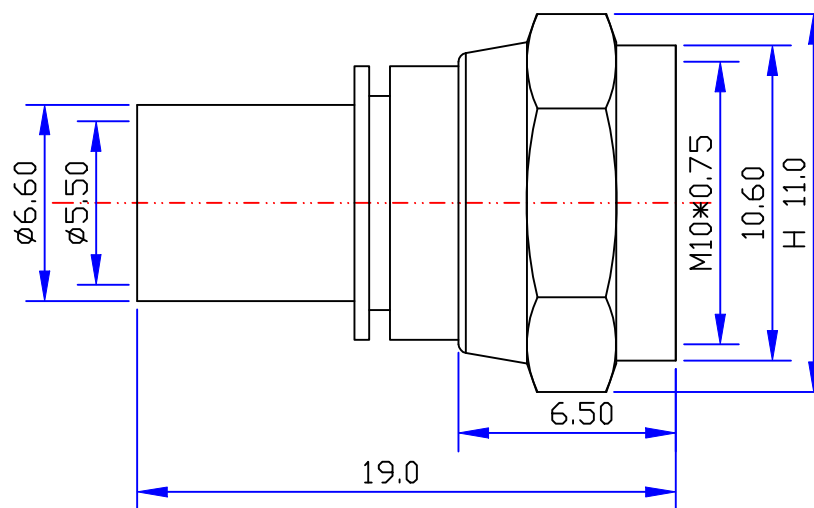

Product NO.	Renhotec-611-0038			
REV	DESCRIPTION	DWN	DATE	APPROVEN
A	First issue	Mr. chen	2016/3/18	John kine

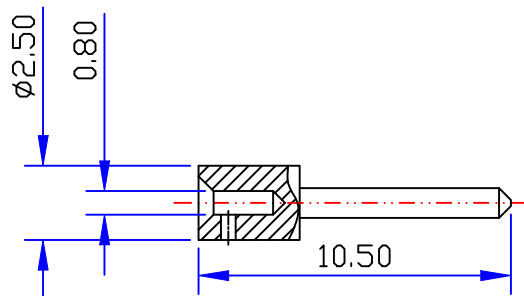

**SPECIFICATIONS:**

Impedance: 75 Ohms

Frequency Range:DC~3G

VSWR:30DdB Return loss @ 1GHZ

Working Voltage:15 watts continuous

Insulation Resistance:5000 Ohms min


Temperature Range:-40°C TO +60°C

Drawings products are in line with ROHS standards

1	Shell	Brass	NI:80-120u"
2	Body	Brass	NI:80-120u"
3	Contact pin	Brass	NI:80-120u"
4	Insulation	Pom	None
5			
6			
7			
8			
9			
10			
NO	Component Number	Material	Finish

NOTE:	
DRAWN	2016/03/18
Zelin.Zhang	
CHECKED	
APPROVALS	19/03.2016
John Kine	

Tolerance	0-6	±0.10
	6-30	±0.20
View	30-120	±0.30
	Angular	±2°
UNIT	MM	
SCALE	1:1	



www.renhotec.com

# RENHOTEC GROUP

Name: F Plug Stright For RG/59

SIZE	Product NO. RENHOTEC-611-0038	REV
A		B
DateTime	CAD FILE	SHEET: 1 OF 1
2016/3/18	D/company drawings/BD	