




Product NO.	Renhotec-611-0044			
REV	DESCRIPTION	DWN	DATE	APPROVEN
A	First issue	Mr. chen	2016/3/20	John kine

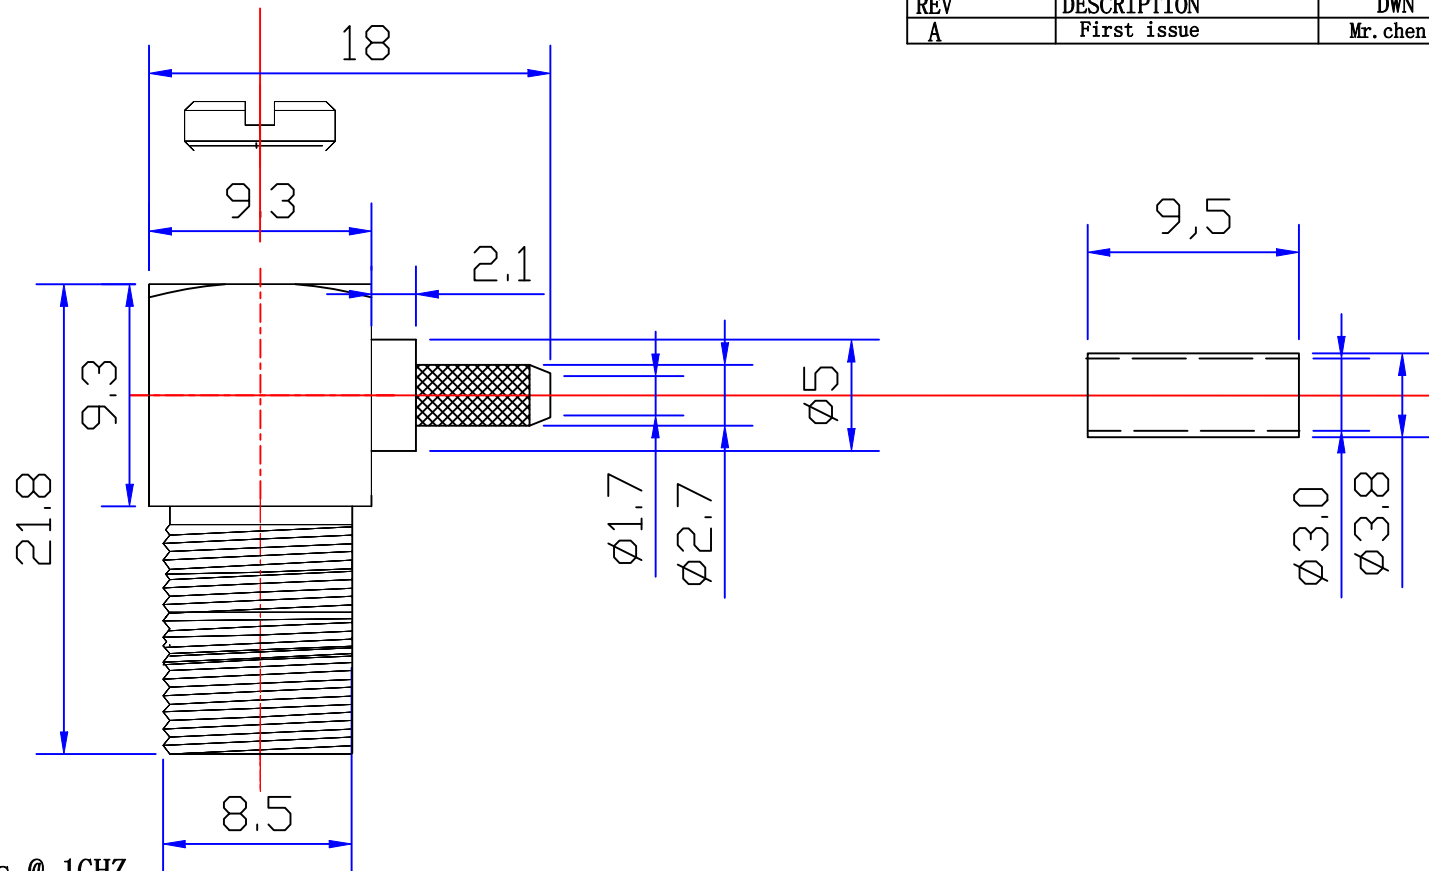

SPECIFICATIONS:

Impedance: 75 Ohms
 Frequency Range: DC~3G
 VSWR: 30dB Return loss @ 1GHZ
 Working Voltage: 15 watts continuous
 Insulation Resistance: 5000 Ohms min
 Temperature Range: -40°C TO +60°C
 Drawings products are in line with ROHS standards

NOTE:

DRAWN	2016/03/20
Zelin. Zhang	
CHECKED	
APPROVALS	
John Kine	29.03.2016

Tolerance	0-6	±0.10
	6-30	±0.20
View	30-120	±0.30
	Angular	±2°
UNIT	MM	
SCALE	1:1	



RENHOTEC GROUP

Name: F R/A JACK (FOR RG174)		REV
SIZE A	Product NO. RENHOTEC-611-0044	B
DateTime	CAD FILE	SHEET: 1 OF 1
2016/3/20	D/company drawings/BD	

8				
7				
6				
5				
4	FERRULE	BRASS	NEXCOTE	1
3	CONTACT PIN	PHOS. BRONZE	GOLD	1
2	INSULATOR	P O M	NATURAL	1
1	BODY	BRASS	NEXCOTE	1
	DESCRIPTION	MATERIAL	FINISH	QTY