




SPECIFICATION

Impedance : 75 ohm
 Insulation Resistance : min. 1000megohms
 Working Voltage : 250V
 Durability : 500 cycles min
 Contact Resistance Inner Conductor : < 1.0mΩ

Product NO.	Renhotec-626-0202			
REV	DESCRIPTION	DWN	DATE	APPROVEN
A	First issue	Mr. Wang	2017/3/6	John kine

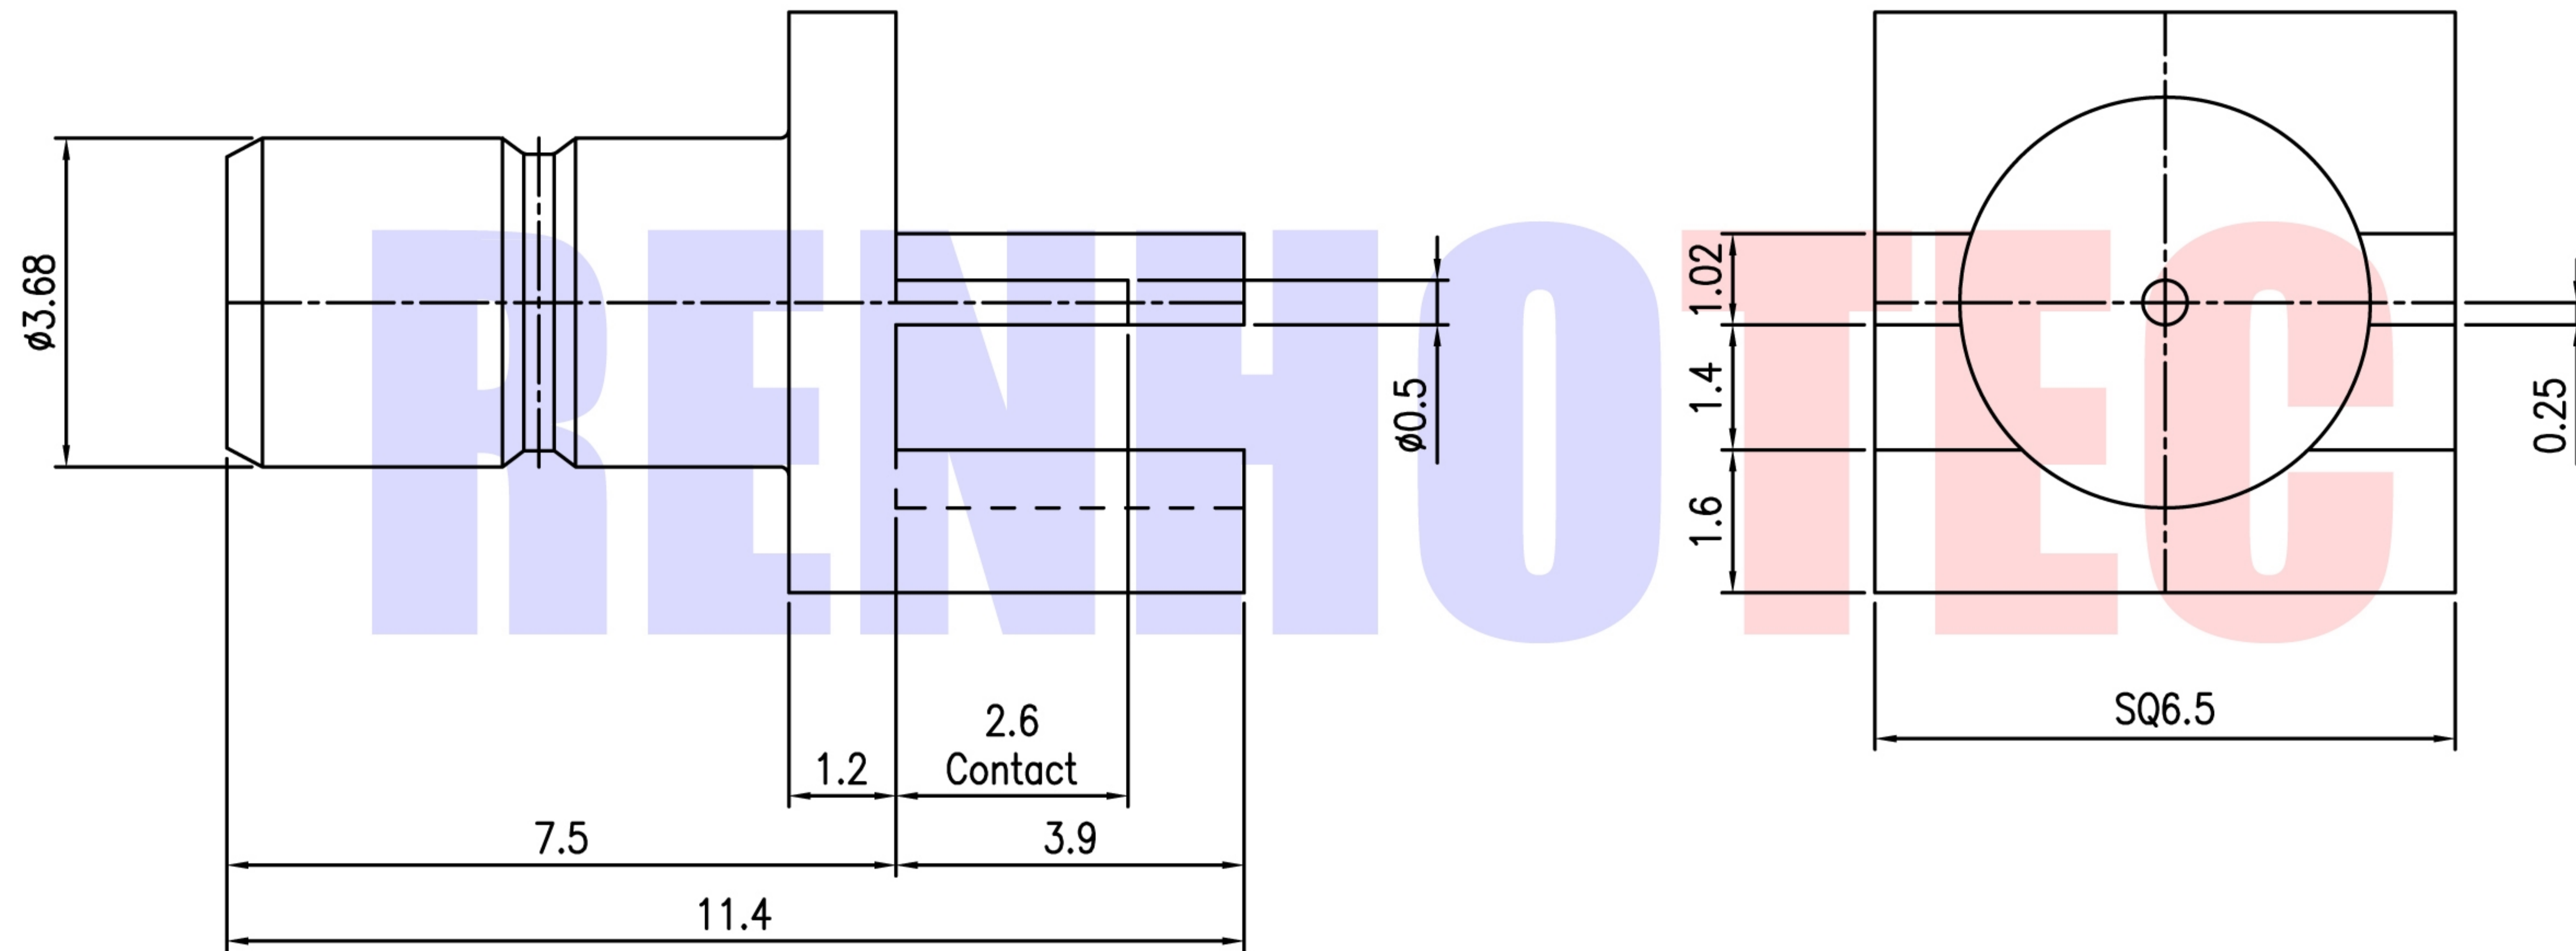

Item	Materials	Plating
Body	Brass	Gold Plated
Center contact	Brass	Gold Plated
Insulator	PTFE	

SMB End Launch JACK Receptacle-75 OHm
 -Round Contact(1.30mm PCB)

NOTE:		Tolerance	0-6	± 0.10
DRAWN Zelin. Zhang			6-30	± 0.20
2017/3/6		View	30-120	± 0.30
CHECKED			Angular	$\pm 2^\circ$
APPROVALS <i>John Kine</i>		UNIT	MM	
2017/3/6		SCALE	1:1	



RENHOTEC GROUP

Name: Edge Mount SMB Jack

SIZE A	Product NO. RHT-626-0202	REV B
DateTime 2017/3/6	CAD FILE D/company drawings/BD	SHEET: 1 OF 1