




**SPECIFICATION**

Impedance : 75 ohm  
 Insulation Resistance : min. 1000megohms  
 Working Voltage : 250V  
 Durability : 500 cycles min  
 Contact Resistance Inner Conductor : < 1.0mΩ

Product NO.	Renhotec-626-0203			
REV	DESCRIPTION	DWN	DATE	APPROVEN
A	First issue	Mr. Wang	2017/3/6	John kine

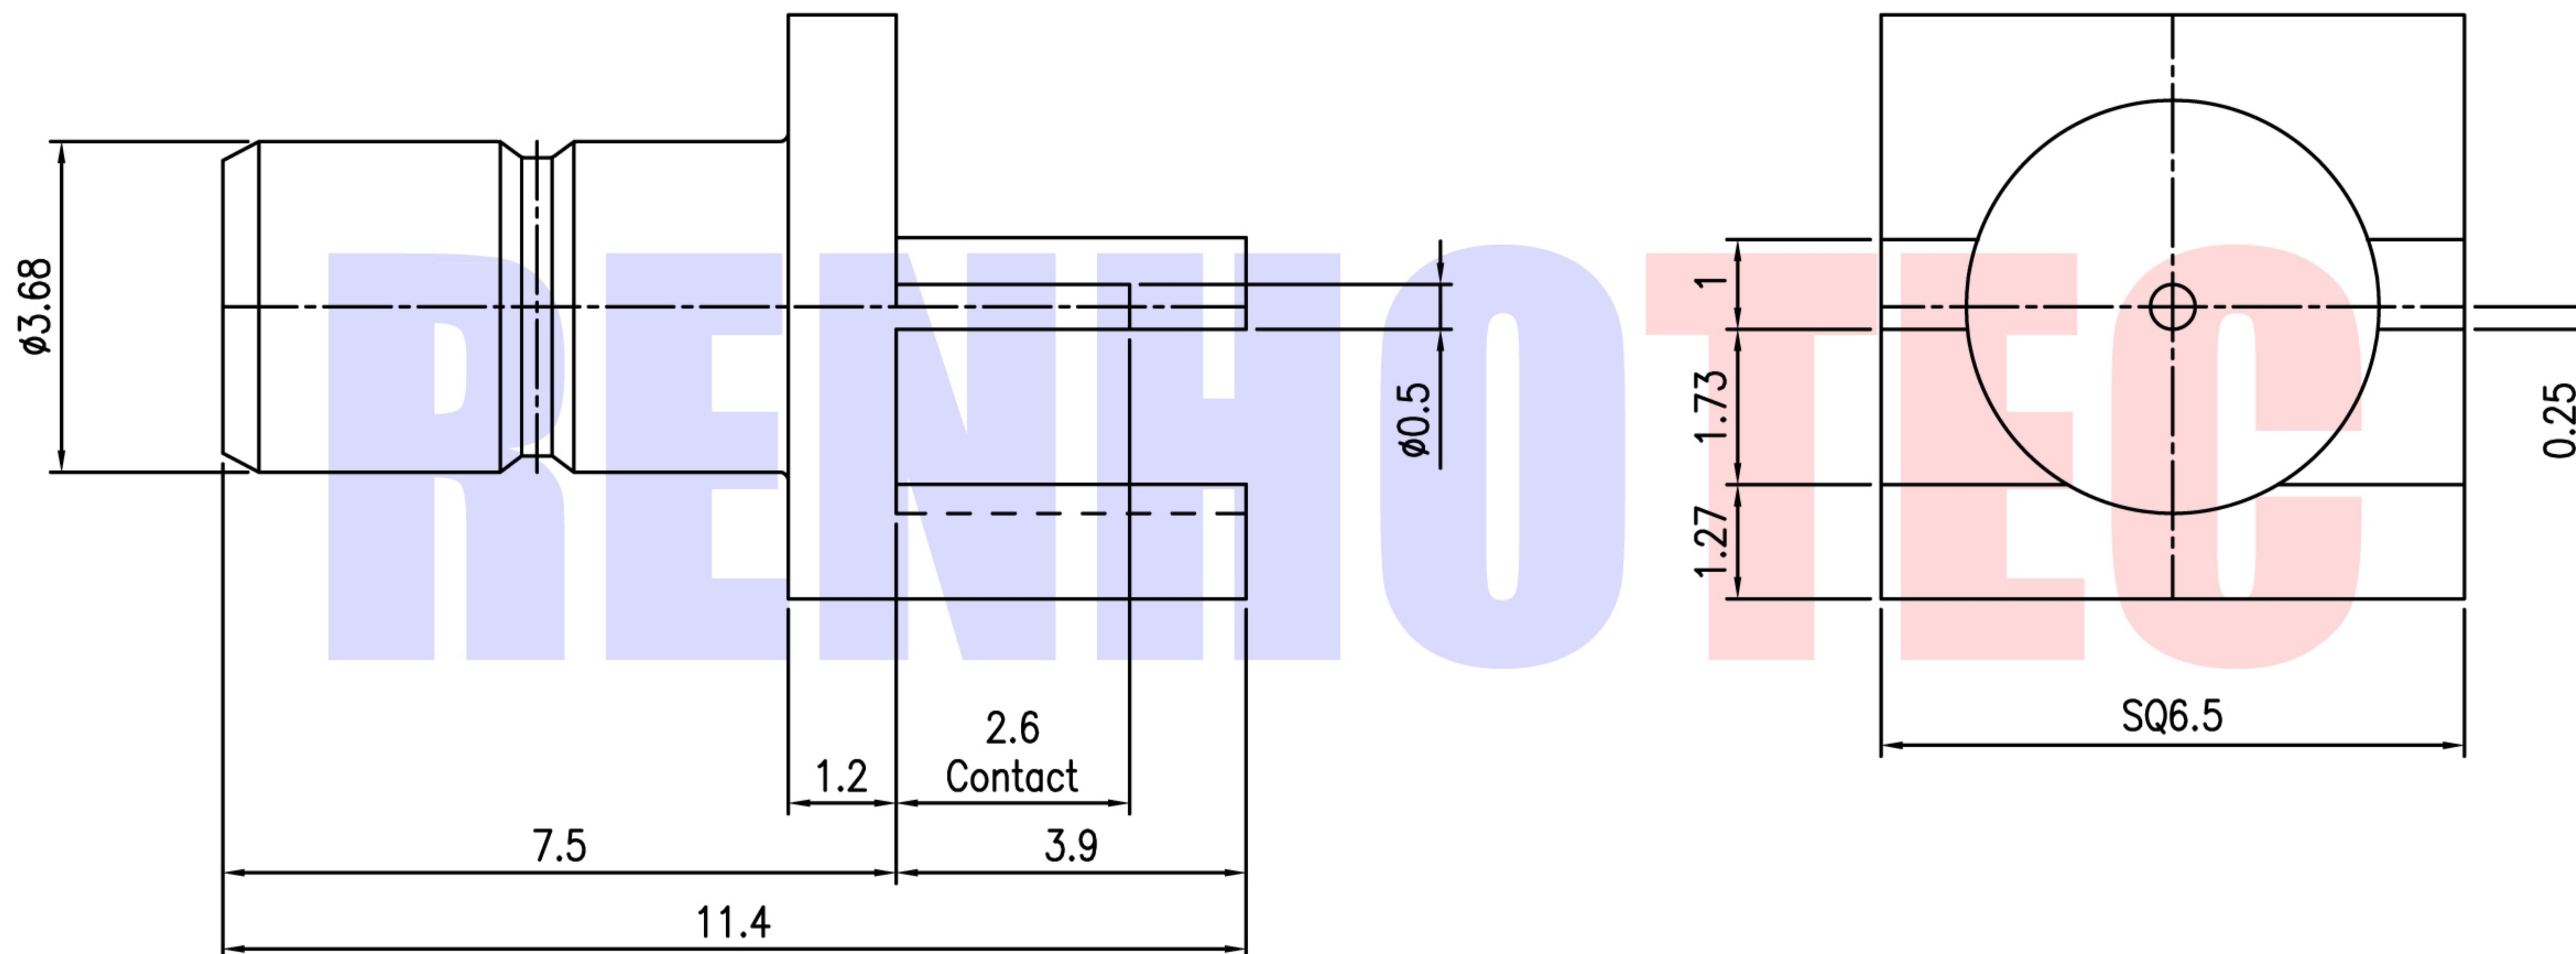

Item	Materials	Plating
Body	Brass	Gold Plated
Center contact	Brass	Gold Plated
Insulator	PTFE	-

SMB End Launch JACK Receptacle-75 OHm  
 -Round Contact(1.60mm PCB)

NOTE:		Tolerance	0-6	$\pm 0.10$
DRAWN Zelin. Zhang 2017/3/6			6-30	$\pm 0.20$
CHECKED		View	30-120	$\pm 0.30$
APPROVALS John Kine 2017/3/6			Angular	$\pm 2^\circ$
		UNIT	MM	
		SCALE	1:1	



**RENHOTEC GROUP**

Name: Edge Mount SMB Jack

SIZE A	Product NO. RHT-626-0203	REV B
DateTime 2017/3/6	CAD FILE D/company drawings/BD	SHEET: 1 OF 1