




SPECIFICATIONS

Impedance ; 50ohm
 Frequency range ; DC~6GHz
 V.S.W.R : 1.2:1max @6GHz
 Working voltage : 170 VRMS
 Temperature range : -55°C to +155°C

Product NO.	Renhotec-631-0118			
REV	DESCRIPTION	DWN	DATE	APPROVEN
A	First issue	Mr. Wang	2017/2/27	John kine

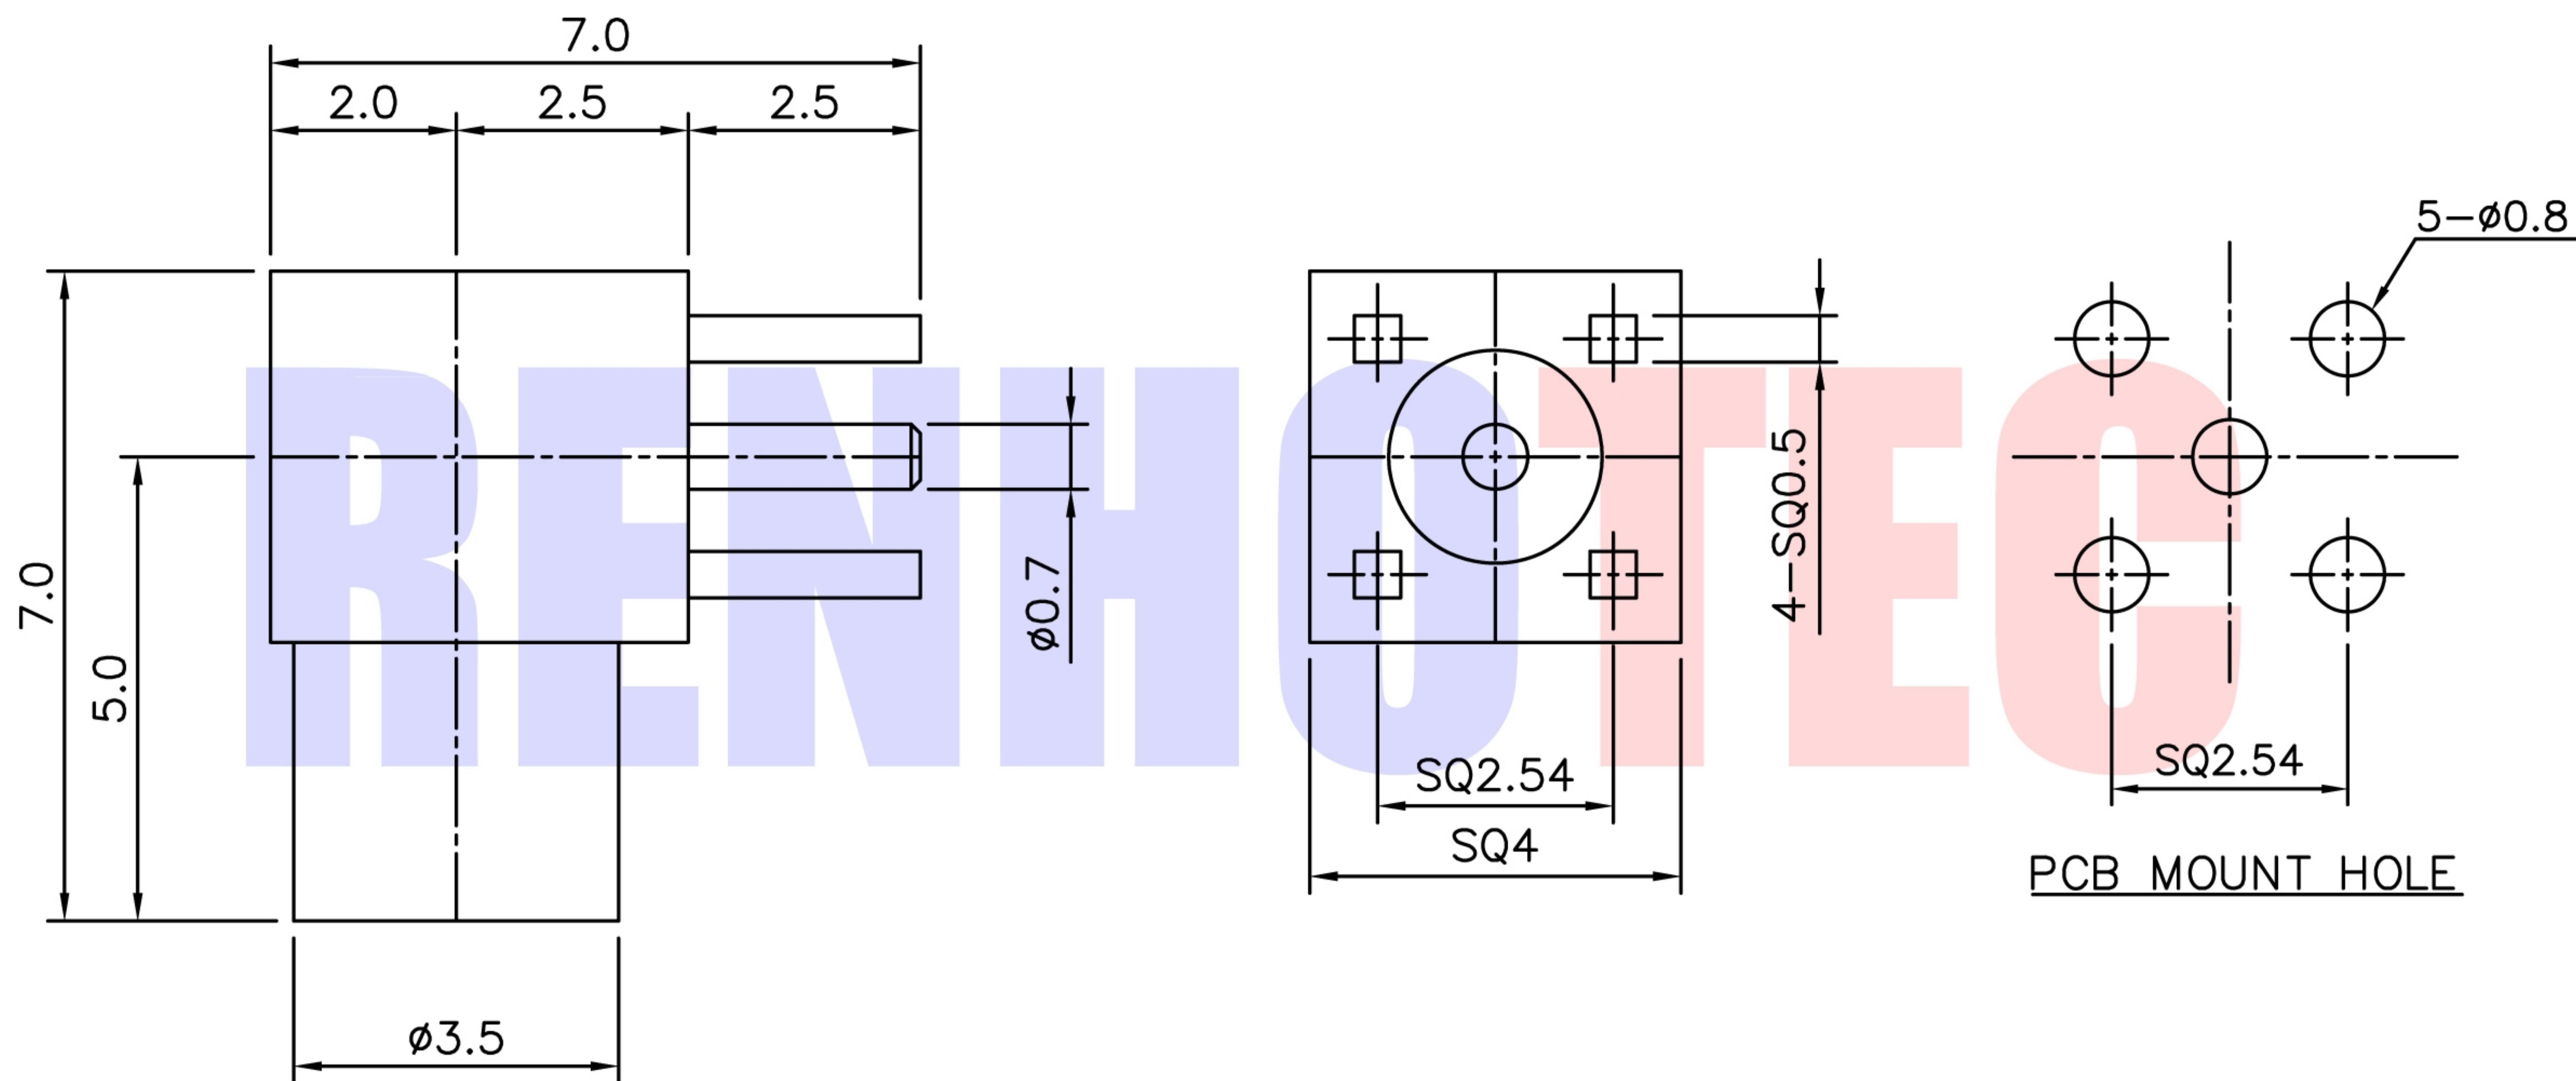

Connector parts	Materials	Finish
Body	Brass	Gold Plated
Center contact	Beryllium copper	Gold Plated
	Brass	Gold Plated
Insulator	TEFLON	-

NOTE:		Tolerance	0-6	± 0.10
DRAWN Zelin. Zhang 2017/2/27			6-30	± 0.20
CHECKED		View	30-120	± 0.30
APPROVALS John Kine 2017/2/27			Angular	$\pm 2^\circ$
		UNIT	MM	
		SCALE	1:1	



RENHOTECH GROUP

Name: MMCX R/A Jack PCB Mount			
SIZE A	Product NO. RHT-631-0118	REV B	
DateTime 2017/2/27	CAD FILE D/company drawings/BD	SHEET: 1 OF 1	