




Product NO.		RHT-699-3001		
REV	DESCRIPTION	DWN	DATE	APPROVEN
R1.0	First issue	LIJUN	2023.10.20	JIM.KING

NOMINAL IMPEDANCE 50Ω
 FREQUENCY RANGE 0-26.56 GHz
 TEMPERATURE RATING -65/+200°C
 V.S.W.R +X F(GHz)Maxi
 RF INSERTION LOSS F(GHz) dB Maxi
 VOLTAGE RATING 335 Veff Maxi
 DIELECTRIC WITHSTANDING VOLTAGE
 1000Veff Mini
 INSULATION RESISTANCE NA MnMini
 HERMETIC SEAL 1*10⁻⁸Atm.cm³/s
 LEAKAGE (pressurized only)
 MECHANICAL DURABILITY Cycles
 WEIGHT gr
 SPECIFICATION

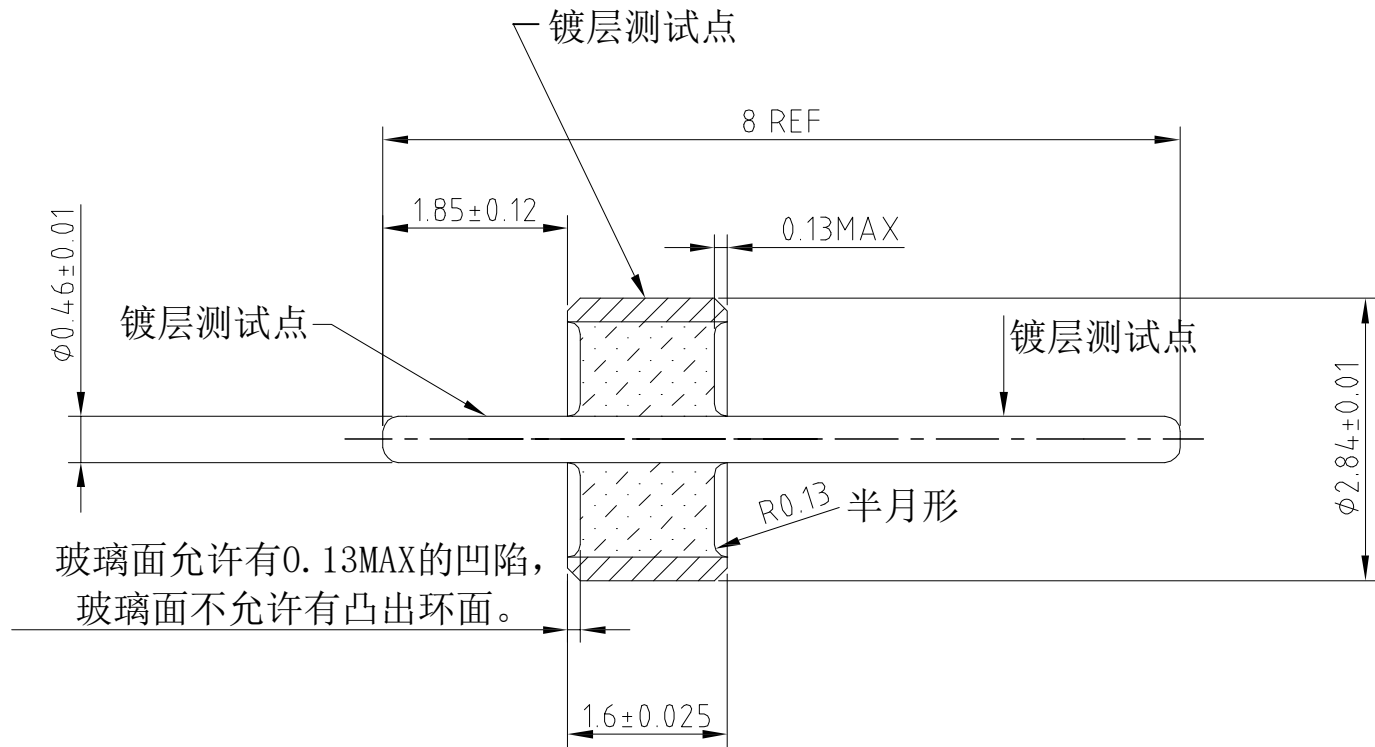

CABLES:
 OTHERS CHARACTERISTICS
 CABLE RETENTION NA N Mini
 CENTER CONTACT RETENTION
 Axial force-mating end 30N Mini
 Axial force-opposite end 30N Mini
 Torque cm.N Mini
 RECOMMENDED TORQUES
 Mating cm.N
 Panel nut NA cm.N
 Clamp nut NA cm.N

-TOLERANCES- UNLESS OTHERWISE SPECIFIED					
	PART DESCRIPTION: GAS SEAL				
UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 - 8mm ± 0.10mm 8 - 30mm ± 0.15mm 30 - 120mm ± 0.20mm	Appd: JIM.KING	P/N: RHT-699-3001			
	Check:	Date	Scale	Unit	Type
	Draw: LIJUN	2023.10.20	Free	MM	Z
				Page	1/1