




Product NO.		RHT-631-0004		
REV	DESCRIPTION	DWN	DATE	APPROVEN
A	First issue	Mr. CHEN	2016/2/23	John kine
B				

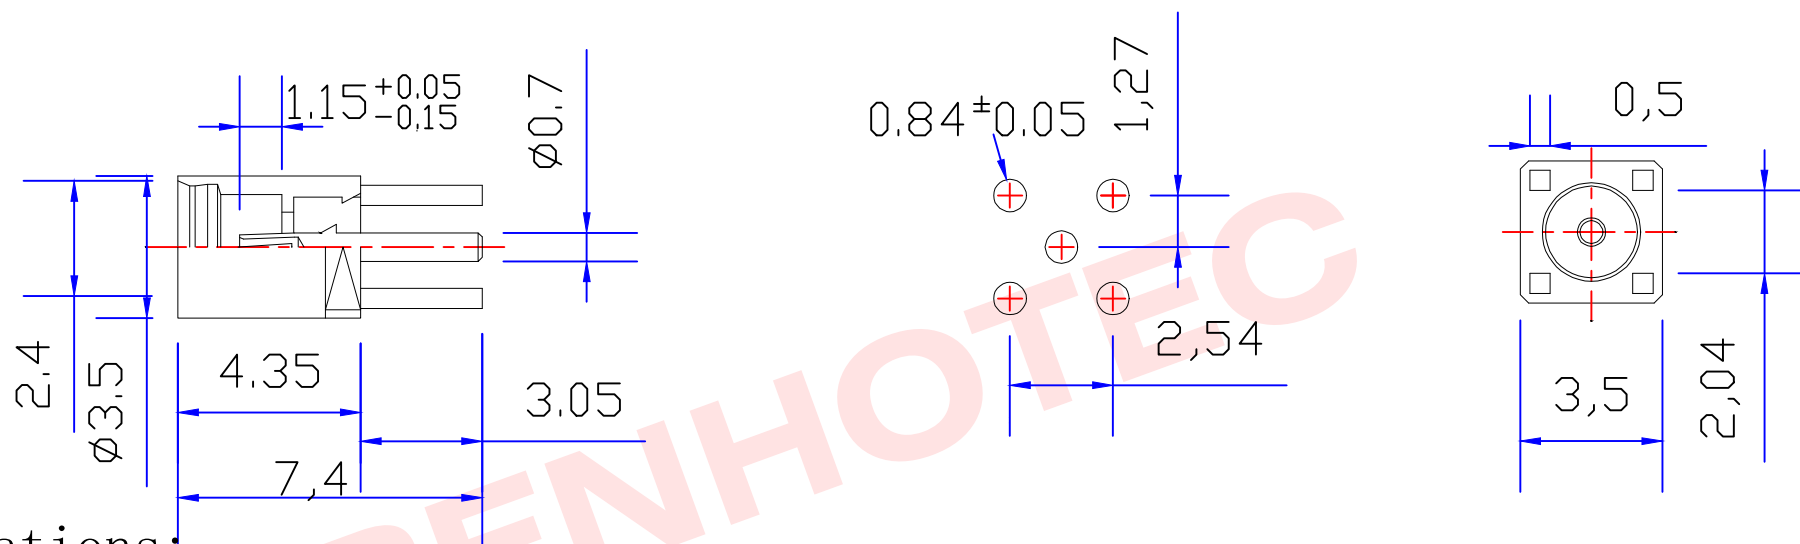

Specifications:

IMPEDANCE: 50 Ohms

Frequency range: 0~6GHz


VSWR: 1.5MAX

Working voltage: 500V rms @ sea level

Insulation resistance: 5000 Ohms min

Temperature range: -55°C TO +155°C

Relative temperature: ≤95% (40°C ±2°C)

				NOTE:		Tolerance	X.	±0.15		RENHOTECH GROUP							
8							X. X	±0.10									
7							X. XX	±0.05									
6							Angular	±5°									
5				DRAWN	Zelin. Zhang	View			Name: MMCX STRAIGHT THROUGH HOLE JACK-50 OHM								
4				CHECKED													
3																	
2				CONTACT PIN	BER. COPPER	GOLD	1	INSULATOR	TEFLON	NATURAL	1	UNIT	MM	SIZE A	Product NO.	RHT-631-0004	REV A
1				BODY	BRASS	GOLD	1										
				DESCRIPTION	MATERIAL	FINISH	QTY	APPROVALS	John	SCALE	1:1	Date	Time	CAD FILE	SHEET: 1 OF 1		
																</	