
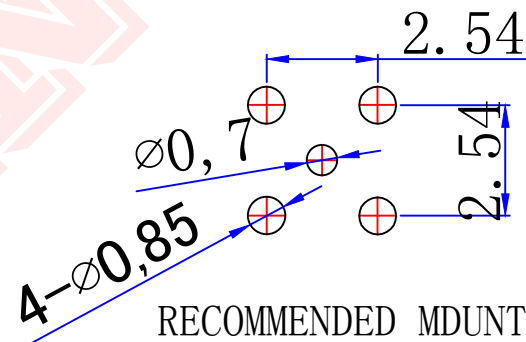
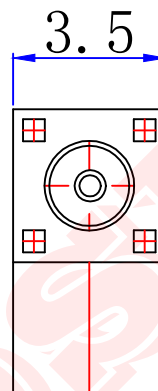




RECOMMENDED MOUNTING
HOLE DIMENSIONS SCALE
10.000

MICROMATE <MMCX> JACK INTERFACE

IMPEDANCE: 50 Ohms
Frequency range:0~6GHZ
VSWR:1.5MAX
Working voltage:500V rms @ sea level
Insulation resistance:5000 Ohms min
Temperature range:-65℃ TO +165℃
Relative temperature:<=95%(40℃±2℃)
Durability<mating>:500<cycles>

1	Body	BRASS	GOLD	NOTE:		Tolerance	X.	±0.15		Dosin Industrial (HK) Co. Ltd 东莞市德索五金电子制品有限公司 Dosin Hardware Electronics Co., Ltd		E-mail: dosin2005@163.com	
2	INSULATOR	TEFLON	WHITE				X. X	±0.10				dosin2005@dosin-china.com	
3	CENTR CONTACT	BRASS	GOLD				X. XX	±0.05				Web: http://www.dosinconn.com	
4							Angular	±5°				TEL: (0086) 769-81153906 FAX: (0086) 769-81875836	
5				DRAWN	2018/03/16	View			Name: MMCX JACK CONNECTOR				
6				Zelin. CHEN									
7				CHECKED									
8													
9					UNIT	MM	SIZE	Product NO. DOSIN-809-0014			REV		
10				APPROVALS	16/03.2018	SCALE	1:1	Date	CAD FILE		SHEET: 1 OF 1		
NO	Component Number	Material	Finish	John Kine				2018/08/02	H/company drawings/BD				
A		B		C		D		E		F		G	