





Electrical Data

Impedance : 50Ω
Frequency range : DC~6 GHz
Contact current : DC 1.5A MAX.
Working voltage : 335V RMS
V.S.W.R : ≤1.20
Temperature range : -65°C~+125°C

Product NO. DOSIN-809-1028				
REV	DESCRIPTION	DWN	DATE	APPROVEN
A	First issue	JIM	2017. 3. 9	John kine

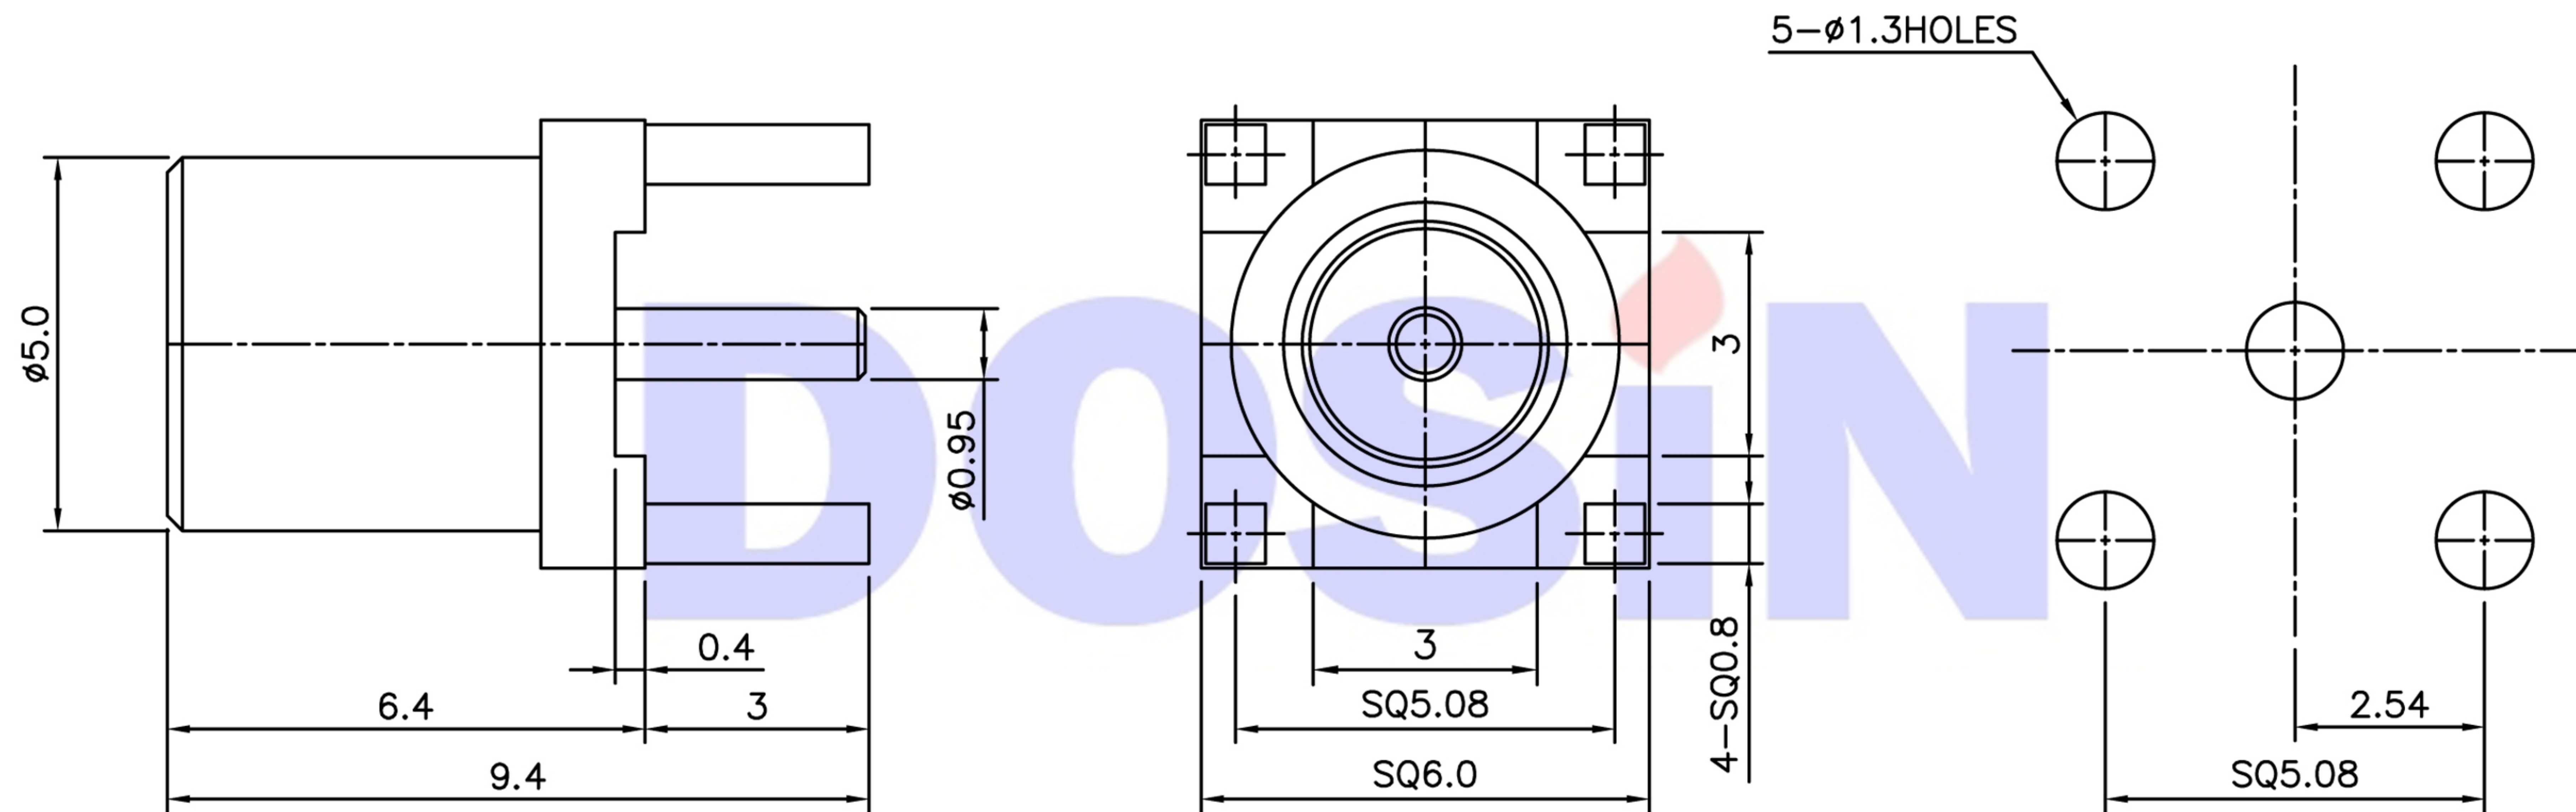

Item	Materials	Plating
Body	Brass	Gold Plated
Center contact	Be-Cu	Gold Plated
Insulator	PTFE	-

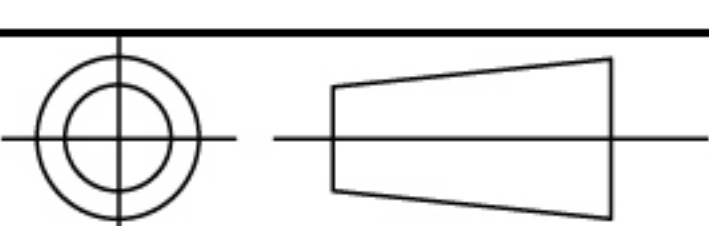NOTE:		Tolerance	0-6 ±0.05 6-30 ±0.10 30-120 ±0.20 Angular ±2°	 Dosin Industrial(H.K)Co.Ltd 东莞市德索五金电子制品有限公司 Dosin Hardware Electronics Co.,Ltd		E-mail:dosin2005@163.com dosin2005@dosin-china.com Web:http://www.dosinconn.com TEL:(0086)769-81153906 FAX:(0086)769-81875836	
DRAWN Zelin. Zhang	2017. 3. 9						
CHECKED		View		Name: MCX Straight Jack PCB			
APPROVALS John		UNIT	MM	SIZE A	Product NO. DOSIN-809-1028		REV B
		SCALE	1:1	DateTime 2017. 3. 9		CAD FILE D/company drawings/BD	SHEET: 1 OF 1