


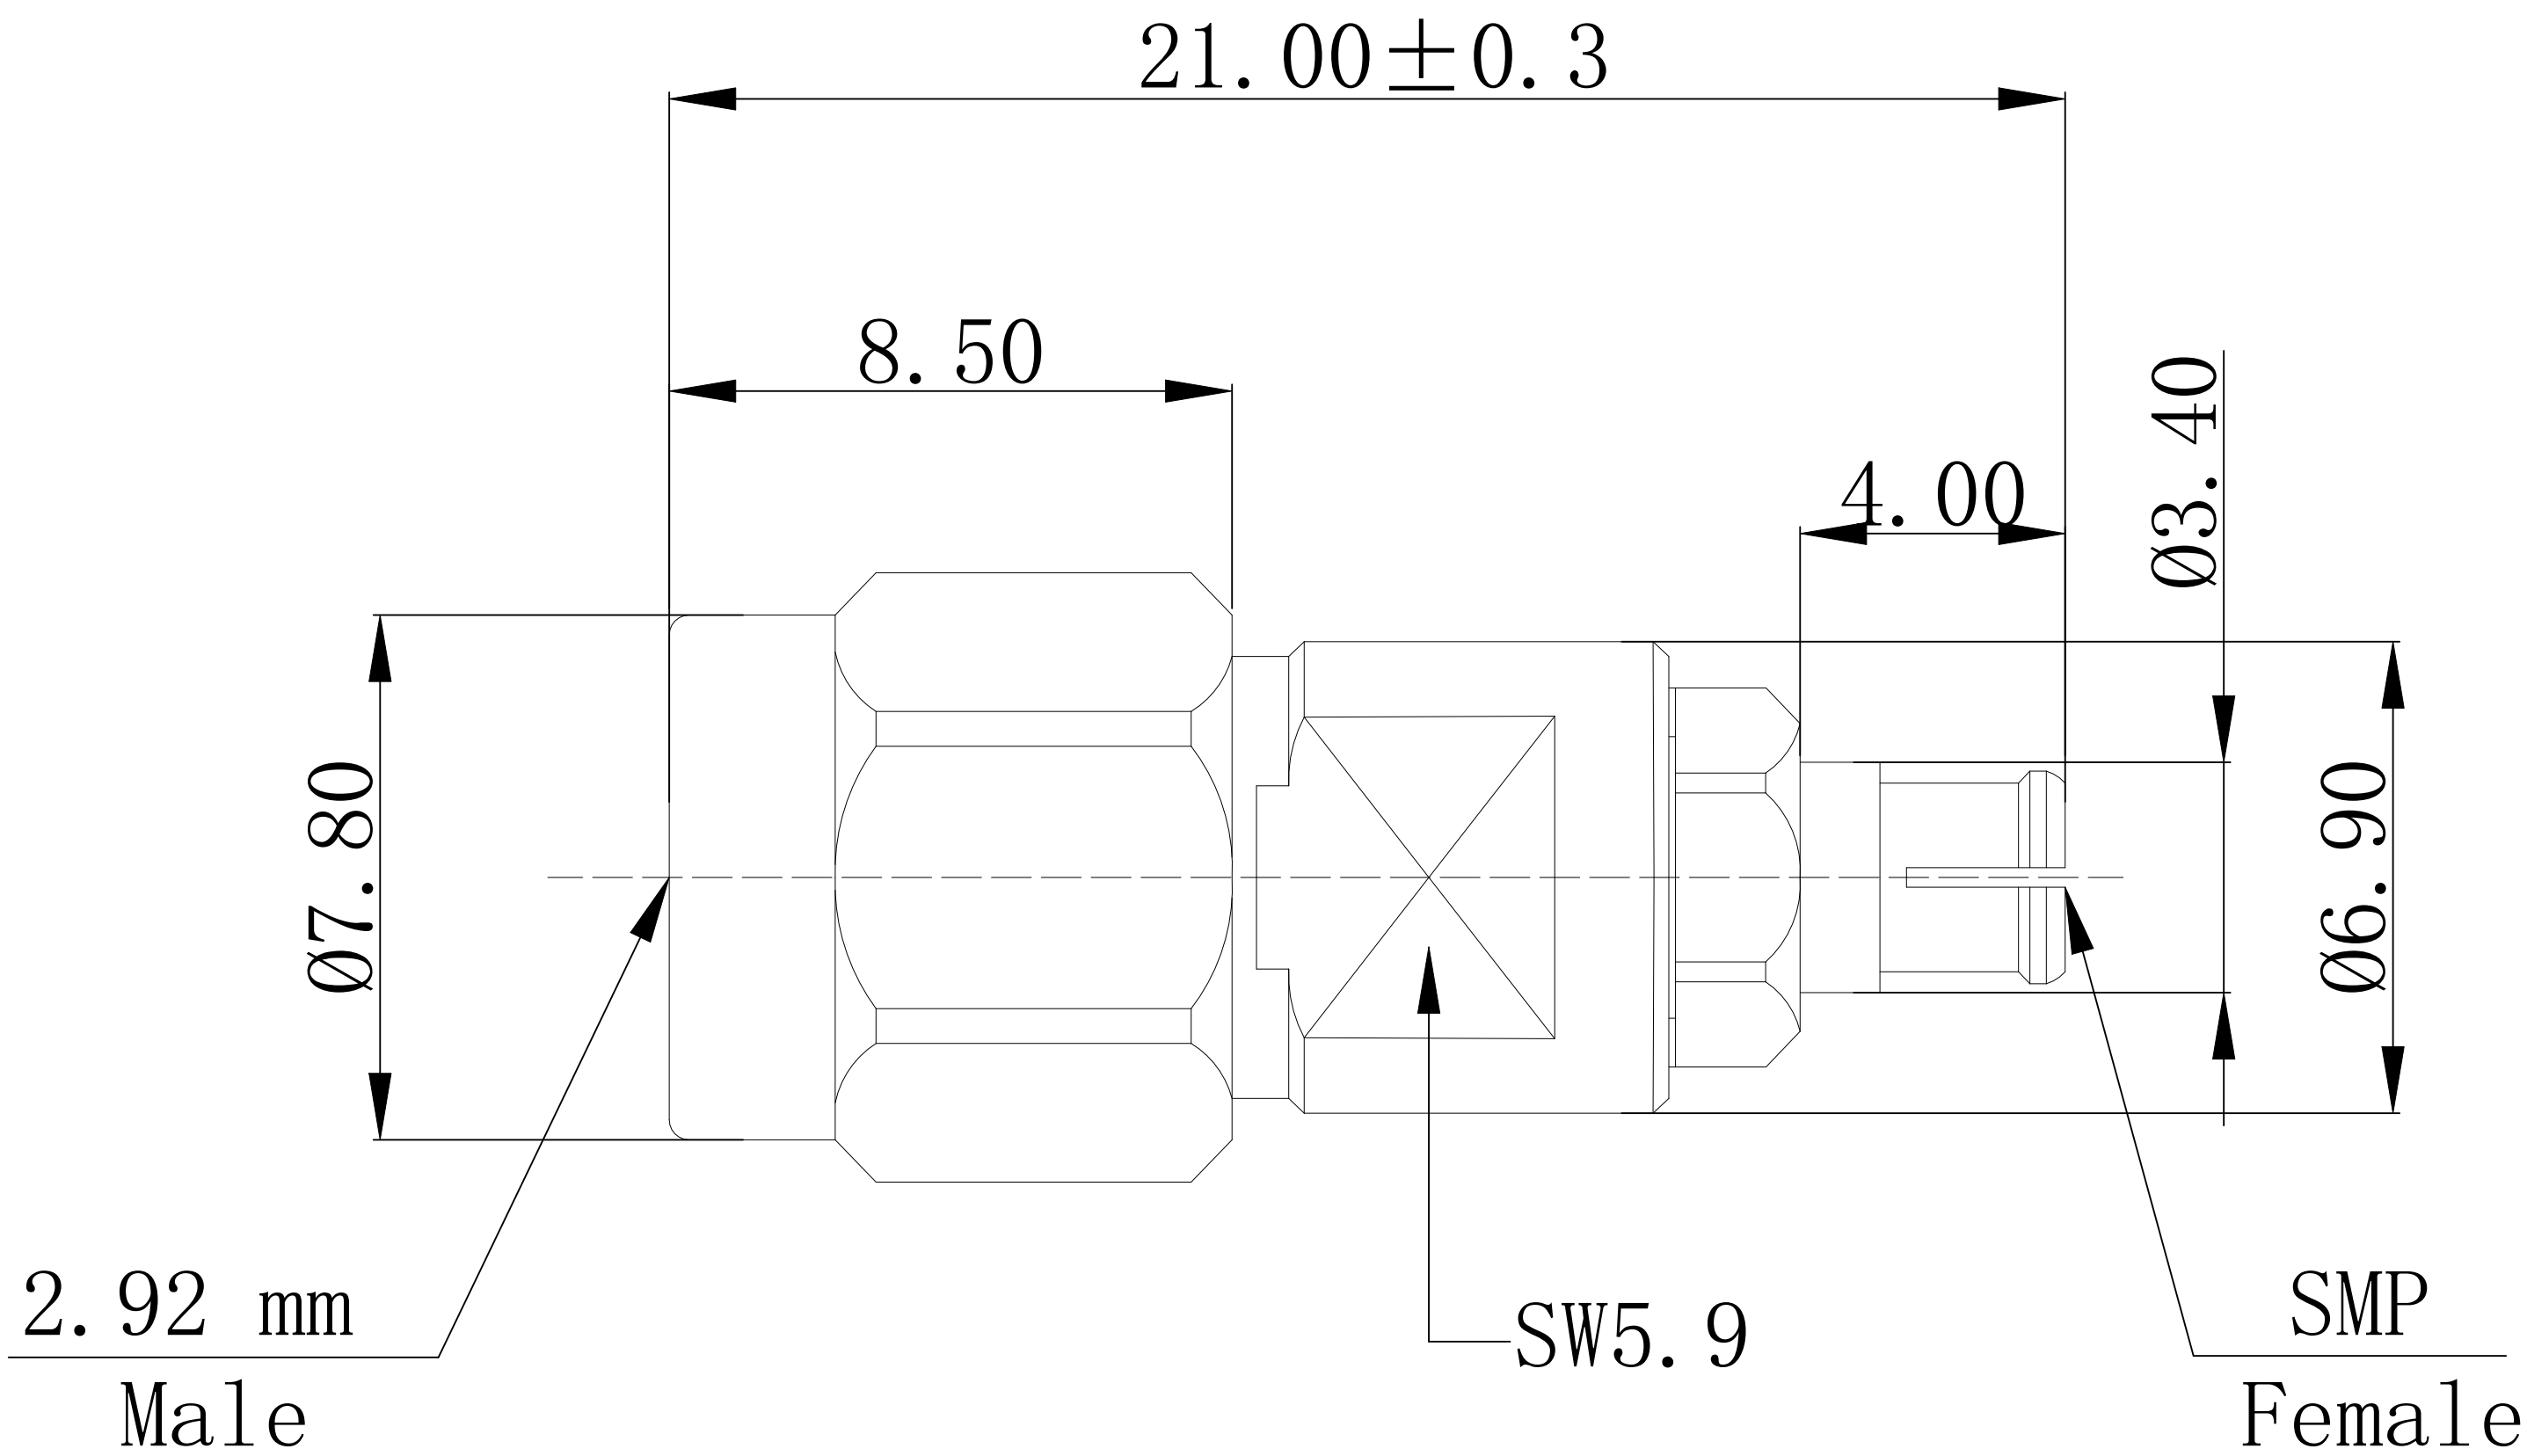

Product Parameters:

Impedance: 50 Ω

Frequency Range: DC-40GHz

Standing Wave Ratio (VSWR): 1.35:1(max)

Dielectric withstand voltage:1000V

Service life: ≥500

Insulation Resistance: ≥5000MΩ

Specifications

A connector type:2.92mm Male

B connector type:SMP Female

Operation Temperature:-55℃~+165℃


Material

Inner conductor material:Beryllium bronze Gold plating

External conductor material:Stainless steel passivated

Insulator:PEI&PTFE

Customer Part Number: RHT-2.92-SMP-JK-F

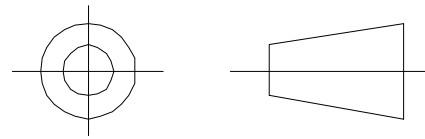-TOLERANCES- UNLESS OTHERWISE SPECIFIED	 RENHOTECH GROUP					
			PART DESCRIPTION: 2.92 MALE TO SMP FEMALE CONNECTOR			
	Appr: JIM. KING		P/N: RHT-639-7140			
	Check:		Date	Scale	Unit	Type
Draw: Gavin		2025. 03. 12	Free	MM	Z	1/1
UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 - 8mm ± 0.20mm 8 - 30mm ± 0.25mm 30 -120mm ± 0.30mm						