




REV	DESCRIPTION	DWN	DATE	APPROVEN
R1.0	First issue	Gavin	2025/08/19	JIM. KING

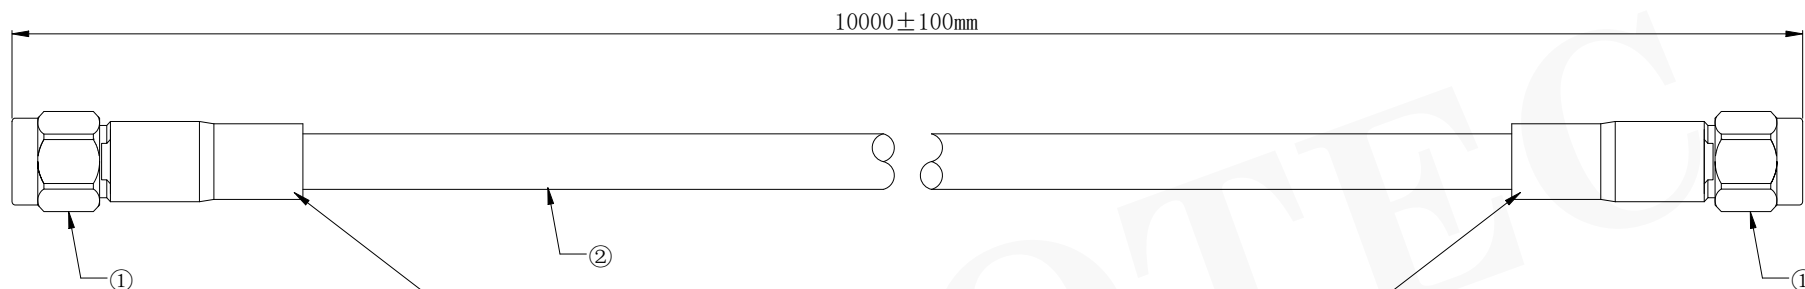

No heat-shrink tubing is required on the product.
产品上不需要热缩管。

1. ELECTRICAL CHARACTERISTICS :
- 1.1 IMPEDANCE: 50 Ω.
 - 1.2 INSULATION RESISTANCE: $\geq 5000M \Omega$
 - 1.3 FREQUENCY RANGE: DC-18GHz.
 - 1.4 VSWR: $\leq 1.25@DC-18GHz$;
 - 1.5 INSERTION LOSS: $\leq 10.85dB@DC-18GHz$
 - 1.6 DIELECTRIC WITHSTANDING VOLTAGE: $>1500 V@DC$

2. MECHANICAL CHARACTERISTICS :
- 2.1 DURABILITY: >500 CYCLES.

3. ENVIRONMENTAL CHARACTERISTICS :
- 3.1 TEMPERATURE RANGE : $-55^{\circ}+165^{\circ}C$

2	Cable	RHB480, Jacket:FPE Gray, OD:4.8mm	1
1	Connector	SMA Male, Stainless Steel, Passivated	2
NO	PART NAME	DESCRIPTION	QTY

-TOLERANCES- UNLESS OTHERWISE SPECIFIED	 仁昊伟业 RENHOTEC		RENHOTEC GROUP				
	 	PART DESCRIPTION: SMA MALE TO SMA MALE FOR RHB480 CABLE					
UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 - 8mm ± 0.20mm 8 - 30mm ± 0.25mm 30 -120mm ± 0.30mm	Appd: JIM. KING	P/N: RHT-605-20135					
	Check:	Date	Scale	Unit	Type	Page	
	Draw: Gavin	2025.08.19	Free	MM	Z	1/1	