




Product NO.		RHT-605-9498		
REV	DESCRIPTION	DWN	DATE	APPROVEN
R1.0	First issue	Gavin	2024/06/27	JIM.KING

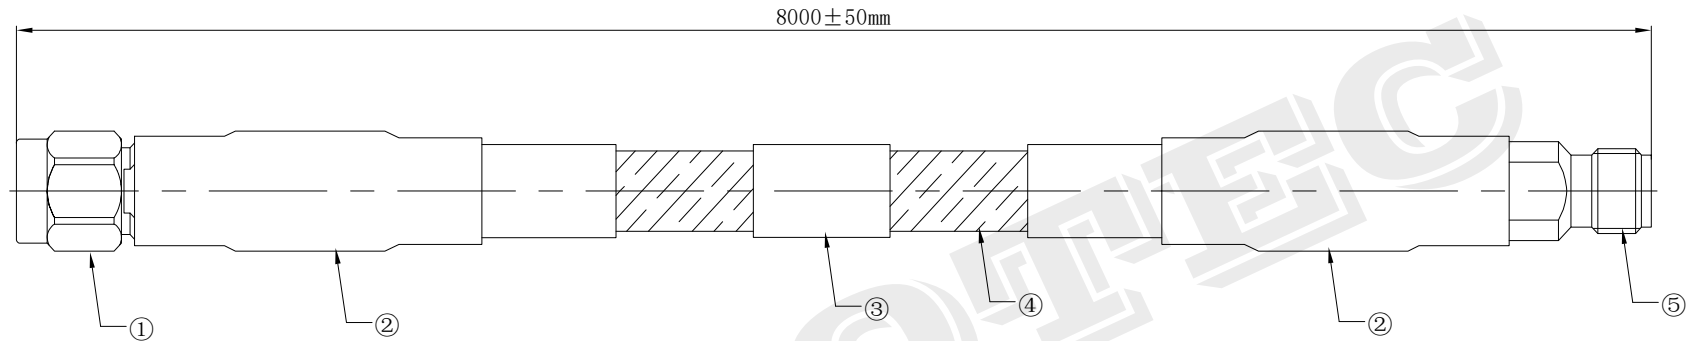

一. ELECTRICAL CHARACTERISTICS :

1. IMPEDANCE:50 Ω.
2. FREQUENCY RANGE:DC~40GHz.
3. VSWR: ≤1.30:1@DC~40GHz;
4. INSERTION LOSS: ≤26dB@DC~40GHz
5. DIELECTRIC WITHSTANDING VOLTAGE:>1000 V@DC
6. Phase Balance: ≤ 8@40G
7. Amplitude Balance:<0.1dB@40G
8. Shielding efficiency:>90dB

二. MECHANICAL CHARACTERISTICS :

1. DURABILITY:>500 CYCLES.
 2. Minimum bending radius (static): 18.0mm
 3. Minimum bending radius (dynamic): 36.0mmMinimum bending
- 三. ENVIRONMENTAL CHARACTERISTICS :
1. TEMPERATURE RANGE : -55~+85 °C

5	Connector 2	2.92mm Female, Stainless Steel, Passivated	1
4	Cable	RT360, Jacket:FPE Blue, OD:3.60mm	1
3	Cable labels	Heat shrink tubing or other materials	1
2	Heat shrink tubing	3 or 4 times adhesive heat shrink tubing, Black	2
1	Connector 1	2.92mm Male, Stainless Steel, Passivated	1
NO	PART NAME	DESCRIPTION	QTY

-TOLERANCES- UNLESS OTHERWISE SPECIFIED	 仁昊伟业 RENHOTECH		RENHOTECH GROUP				
		PART DESCRIPTION: 2.92MM MALE TO 2.92MM FEMALE FOR RT360 CABLE					
UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 ~ 8mm ± 0.20mm 8 ~ 30mm ± 0.25mm 30 ~120mm ± 0.30mm	Appd: JIM.KING		P/N: RHT-605-9498				
	Check:	Date	Scale	Unit	Type	Page	
	Draw: Gavin	2024.06.27	Free	MM	Z	1/1	