




Product NO.		RHT-605-9499		
REV	DESCRIPTION	DWN	DATE	APPROVEN
R1.0	First issue	Gavin	2024/06/27	JIM.KING

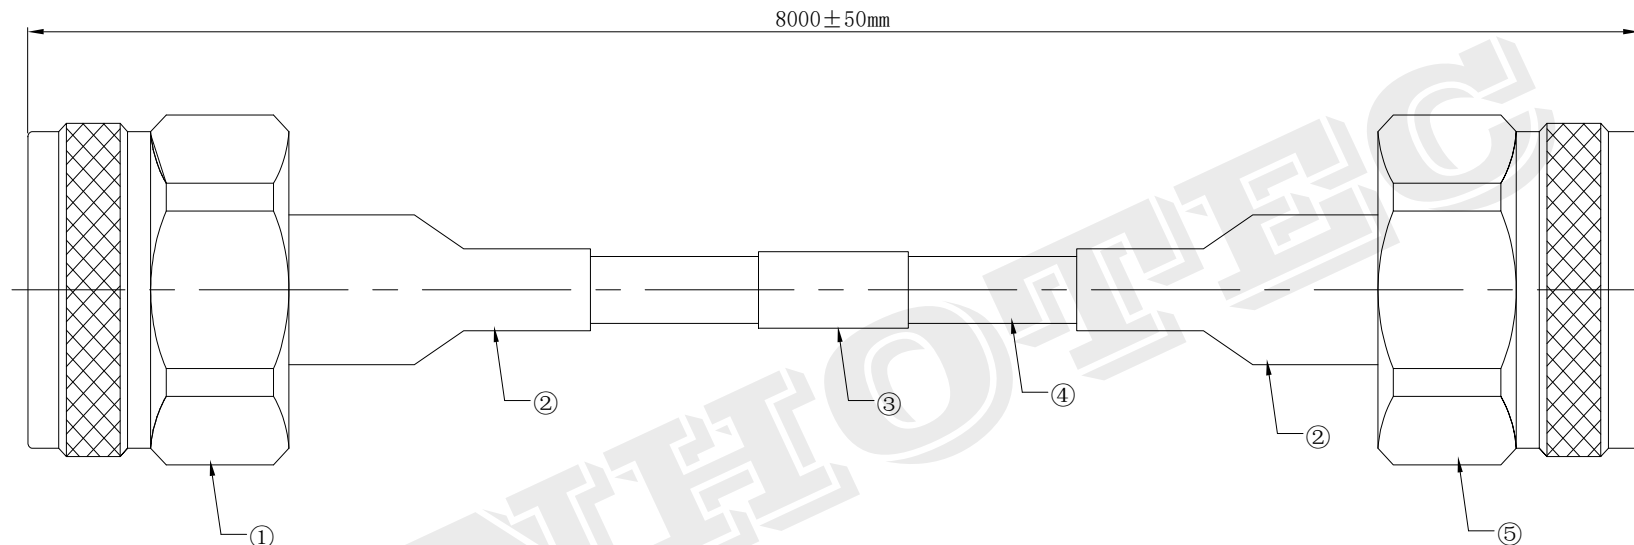

一. ELECTRICAL CHARACTERISTICS :

1. IMPEDANCE:50 Ω.
2. FREQUENCY RANGE:DC-18GHz.
3. VSWR: ≤1.25:1@DC-18GHz;
4. INSERTION LOSS: ≤9.5dB@DC-18GHz
5. DIELECTRIC WITHSTANDING VOLTAGE:>1000 V@DC
6. Phase Balance: ≤ 5@18G
7. Amplitude Balance:<0.1dB@18G
8. Shielding efficiency:>90dB


二. MECHANICAL CHARACTERISTICS :

1. DURABILITY:>500 CYCLES.
2. Minimum bending radius (static): 26.0mm
3. Minimum bending radius (dynamic): 52.0mmMinimum bending

三. ENVIRONMENTAL CHARACTERISTICS :

1. TEMPERATURE RANGE : -55~+85 °C

5	Connector 2	N Male, Stainless Steel, Passivated	1
4	Cable	RT520, Jacket:FPE Blue, OD:5.20mm	1
3	Cable labels	Heat shrink tubing or other materials	1
2	Heat shrink tubing	3 or 4 times adhesive heat shrink tubing, Black	2
1	Connector 1	N Male, Stainless Steel, Passivated	1
NO	PART NAME	DESCRIPTION	QTY

-TOLERANCES- UNLESS OTHERWISE SPECIFIED	 仁昊伟业 RENHOTEC RENHOTEC GROUP					
		PART DESCRIPTION: N MALE TO N MALE FOR RT520 CABLE				
UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 - 8mm ± 0.20mm 8 - 30mm ± 0.25mm 30 - 120mm ± 0.30mm	Appd: JIM.KING		P/N: RHT-605-9499			
	Check:		Date	Scale	Unit	Type Page
	Draw: Gavin		2024.06.27	Free	MM	Z 1/1