


SMB Connector Straight Jack Male Pin Solder 50 Ohm - RHT-626-0229



Drawing

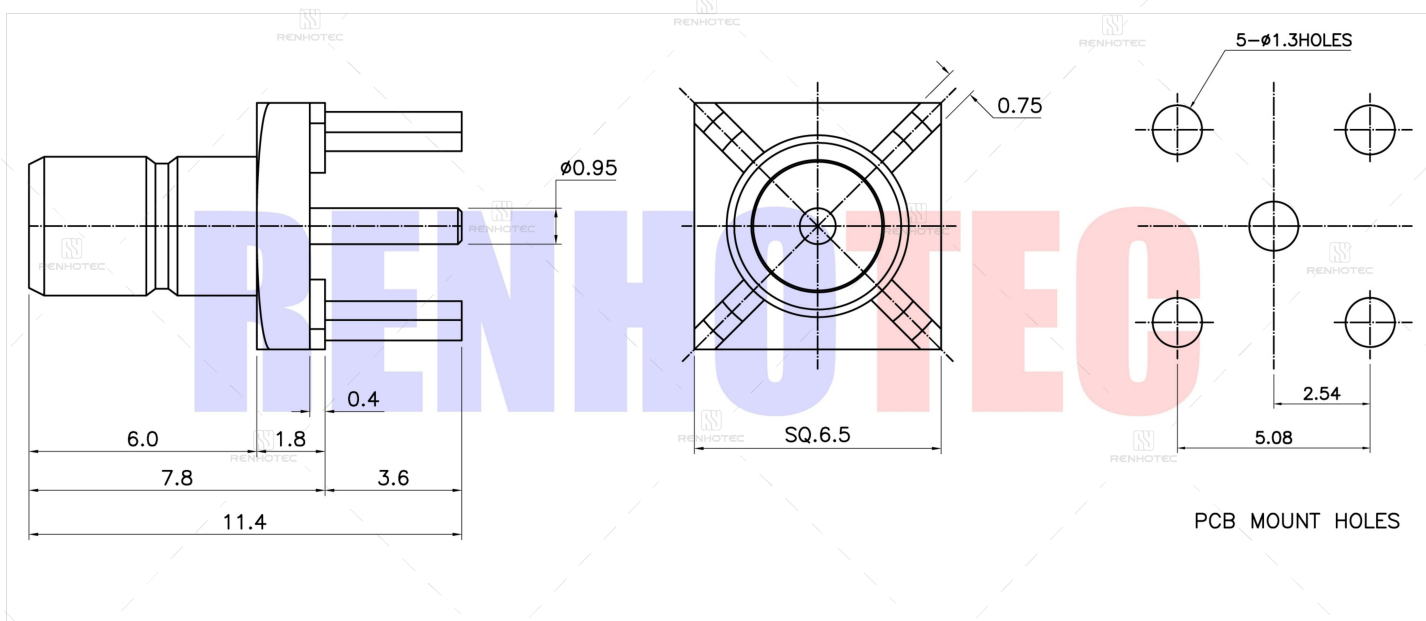

Basic Information

Connector Type	Jack
RF Series	SMB Type
Fastening Type	Snap On
Mounting Feature	Through Hole
Mounting Type	Panel Mount
Number of Ports	1
Orientation	Straight

Mechanical Specification

Contact Termination Style	Solder
Insertion Loss	0.6dB Max

Material and Finish

Component Description	Material	Finish
Shell	Copper	Gold Plated
Center Contact	Brass	Gold Plated
Insulator	Teflon	

Impedance Testing

Impedance	50 ohm
-----------	--------

Frequency & VSWR Test Report

Frequency Range

4GHz



Contact Resistance Test

Contact Type

Male Pin




Working Voltage & Insulation Resistance Test

Rated Voltage

335V rms

Insulation Resistance

1000 Ohms min

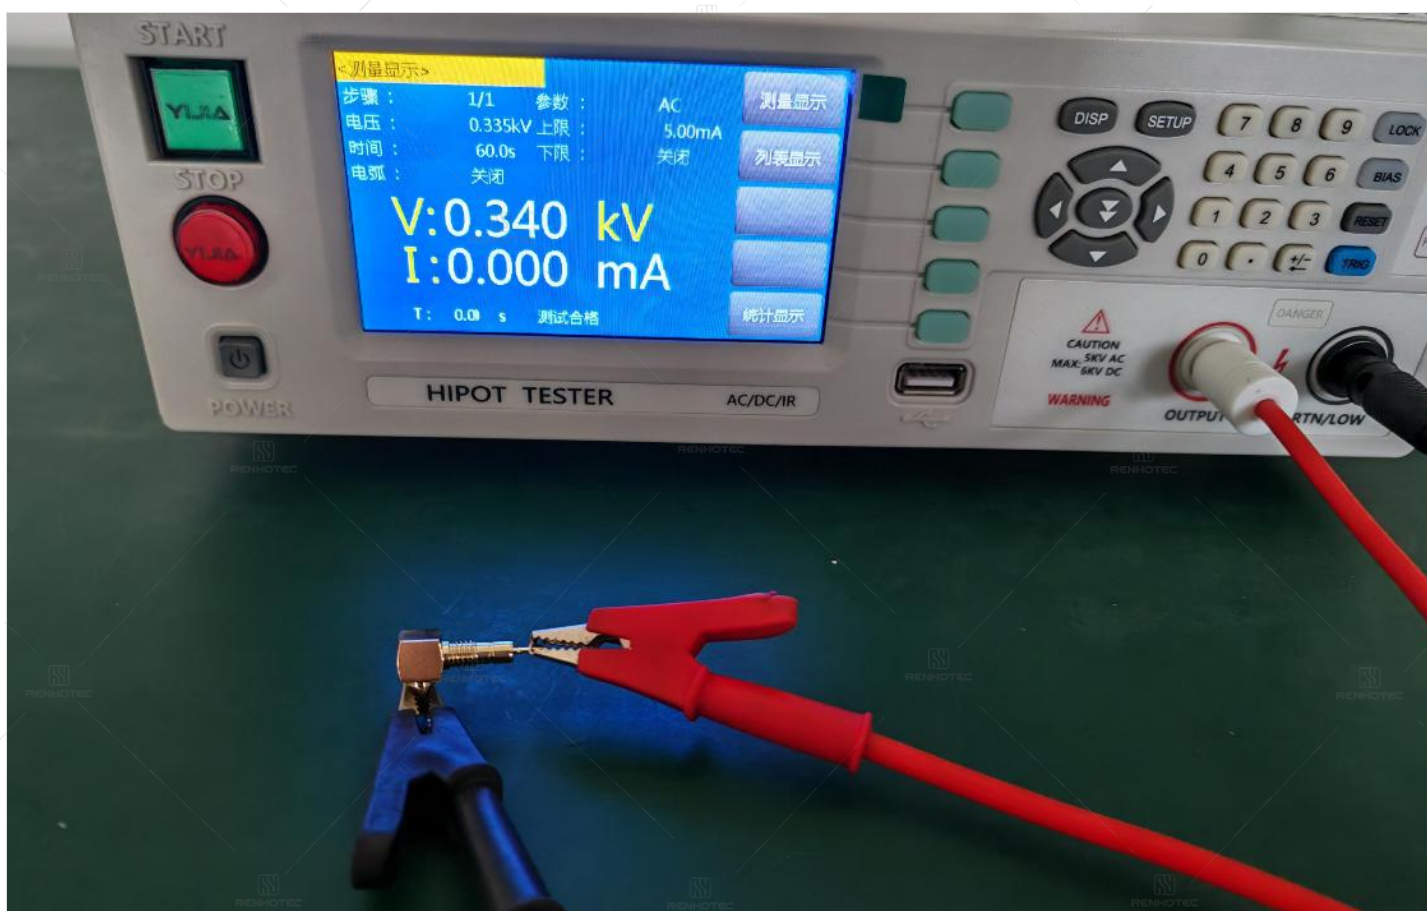

Version History

REV	Date	Revise Contents	Drafter	Approver
A.0	2026.7.16	The initial formulation	Esther	Joson

Disclaimer

The information in this specification is subject to change without notice. Please confirm the latest version before use. Technical parameters are for reference only, and sufficient testing and verification should be conducted in actual applications.