



## MMCX Connector Male Connector PCB Mount Through Hole 50ohm - RHT-631-0117

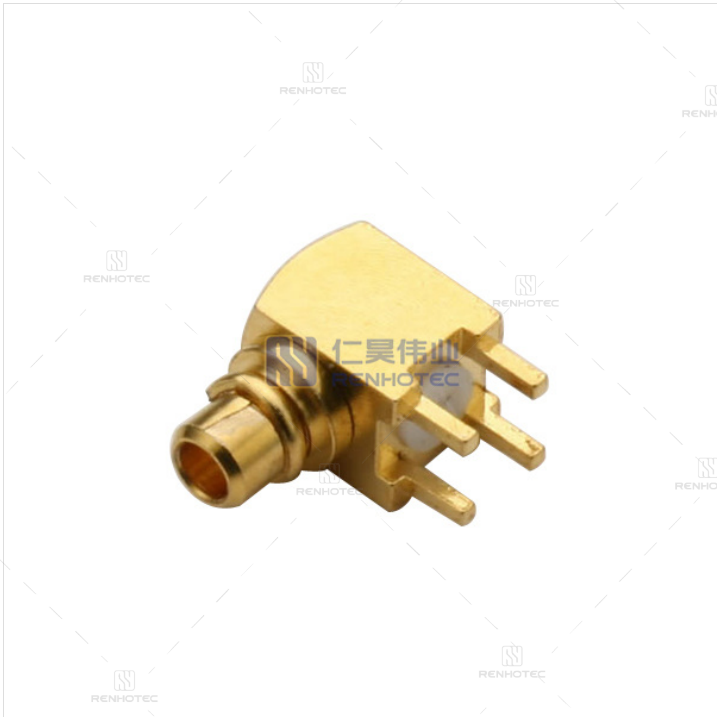

### Drawing

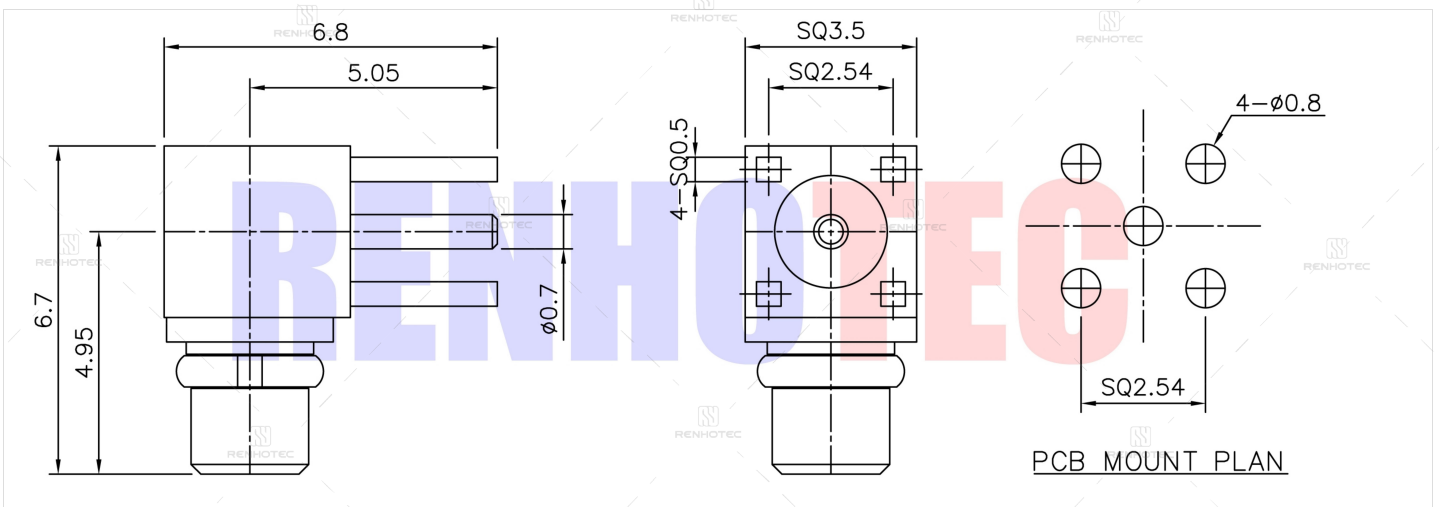

### Basic Information

|                 |             |
|-----------------|-------------|
| Connector Type  | Plug        |
| Fastening Type  | Snap On     |
| Mounting Type   | Panel Mount |
| Number of Ports | 1.0         |
| Orientation     | Right Angle |
| RF Series       | MMCX Type   |

## Environmental Specification

|                      |                       |
|----------------------|-----------------------|
| Corrosion Resistance | MIL-STD-202 Meth. 101 |
| Temperature Range    | -65°C to +165°C       |
| Vibration            | MIL-STD-202 Meth. 204 |

## Mechanical Specification

|                           |              |
|---------------------------|--------------|
| Contact Termination Style | Solder       |
| Mating Durability         | ≥ 500 Cycles |

## Material Specification

|                    |        |
|--------------------|--------|
| Shield Termination | Solder |
|--------------------|--------|

## Material and Finish


| Component Description | Material     | Finish      |
|-----------------------|--------------|-------------|
| Shell                 | Brass        | Gold Plated |
| Insulator             | PTFE         |             |
| Center Contact        | Copper Alloy | Gold Plated |

## Impedance Testing

|           |        |
|-----------|--------|
| Impedance | 50 ohm |
|-----------|--------|

## Frequency & VSWR Test Report

|                 |                                         |
|-----------------|-----------------------------------------|
| Frequency Range | 6GHz                                    |
| VSWR            | ≤1.15 (DC to 4 GHz), ≤1.40 (4 to 6 GHz) |

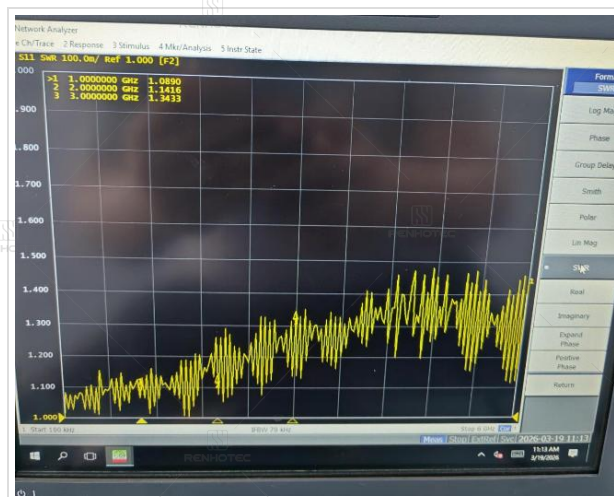

## Contact Resistance Test

|                           |          |
|---------------------------|----------|
| Contact Type              | Male Pin |
| Center Contact Resistance | 5 MΩ Min |
| Outer Contact Resistance  | 1 MΩ Min |



## Working Voltage & Insulation Resistance Test

|                                 |                              |
|---------------------------------|------------------------------|
| Rated Voltage                   | 500 Volts RMS Max Continuous |
| Dielectric Withstanding Voltage | 1000 VRMS Max                |
| Insulation Resistance           | 500MΩ Min                    |



Version History

| REV | Date     | Revise Contents         | Drafter | Approver |
|-----|----------|-------------------------|---------|----------|
| A.0 | 2026.7.7 | The initial formulation | Esther  | Joson    |

Disclaimer

The information in this specification is subject to change without notice. Please confirm the latest version before use. Technical parameters are for reference only, and sufficient testing and verification should be conducted in actual applications.