




REV	DESCRIPTION	DWN	DATE	APPROVEN
A	First issue	Gavin	2026/04/14	JIM. KING
B	Change the cable length to 3250mm and 750mm USB 3.0 Male connector changed to USB 3.1 Male	Gavin	2026/04/15	JIM. KING

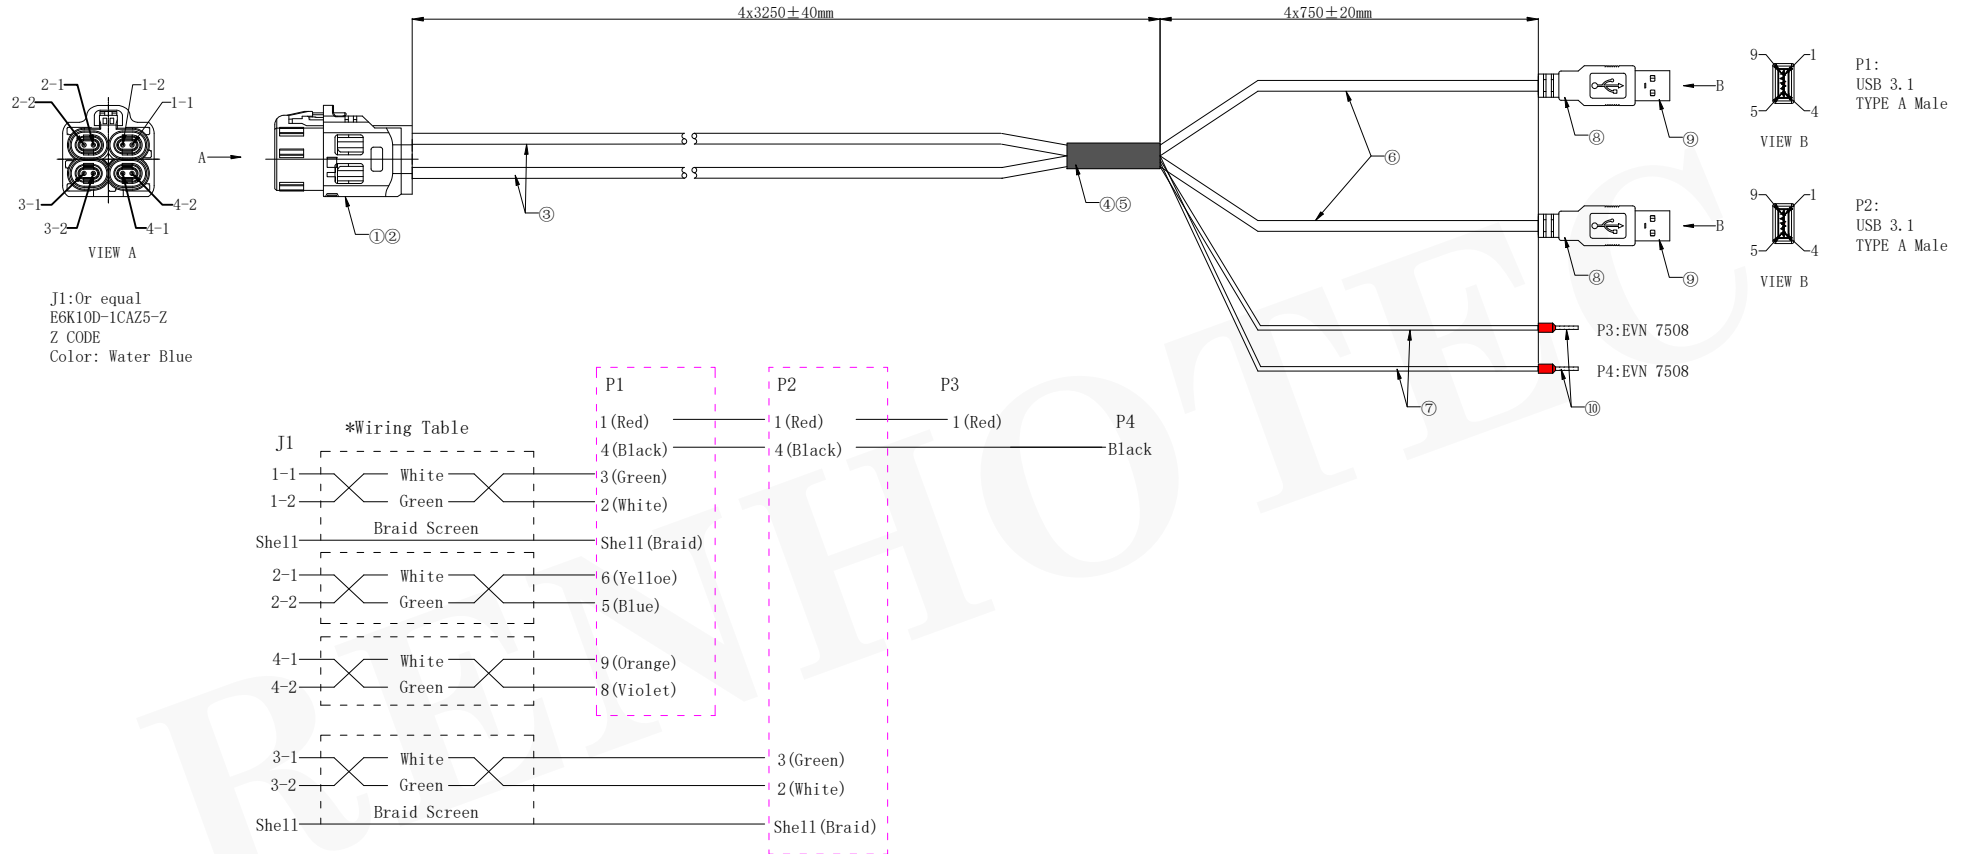

10	Terminal	TG-JT (EVN0708), Brass, Nickel Flash, For 0.5mm ² Cable, Jacket: RED	2
9	Connector P2 P3	USB 3.1 TYPE A Male Insulator: Blue	2
8	Molding	PVC, Black	2
7	Wire	AWG20 Jacket; PVC (Red Black), OD: 1.6mm	2
6	Cable	28AWG*2C+28AWG*1P+ (28AWG*1P+AL+F)*2+D+Braid	2
5	Heat Shrink Tubing	Adhesive heat shrink ratio 3:1, Black, L=50mm, ID: 8mm	1
4	Heat Shrink Tubing	Black ID: 2-3mm	5-10
3	Cable	GG 2Speed® 251; Jacket: PVC, OD: REF4.0mm	4
2	Main body J1	Or equal E6K10A-1CAZ5; Brass, Nickel Plating	4
1	Shell J1	Or equal E6K10D-1CAZ5-Z; Z CODE, Color: Water Blue	1
No.	PART NAME	DESCRIPTION	Q'TY

-TOLERANCES- UNLESS OTHERWISE SPECIFIED	 东莞市德索精密工业有限公司 Dongguan Dosin Precision Industry Co., Ltd					
	PART DESCRIPTION: H-MTD FEMALE TO USB TYPE A 3.0 MALE CABLE					
UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 - 8mm ± 0.20mm 8 - 30mm ± 0.25mm 30 - 120mm ± 0.30mm	Appr: JIM. KING	P/N: DOSIN-811-8401				
	Check:	Date	Scale	Unit	Type	Page
	Draw: Gavin	2026.04.15	Free	MM	Z	1/1