





4	5	6
REV	DESCRIPTION	DWN
R1.0	First issue	Gavin
		DATE
		2025/12/08
		APPROVEN
		JIM. KING

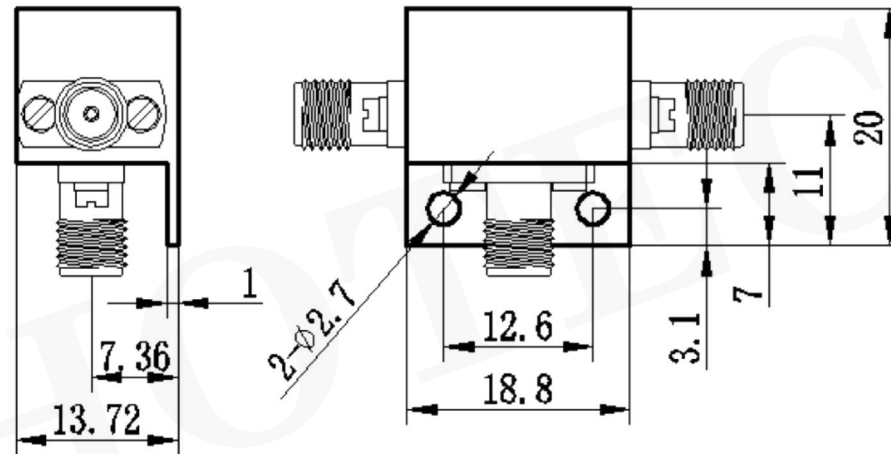

Electrical
Impedance:50Ω
Frequency Range: 10~3000MHz (0.01~3GHz)
Insertion Loss: Typ.1.5dB/Max2.0dB (未含理论损耗3.0dB)
Combined VSWR:Typ.1.80/Max.2.0
Distribution VSWR:Typ.1.70/Max.2.0
Isolation:Typ.16dB
Amplitude Balance:Typ.0.6dB/Max.1.0dB
Phase Balance:Typ.5° /Max.10°
Temperature Range: -40℃ ~ +85℃

Mechanical
Connectors: SMA-Female
Temperature Range: -40℃ ~ +85℃
Outline Dimensions: 18.8*13*13.72mm
Weight: 12g
Surface Finishing: Sandblasting natural

-TOLERANCES- UNLESS OTHERWISE SPECIFIED	 仁昊伟业 RENHOTEC		RENHOTEC GROUP			
			PART DESCRIPTION: SMA MOTHER HEAD 1/2 POWER DIVIDER			
UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 - 8mm ± 0.20mm 8 - 30mm ± 0.25mm 30 - 120mm ± 0.30mm	Appd: JIM. KING		P/N: RHT-639-7101			
	Check:		Date	Scale	Unit	Type
	Draw: Gavin		2025. 12. 08	Free	MM	Z
				Page		
					1/1	