




Product NO.

RHT-612-0272

REV	DESCRIPTION	DWN	DATE	APPROVEN
R1.0	First issue	Mr Wang	2017/03/02	JIM. KING
R2.0	Frequency range:DC~6GHZ,Brass Gold plating	Gavin	2023/10/16	JIM. KING

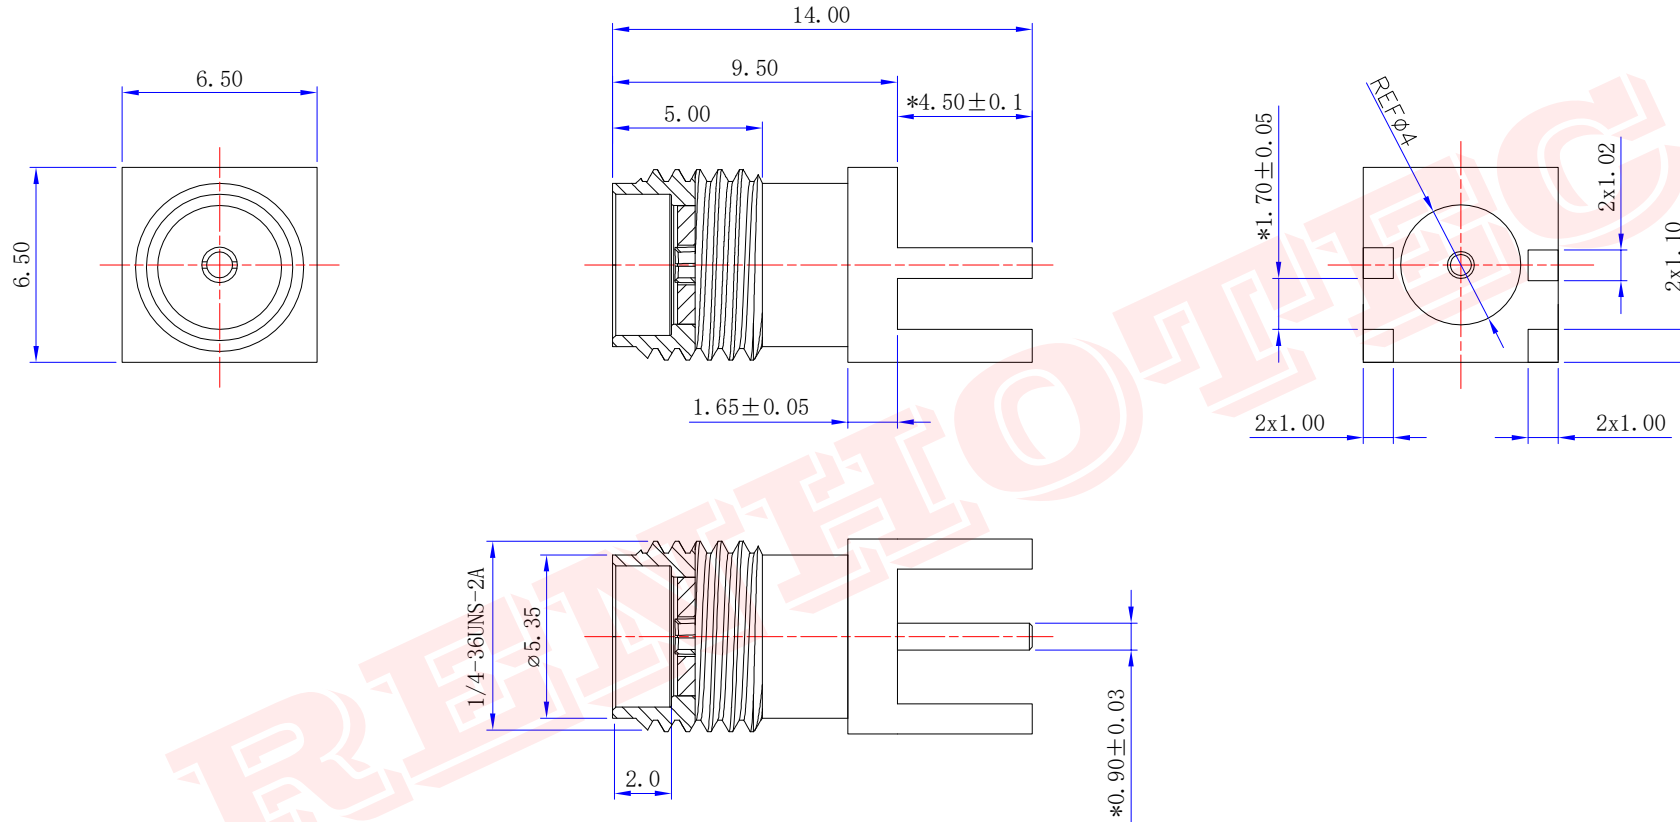

Specifications:

IMPEDANCE: 50 Ohms
 Frequency range:DC~6GHZ
 VSWR:1.5MAX
 Voltage Rating:335 Volts RMS Continuous
 Dielectric Withstanding Voltage:1000 VRMS
 Insulation Resistance:500MΩ
 MinMinTemperature range:-55°C TO +165°C

NO	DESCRIPTION	MATERIAL	FINISH	QTY
3	Center pin	Brass	Gold plating	1
2	Insulator	Teflon	None	1
1	Body	Brass	Gold plating	1

-TOLERANCES- UNLESS OTHERWISE SPECIFIED		RENHOTEC GROUP				
UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 - 8mm ± 0.10mm 8 - 30mm ± 0.15mm 30 - 120mm ± 0.20mm		PART DESCRIPTION: SMA Jack Edge Mount				
		Appd: JIM. KING		P/N: RHT-612-0272		
		Check:	Date: 2023. 10. 16	Scale: Free	Unit: MM	Type: Z
		Draw: Gavin				Page: 1/1